October 1983
Vol. 9, No. 10
$2.95

Emphasis On Education

creative computing®

the #1 magazine of computer applications and software

In-Depth Evaluations:

- Apple Lisa
- TRS-80 Model 4
- TRS-80 MC-10
- Olympia Compact Printer
- 22 Educational Packages
- HiPlot DMP-29 Plotter
- Centurion Computers
- Dow Jones Reporter
- Power Pad
- Businesspak+
- AtariWriter
- Apple Writer II
- CompTrol Lab
- Lancer and Clash

Using Adventures In The Classroom

9,250 Apples For The Teacher

Profile Of The Creative Individual

Communication For The Handicapped

Turtlegraphics For Atari

Printing Logo Graphics

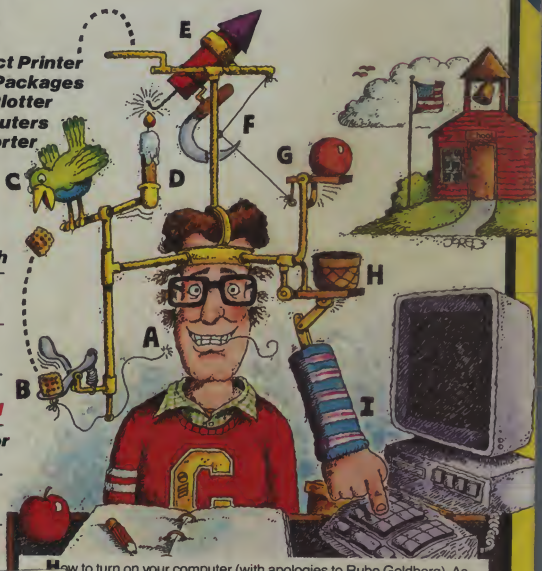

How to turn on your computer (with apologies to Rube Goldberg). As bite the string in your mouth (A) it sets off the spring-loaded spoon which releases the cracker. The bird jumps off his perch to catch the ker (C) and lands on the lower perch which raises the candle (D) g off thesky-rocket (E), which in turn, causes the sickle to cut the (F) and allows the orange to fall (G) landing in the basket (H) which pushes the arm bracket down (I) turning the computer on. If crackers are not allowed in the classroom, a nightcrawler will do fine.

14024 14044

WHILE OTHER COMPUTER COMPANIES ARE BUSY SETTING NEW PRICES,
SPECTRAVIDEO IS BUSY SETTING NEW STANDARDS.

MSX™ and LOGO™: Two Spectravideo is in Personal

While price wars and confusion reign all around us, Spectravideo goes about its business, setting standards by which all other personal computers will soon be judged. MSX and LOGO are the two latest examples of how Spectravideo is rocking–and reshaping –the personal computer industry.

MSX AND LOGO.

It is now history that, on June 15 1983, Spectravideo, Inc. joined with most of Japan's largest electronics firms to launch MSX: The most far-reaching personal computer standard in history. MSX is the name given to a specific hardware/software configuration that makes product interchangeability possible. While Spectravideo is proud to participate in MSX, we are even prouder of this fact: It was our own SV-318 computer that was used as a prototype for the MSX design! There are two important aspects to this.

First, all future MSX hardware–i.e. computers, peripherals, appliances–will be based on several key design elements of the SV-318. What does this mean to you, the consumer? A great deal, because when you buy an SV-318, you will not only be able to use all of Spectravideo's own software and hardware–you'll also be able to take advantage of all the remarkable new equipment that will be coming from other MSX participants.

In addition, the software aspect of MSX was largely inspired by the software built into the SV-318. From the outset, Spectravideo offered built-in Microsoft BASIC as its resident interpreter. Now, Microsoft

FOR UNDER $300.
FOR KEYBOARD ONLY

32K ROM EXPANDABLE TO 96K 32K RAM EXPANDABLE TO 256K

more reasons why leading the way Computers.

also makes a LOGO program compatible with the SV-318. It was Spectravideo's Microsoft BASIC/LOGO that helped to make MSX possible.

Another standard that Spectravideo can take credit for is the built-in Joystick/Cursor Control. Built right into the SV console, this control is always at fingertips and is much easier and faster to use than external joysticks or conventional editing controls. Certain engineering elements that helped to make this built-in control possible have also been incorporated into MSX.

OTHER STANDARDS OF EXCELLENCE.

While these are the computer standardizations that Spectravideo helped to initiate, they by no means represent the whole SV-318 story. This remarkable computer has also established many standards of excellence that other personal computers now aspire to:

- ***Built-In Super Extended Microsoft BASIC***–*Makes the SV-318 the first truly programmable affordable computer!*
- ***Extraordinary Memory***–*32K ROM expandable to 96K, and 32K RAM expandable (via bank switching)to an amazing 256K.*
- ***Unparalleled Expandability***–*A full supporting system of 14 peripherals, including our new Colecovision™ Game Adapter, 7-Slot Expander Unit, Floppy Disk Drive, Data Cassette, Interface Cartridges, etc.*
- ***More Available Software***–*Built-in CP/M compatibility gives you immediate access to over 3,000 existing software programs. Plus, you can utilize Spectravideo's own fine software library.*
- ***Advanced Graphics Capabilities***–*The SV-318 offers 16 colors in high resolution, and more importantly, 32 programmable sprites that allow tremendous control of movable screen objects.*
- ***Many other fine features***–*Such as Z80A Microprocessor with fast (3.6) internal clock, top-loading cartridge slot, 10 user-programmable special function keys, 3 sound channels (8 octaves per channel), low profile and attractive styling.*

SPECTRAVIDEO™

Computer systems you'll grow into, not out of.

SPECTRA VIDEO, INC 39 W. 37TH STREET NEW YORK, N.Y. 10018

Spectravideo's personal computers are supported by a full line of high-quality peripheral products

MSX
compatible software standard

SV-903 DATA CASSETTE

SV-601 SUPER EXPANDER

SV-902 FLOPPY DISK DRIVE


SV-800 SERIES EXPANSION CARDS

CP/M is a trademark of Digital Research, Inc.

Finally, aliens your kids can reason with instead of destroy.

Spinnaker computer games are lots of fun. They're also instructive. Not destructive. That's why IN SEARCH OF THE MOST AMAZING THING™ lets your kids negotiate with aliens. Not destroy them.

IT'S AMAZINGLY FUN!

The Most Amazing Thing is out there somewhere. Finding it won't be easy. Luckily, your kids will have the help of old Uncle Smoke Bailey. Because they'll have to fly the B-liner, avoid dangerous Mire Crabs, and trade with aliens.

It takes skill, persistence and imagination to find The Most Amazing Thing. Because it's the most elusive thing in the whole wide galaxy. But that's what makes it so exciting.

IT'S AMAZINGLY EDUCATIONAL!

Like all Spinnaker games, IN SEARCH OF THE MOST AMAZING THING has real educational value.

Your kids will sharpen their ability to estimate distances and quantities, and will become more aware of direction and time. They'll develop a knack for economic principles, and learn to solve problems through trial and error.

So if you're looking for exciting computer games that give your kids something to think about, just go IN SEARCH OF THE MOST AMAZING THING at your local retailer.* It's so much fun you'll probably be tempted to play it yourself.

*IN SEARCH OF THE MOST AMAZING THING is compatible with **Apple,®** **IBM,®** **Atari®** and **Commodore 64.™** computers.

SPINNAKER™

We make learning fun.

Apple, IBM and Atari are registered trademarks of Apple Computer, Inc., International Business Machines Corp. and Atari, Inc., respectively. Commodore 64 is a trademark of Commodore Electronics Limited.
IN SEARCH OF THE MOST AMAZING THING™ computer program is a trademark of Spinnaker Software Corp.
© 1983, Spinnaker Software Corp. All rights reserved.

FCM™: The Filing, Cataloging and Mailing List Program that does everything.

FCM, formerly 1st Class Mail, is a lot more than just the best mailing list program you can buy. Because along with being the most flexible and easy-to-use mailing list program there is, FCM also handles a number of other tasks more easily than any other program of its kind.

You can use FCM for anything you'd keep on file. Like your address book, household bills, stamp or coin collections, Christmas card list (know who sent you a card last year), fishing gear inventory or medical records.

Or how about a list of important dates (FCM will let you flag them by name, date and occasion). Or maybe you'd like to use FCM for a guest list for a wedding. FCM will even record RSVP's, gifts and thank you notes.

What's more, FCM is incredibly easy to use.

Special Features

FCM lets you create your own mailing label. Which means you can make your labels look the way you want them to. You can even decide to print right on the envelope. Or add a special message line like "Merry Christmas" or "Attention: Sales Manager." FCM is extremely flexible.

And speaking of flexible, FCM lets you search and sort in any of 12 different categories. So you can organize mailings any way you want: by state, company name, zip code or whatever you like. If you're using FCM to catalog your home library, you might want to sort by title, author or category. It's completely up to you.

But one of the best parts about FCM is being able to create your own headings. Because that lets you store, file and catalog just about anything you'd like to keep tabs on.

The Form Letter Feature*

FCM is compatible with many word processing programs such as Screenwriter II, Applewriter I/II/IIe, Apple Pie, Pie Writer, WordStar/MailMerge and Magic Window I/II. Just a few simple commands and you can automatically combine your form letters with your mailing list for professionally formatted documents.

Stop by your Continental Software dealer. Or call us today to find out all about FCM. No matter what you're cataloging, from a household inventory for insurance purposes to a 25,000 person mailing list, FCM is the best program you can buy.

It's true, you still have to lick the stamp. But we're working on it.

Available for Apple II/IIe, IBM PC/PC XT, Commodore 64, Texas Instruments Professional.

*Available on most versions.

For your free 64 page booklet, "Tips for Buying Software" and complete product catalog, please write Continental Software, Dept. CC, 11223 S. Hindry Avenue, Los Angeles, CA 90045, 213/417-8031, 213/417-3003.

Continental Software

A division of Arrays, Inc

Well, almost.

CIRCLE 140 ON READER SERVICE CARD

in this issue...

evaluations & profiles

12 **In Love With Lisa** ..... *Merken*
Apple makes a hit

24 **TRS-80 Model 4** ..... *Gray*
More business oriented than the Model III

39 **TRS-80 MC-10** ..... *Linzmayer*
Too little, too late for too much?

44 **Centurion Educational Computers** ..... *Ahl*
Self-contained drill and practice machines

52 **The Legend Of Power Pad** ..... *Devlin*
A tabula rasa for the creative programmer

59 **Houston Instruments HiPlot DMP-29** ..... *Ahl*
A versatile resource for graphic expression

69 **Olympia Electronic Compact Printer** ..... *Fastie*
Typewriter and printer combination

79 **Businesspak+** ..... *Hart*
Getting down to business with the TRS-80 Model 100

84 **Dow Jones News and Quotes Reporter** ..... *Costarakis*
Up-to-the-minute information for investors

92 **AtariWriter** ..... *Leyenberger*
An almost complete word processor

101 **Apple Writer II** ..... *Arrants*
An old favorite re-designed for the IIe

107 **Educational Games For The Very Young** ..... *Murphy*
Stickybears, Alphabet Beasts and more

120 **Growing Up Literate** ..... *Ahl, Murphy & Staples*
The state of the language arts

149 **Adventures In Education** ..... *Unwin*
Using fantasy/role-playing games in the classroom

158 **Educational Games For The TI 99/4A** ..... *Van Tyle*
Some are more educational than others

166 **Joust Comes Home** ..... *Linzmayer*
Lancer and Clash for the Color Computer

172 **EduTech CompTrol Lab** ..... *Ahl*
Computer-aided physics experiments

October, 1983
Volume 9, Number 10

ABC BPA

Creative Computing (ISSN 0 097-8140) is published monthly by Ahl Computing, Inc., a subsidiary of Ziff-Davis Publishing Company. Devid Ahl, President; Elizabeth B. Staples, Vice President; Selwyn Taubman, Treasurer; Bertram A. Abrams, Secretary. P.O. Box 789-M Morristown, N.J. 07960. Second Class postage paid at New York, NY 10001 and at additional mailing offices.

Copyright ©1983 by Ahl Computing, Inc. All rights reserved

Editorial offices located at 39 East Hanover Ave., Morris Plains, NJ 07950. Phone (201) 540-0445.
Domestic Subscriptions: 12 issues $24.97, 24 issues $43.97, 36 issues $57.97. POSTMASTER send address changes to Creative Computing, P.O. Box 5214, Boulder, CO 80321. Call 800-631-8112 toll-free (in New Jersey call 201-540-0445) to order a subscription

articles

181 **9,250 Apples For The Teacher** ..... *Uston*
Apple says "Kids Can't Wait"

185 **School Uses Of Microcomputers** ..... *Ahl*
Not quite what we expected

188 **How To Solve It** ..... *Piele*
The Third Annual Computer Problem Solving Contest

194 **Price Wars** ..... *Ahl*
A brief history of contemporary computing

196 **Profile Of The Creative Individual—Part 2** ..... *Raudsepp*
What makes a person creative?

applications & software

209 **Modular Arithmetic And Computer Art** ..... *Meger & Walling*
Interesting graphics for Apple, TRS-80 and TI

222 **Communicating In Code** ..... *Schneider*
Serial code keyboard helps the handicapped

242 **Game Paddles In The Lab** ..... *DeGilio*
Frivolous peripherals get a serious workout

254 **HTURTLE Revisited** ..... *Harrison & Harrison*
A turtlegraphics interpreter in Atari Basic

262 **Printing Logo Graphics** ..... *Beasley*
An easy way to save your masterpieces

266 **Mercury Mine** ..... *Guber*
A strategy game for Atari

272 **Purega** ..... *Rouselle*
Running your own restaurant

departments

6 **Input/Output** ..... *Readers*

282 **Apple Cart** ..... *Arrants*
Fixing FID, new books and new products

284 **Print About Printers** ..... *Anderson*
SuperScripsit, new printers and C. Itoh's full name

292 **Outpost: Atari** ..... *Anderson*
Books, new products and a mixed scrolling routine

302 **Commodore's Port** ..... *Knott & Prochnow*
Create a colorful seascape

306 **IBM Images** ..... *Glinert-Cole*
More on the 8023A and printer formatting in Basic

316 **TRS-80 Strings** ..... *Gray*
Pocket Computer programs and word processors

322 **Book Reviews** ..... *Gray*

staff

Founder/Editor-in-Chief	David H. Ahl
Editor	Elizabeth B. Staples
Managing Editor	Peter Fee
Associate Editors	John Anderson Joseph Devlin Stephen Arrants
Editor-at-Large	Ken Uston
Contributing Editors	Dale Archibald Charles Carpenter Will Fastie Susan Gilnert-Cole Danny Goodman Stephen S. Gray Glenn Hart Stephen Kimmel Brian Murphy Ted Nelson Harold Nowick Peter Payack Alvin Toffler Gregory Yob
Staff Writer	Owen Linzmayer
Copy Editor	Sherrie Van Tyle
Editorial Assistants	Andrew Brill Laura Gibbons
Art Director	Patrick Calkins
Assistant Art Director	Chris DeMilia
Artists	Diana Negri Rudio Eugene Bicknell Paul Krasner
Typesetting	Karen K.Brown
Advertising Director	Claude Sheer
Creative Computing Press	Laura Conboy
Operations Manager	Patricia Kennelly
Comptroller	Jennifer H. Shaler
Accounting	Joanne Saplo Alfred Nardi
Retail Marketing	Susan DeMark
Fulfillment	Frances Miskovich Rosemary Bender Linda Blank Pat Champion Elsie Graff Linda McCatharn Carol Vita Jim Zecchin Diane Moran Barbara Carnegie Lisa Dickisson David Stankus Maura Russell Donna Stiefel Cheryl Schaubie Valerie Gaddis
Shipping & Receiving	Ronald Antonaccio Strawvey Montgomery



advertising sales

Advertising Director
Claude Sheer
Creative Computing
Ziff-Davis Publishing Company
One Park Avenue
New York, NY 10018
(212) 725-3577

Advertising Coordinator
Ruth Darling
Creative Computing
Ziff-Davis Publishing Company
One Park Ave.
New York, NY 10016
(212) 725-3446

Northern California, Northwest
Jeff Milton
Ziff-Davis Publishing Company
3030 Bridgeway Blvd.
Sausalito, CA 94965
(415) 331-7133

Southern California, Southwest
Tom Whiteway
Ziff-Davis Publishing Company
3460 Wilshire Blvd.
Los Angeles, CA 90010
(213) 387-2100

New England
CEL Associates, Inc.
27 Adams Street
Braintree, MA 02184
(817) 848-9306

Midwest
Jeff Ednan
The Pattis Group
4781 W. Touhy Ave.
Lincolnwood, IL 60648
(312) 679-1100

Mid-Atlantic
Larry Levine
Ziff-Davis Publishing Company
One Park Ave.
New York, NY 10018
(212) 725-7868

Southeast
Browning Publications
P.O. Box 81308
Atlanta, GA 30366
(404) 455-3430

Canada
The Pattis Group
1823 Younge St.
Toronto, Ontario M4T 2A1
(418) 482-8288

Ziff Davis Consumer Computers & Electronics Magazine Division
President: Larry Sporn
Vice President Marketing: J. Scott Briggs
Vice President Circulation: Carole Mandel
Vice President/ General Manager: Eileen G. Markowitz
Creative Director: Peter J. Blank

permissions

Material in this publication may not be reproduced in any form without permission. Requests for permission should be directed to Bette Amado, Ziff-Davis Publishing Company, One Park Avenue, New York, New York 10016.

where to send it

All **editorial material**, including article submissions, press releases, and products for evaluation should be sent to:
Creative Computing
39 E. Hanover Ave.
Morris Plains, NJ 07950

Correspondence regarding other Creative Computing products and publications should also be sent to the Morris Plains address.

Correspondence related to **advertising**, including ad copy, questions on billing, and requests for rates, should be sent to:
Advertising Department
Creative Computing
Ziff-Davis Publishing Co.
One Park Ave.
New York, NY 10016

Correspondence regarding **subscriptions**, including orders, changes of address, and problems should be sent to:
Creative Computing
P.O. Box 5214
Boulder, CO 80321

Your help in choosing the correct address for your correspondence is appreciated. An incorrectly addressed letter or package can take as long as several weeks to reach its proper destination.

subscriptions

All subscriptions orders and other correspondence related to subscriptions should be addressed to:
Creative Computing
P.O. Box 5214
Boulder, Colorado 80321.

Foreign subscriptions must be accompanied by payment in U.S. currency.

Subscription prices:

U.S.	Canada	Foreign
1 year $24.97	1 year 29.97	1 year 34.97
2 years 43.97	2 years 53.97	2 years 63.97
3 years 57.97	3 years 72.97	3 years 87.97

Airmail delivery on foreign subscriptions is available for a one-year period only at $75.00 additional for mail to Asia and Australia, and $50.00 additional for all other foreign.

Subscribers in the United Kingdom may send payment in sterling to:
Hazel Gordon
10 Bishops Way
Sutton Coldfield
West Midlands B74 4XU

Please allow at least eight weeks for change of address. Include old address as well as new—enclosing if possible an address label from a recent issue.

attention authors

Creative Computing will not be responsible for the return of unsolicited manuscripts, cassettes, floppy disks, program listings, etc. not submitted with a self-addressed, stamped envelope.

NAME THAT KEY

(ALL 248 OF THEM!)

keyWiz® VIP

(Very Intelligent Peripheral)

THE FIRST
USER DEFINABLE KEYBOARD

- Define each key with up to 8 characters of your choice directly from your computer keyboard
- Redefine any key - anytime - for any software program
- Each key is completely user definable without software or disk interaction
- 62 user definable keys (31 lower case/31 shifted) per keyboard
- Stores up to 4 (62 key) keyboards in its own memory
- Switch between keyboards at the touch of a button making all 248 user defined keys available
- KeyWiz is complete - no other parts to buy or PROMs to purchase and does not disable your keyboard

TURN THE POWER OFF and
when you turn it on again
it's still there!

Full 1 Yeer Warrenty

ccp Creative Computer Peripherals Inc.

Aztec Environmental Center
1044 Lacey Road, Forked River, N.J. 08731
THE **BIG** NAME IN **SMALL** COMPUTER PERIPHERALS

ORDERS ONLY **800-225-0091**
INFORMATION 609-693-0002

VISA DEALER INQUIRIES INVITED MasterCharge

ALSO AVAILABLE
PRE-PROGRAMMED FUNCTION KEYBOARDS:
OUR STANDARD keyWiz 83
& keyWiz CONVERTIBLE

- Preprogrammed Auxiliery Keyboards with 30 Visicalc/ AceCalc Function Keys
- Available with a Numeric Key Pad (our Model "83") or or without ("Convertible" Model) works with any program
- Also available are the listed Word Processor Function Keys (Optionally on the "83" model for $40.00 and provided without charge in the "Convertible" Model)
- Why waste time memorizing word processor or Calc commands or stringing key strokes together when KeyWiz utilizes single key strokes labeled in plain English. KeyWiz makes it all understandable.
- 4 Arrow Keys for full cursor positioning - a great asset to any Calc or word processor user.
- End Users - KeyWiz completes your microcomputer package
- Dealers - KeyWiz makes it easier to sell software
- Educators - KeyWiz sherply reduces training time and saves you $ $ $
- OEM's - Provide a preprogrammed keyboard with that software package you're marketing. Call us about Custom Key Pads.

KeyWiz 83

Convertible

CURRENTLY AVAILABLE

Applewriter II
Screenwriter II
Super Text
Magic Window II
Word Star
Executive Secretary
SVS Word Handler
PIE Writer
Easy Writer

See us at

Apple Fest
Boston Computer Society

Moscone Center
San Francisco
Friday-Sunday
October 28-30, 1983

ORDER NOW

For the: ☐ APPLE II- ☐ APPLE II e or ☐ FRANKLIN ACE

Standard KeyWiz '83
☐ Visicalc / Acecalc Key pad w/numeric key pad 299.00
☐ With optionel Word Processor 339.00
(Choose one:)

KeyWiz Convertible
☐ Visicalc / Acecalc key pad w/Word Processor 299.00
(Choose one:)
☐ Custom Key Module (Send for specs) 40.00

KEYWIZ VIP for Apple II- ☐ or Apple IIE ☐
☐ User Definable Keyboard with plastic Applesoft Basic Template, Pascal Template and 2 Blanks 439.00

Add $8.00 Shipping/Handling to order
6% Sales Tax in New Jersey
Send $3.00 for our Informative Users Manual

KeyWiz is a registered trademark of CCP
Apple II is a registered trademark of Apple Computer Inc
Ace is a registered trademark of Franklin Computer Inc

CIRCLE 144 ON READER SERVICE CARD

tput...input/output...inpu

When Kids Are Ready

Dear Editor:

I was pleased to see an article on psychology ("My Five-Year Old Knows Basic") in the April 1983 issue of *Creative Computing*." However, I disagree with the major point of the article which was that children younger than 13 years old should not be taught how to program. This conclusion was based on the theory of the Swiss psychologist Jean Piaget. Although many of the experimental findings of Piaget are important, I think it is fair to say that *every* prediction of his theory concerning what children cannot learn that has been adequately tested has been disconfirmed. I am not advocating that everyone be forced to learn how to program at an early age. However, there is no reason that a child who is interested in computers should not be given the opportunity to learn how to program.

David M. Lane
Department of Psychology
Rice University
P.O. Box 1892
Houston, TX 77251

Glib Lib

Dear Editor:

I feel compelled to comment on Peter Favaro's article entitled, "My Five Year Old Knows Basic," (*Creative Computing*, April 1983). Mr. Favaro undertakes the task of presenting a theoretical framework to help parents and teachers make decisions about what and when children should learn about computers. While well-intentioned, Mr. Favaro's article can be added to a long list of educational wisdom literature; the literature in which we "apply theory to practice."

Applying developmental, cognitive or other psychological perspectives to teaching children is a very complex task, one filled with qualifications and exceptions. Unfortunately, most of what parents and teachers encounter is the brief (often glib) exposition. These expositions leave most thoughtful parents and teachers wondering why *they* can't seem to apply these theories. The reason is, theory is rarely explained well in these expositions which are then too quick to prescribe what *should* be done.

Mr. Favaro says "readiness implies that a child will learn a concept, behavior, or skill, only when he is developmentally prepared and not before." Why not just say—a child is ready when he is ready. Mr. Favaro points out that children, for all intents and purposes, can be quite identical and yet not be able to do identical things. In these cases, we can (according to Mr. Favaro) plausibly conclude that the children are developmentally different. But how does that help us? How does the word "developmentally" add anything more than simply asserting that children are just different? Is it meant to suggest we must teach only things that children are already doing? More to the point, does "developmentally" help us better understand these differences?

Mr. Favaro sets up "developmental categories" based upon Piagetian theory. For each category he suggests specific ways to use the computer with children. The format of a letter to the editor precludes a point by point critique of these suggestions. It is, however, interesting to note that while stages are described in lightning-like fashion the only guidance we are given is age ranges for the various stages. Preoperational children are found from 2 to 7; concrete operational from 7 to 11, etc. What happened to those two chronologically and experientially "identical" children who were so "developmentally" different?

Piaget, while the pre-eminent cognitive developmentalist, is not the last word on many questions about thinking and learning. Piaget's tasks represent only a sample of children's cognitive abilities. Using age spans and stage labels to pigeonhole children and select appropriate learning for them is not a useful aspect of a theoretical framework for parents and teachers.

A more careful application of Piagetian theory to education leads one to conclude that developmental readiness must be assessed in terms of particular children and particular learning. To be learned effectively, material cannot be so novel that children lack concepts to which the new material can be related. If we succeed in making material meaningful to children they will learn. Piaget helps us understand the progression of operations a child uses to construct knowledge. Understanding this progression can help us design appropriate instructional strategies to give children appropriate experiences and data. Determining what children *can* learn about computers requires thinking about what we want them to know, what they presently know, and how (or if) we can help them meaningfully relate these two.

This entire discussion begs the question of what children *should* learn about computers. An answer here will depend on analyses of our values, of what knowledge is bound up in this area we call "computers," and what (if anything) we must give up to make room for computers on our agenda for children. I only hope we avoid Mr. Favaro's suggestions that computers become electric crib toys for sensorimotor children, drill and practice aids for the preoperational, a calculator for concrete operations, and only finally a computer. Instead, perhaps we will be able to explore the computer as a tool or environment for sharpening thinking and problem solving skills.

Alan N. Rudnitsky
Associate Professor
Education and Child Study
Smith College
Northampton, MA 01063

ELAN™* From TECMAR

The Most Powerful Local Area Network for the IBM PC

- Networking using Ethernet protocol
- Telephone support — autodial/autoanswer modem
- Voice recognition of commands and voice response
- Voice mail and messages
- Dictating system using Pearlcorder X-02 or XR from any telephone in the U.S.
- Complete software for written/voice mail, time management and audio/visual clock, calendar, and calculator functions
- Three ELAN Systems; the Secretary, the Manager and the Executive

The Manager

The MANAGER system adds a modem for telephone data communications and by adding a separate handset, will permit voice communications. The modem enables the MANAGER to receive unattended voice and data from any telephone in the U.S. Also, the MANAGER can accept commands through decoding the tones from the telephone keypad.

The Executive

The EXECUTIVE is the most complete implementation of ELAN, adding computer recognition of spoken commands. An executive might phone the PC to leave or retrieve messages or request specific information. The PC, in a spoken voice, can request a user's access code or prompt the user for a command. The executive can respond either by pushing buttons on the telephone, or by actually speaking back to the computer.

The SECRETARY is the basic ELAN system. It includes an Ethernet interface and all other ELAN features except modem and voice recognition.

Whether you choose the EXECUTIVE, MANAGER or SECRETARY, an ELAN system will improve your productivity and expand the versatility of your IBM PC.

The Secretary

ELAN is designed to meet your total communications needs, including computer-to-computer (i.e., networking), person-to-computer, and person-to-person communication requirements for data and voice. The industry-standard high speed Ethernet network protocol is employed in ELAN, permitting many IBM Personal Computers to be linked together by ordinary thin coaxial cable. In addition to his own computer, an ELAN system user can access the other devices attached to the cable — such as printers and large disks.

All versions of ELAN include an Ethernet interface with equipment to convert voice into data and back again. This enables the user to give and receive spoken messages from any location as well as store them for later use. In addition, with the Executive version, all ELAN software packages can be operated through verbal commands, through the telephone keypad or through the IBM PC keyboard. The computer can then respond verbally, either by telephone or 'in person'.

*ELAN (Extended Local Area Network) formerly ComNet

TECMAR 6225 Cochran Road, Cleveland, Ohio 44139, Phone (216) 349-0600, Telex 466692

CIRCLE 253 ON READER SERVICE CARD

Sort Retort

Dear Editor:

I read with interest Howard Kaplon's article "A Comparison of Sorts, Revisited" in the May 1983 issue. The discussion is incomplete since speed of execution and list size are the only variables discussed. One is left with the impression that bubble type sorts are useless except on small lists or as modules in other algorithms.

This is true if all you ever intend to sort is lists of random numbers. If however, multikeyed records are sorted on a primary key and many records which have the same primary key are ordered on a secondary key bubble sort is stable. Algorithms such as quicksort, shell, and heap sort which make exchanges between nonadjacent elements will destroy this secondary ordering. Therefore if sort stability is important these sorts should not be used.

Speed and stability can be bought with space. The two-way merge sort, which is of order N In(N), preserves secondary ordering, but requires an additional scratch array. This algorithm treats a file as N files of length 1. Adjacent files are merged into N/2 files of length 2. This process continues back and forth between the original space and scratch space until there is one file of length N.

In conclusion; speed and size are not the only important issues in comparing sorting algorithms. Stability and memory may also be important depending on the application.

Ellis Workman
120 NW 37th Ave.
Rochester, MN 55901

Eyes Have It

Dear Editor:

I was quite pleased with the review of the Eye security / home control system done by Otto Moyen-van Slimming in your August issue. However, I would like to point out some product improvements that have been instituted since the review unit was purchased.

First The Eye may now be placed in any free Apple slot (except zero). Also, the BSR controller "beep" is an intentional feature; it is helpful to transmit the code several times to insure that "line noise" does not cause erratic operation of the BSR system.

Another very useful BSR feature is the addition of a second on-off cycle for the BSR scheduler. The timer may be activated using either or both of the schedules, and may be programmed by day-of-week to automatically select the proper schedule(s) on the proper day.

As a final note, the capacitance value for the RC filter should be in the range of .1 mfd to 1 mfd, instead of the misprinted .01 mfd spec in the manual. This has been corrected.

I hope that these clarifications will aid your readers. Thank you for a well done, thorough review of our product.

Joseph R. Fuller
President
Lehigh Valley Computer Corp.
Corporate Headquarters
523 South Clewell St.
Bethlehem, PA 18015

Saving Interface

Dear Editor:

The article by Nancy Blumenstalk Mingus ("A Letter Quality Alternative for Atari Users") in the June issue of *Creative Computing* was very accurate. But one important fact was missing.

She does not mention the use of the MEM.SAV file with the Atari 850 interface. The disk you are working with *must* have a MEM.SAV file on it or you will lose the handler if you call up DOS. The interface boots just the same as the disk drive. The interface handler is put into the same memory location that is used by DOS. The MEM.SAV file is needed to save the handler and replace it when the DOS is finished.

I found this out the hard way about four months ago when trying to connect a TI Silent 700 series printer to my Atari 800. The TI 700 series RS-232C has a line Data Carrier Detect which *must* be tied to +12 volts or the printer will not see the data coming from the interface module.

I hope this information will save some of your readers the grief I went through to uncover this.

Ray Holich
1601 Willow Lane
Mount Prospect, IL 60056

Stop the World

Dear Editor:

Several readers have pointed out errors in the World Builder program (June 1983), and one question has been asked several times. I'm writing to answer the question and to advise others of the corrections in the program.

Many readers have asked about the square bracket in a mathematical expression. Some Radio Shack printers print this instead of a carat or an up arrow. This is the arithmetic exponentiation sign. Thus 2[3=8.

In line 520 the formula should be P = (1.25 - L[.285714) / MS /.005

The original expression can give negative percents of stellar life for certain stars.

In line 590 the formula should be L = EXP(4.4228 - .9195 * M) The original formula was in error because I changed from base 10 to base e. The resulting errors weren't obvious since they were still the right order of magnitude.

I have been persuaded to change the lower temperature limit for human habitability. In line 2060 the expression LL <-30 requires a lowest low temperature of -30 degrees F. The coldest continuously inhabited spot on Earth gets down to -60 degrees. I couldn't live there but somebody does. Thus the expression in line 2060 should be LL <-60.

I am very pleased by the amount of comment this program has generated. I've just completed work on an improved version. It contains some 89 stars, built-in data tables on the Solar System and more extensive alien life form and psychology speculations. The new program also does a printout of the information. Contact me if you are interested in obtaining a copy.

Stephen Kimmel
4756 S. Irvington Pl.
Tulsa, OK 74135

BUY A BANANA.™ SAVE A BUNCH.

Meet the Banana,™ the very tough, versatile, portable, and reliable dot-matrix printer from Gorilla.™

At $249.95 retail it's an ideal and inexpensive companion for personal computers like Apple® (or Apple™ look alikes™ such as Franklin® or Albert®), TI,® Commodore,® TRS-80,® Kaypro,® Timex,® Osborne,® etc.

After that, it's merely comparable to other printers that can cost up to three times as much: 10″ carriages (to handle standard 9½″ paper), 80 columns, graphics capability, 10 characters per inch (expandable to 5 cpi) draft-quality print (for perfectly acceptable form letters, data processing, business reports, etc.) tractor feed (for precise alignment and quick loading), parallel or serial interface (take your pick), self-inking ribbon cassette (for long life and easy installation), 10 portable pounds in weight, and compatibility with so many of the most popular personal computers on the market.

Plus its printhead features a unique single-hammer design that eliminates a lot of moving parts, to eliminate a lot of annoying repairs.

That's the Banana: silly name, serious service. It's everything the expensive dot-matrix printers are . . .

Except expensive.

CIRCLE 188 ON READER SERVICE CARD

Leading Edge Products, Inc., 225 Turnpike Street, Canton, Massachusetts 02021
Toll-free: 1-800-343-6833; In Massachusetts (617) 828-8150. Telex 951-624.

Where There's Swill There's No Way

Dear Editor:

Judging from John J. Anderson's "Outpost: Atari" (July, 1983), one would get the impression that graphics are the be-all and end-all of educational software. He talks of all the "amateurish swill" in the educational software market. Then he cites a game software house as the model for educational software producers.

While graphics can be an important element in an educational software package, this overemphasis by Mr. Anderson and others in the computer industry is having some unfortunate effects on the kind of educational software now being developed by the more entertainment-oriented publishers. This graphics-is-everything philosophy is producing the kind of software that I call Fluffware.

Fluffware is a supposedly educational program with little actual educational content, but very strong computer graphics. In some cases, the graphics (which are always crude by print media standards) are not even recognizable by the children they are designed for. Rather, the graphics serve to lure the parents to get them to buy the products. In the short run, Fluffware may force some of the more content-based education off the store shelves.

Our company's position is that computer graphics are never to be used as an end in themselves, but only if they actually enhance the learning process. We start with the educational objectives and then come up with techniques that reach those objectives (including voice accompaniment, workbooks, etc). We try to avoid using the graphics-oriented arcade game as a model for educational software (although if the situation calls for it, we will use it). Rather, we use an interactive audio-visual instruction model. I believe that maturity in the industry will show this to be the correct approach.

John Victor
President
Program Design Inc.
95 East Putnam Ave.
Greenwich, CT 06830

If I gave the impression that all software lacking great graphics is amateurish swill, I sincerely apologize. How I may have come to express that sentiment is a mystery to me, since I could not feel more differently.

What I tried to communicate is a profound disappointment with a few packages on the market today that use the word "education" to mask an inferior product. This does not mean inferior graphics; it means poorly-written and executed programs. It means unhappy and dissatisfied users. It means a continued lack of credibility for the very notion of microcomputers in education.

I wish Mr. Vector and other houses the greatest *success in creating good educational software, with or without graphics and sound. I only hope for reasonable standards of quality.*
—JJA

Righting Writers

Dear Editor:

You concluded the "Dateline: Tomorrow" feature in the July 1983 *Creative Computing* with the taunt, "Perhaps it is time to reinstate our Effective Writing column again. Any opinions out there?" This is one reader who hopes that you are serious.

One of my personal gripes about many programmers is that they tend to be poor writers. I have frequently used segments from Effective Writing when teaching my high school English classes and adult education computer awareness classes. For two reasons I would like to see the column appear once again as a regular feature:

• Computer usage has influenced our language considerably, and I expect that we have just begun to see the extent to which liberties will be taken with our language to accommodate the "computer's need." While those of us who have bothered to understand this phenomenon know the reasons for much of the altering, the majority of the populace do not. If substandard grammar, diction and sentence logic are presented "through the computer," it seems as though we just provide more reason to resist the computer's influence. Please reinstate the Effective Writing column to help programmers see how to write succinctly and with clarity.

• The second reason why I would like to see the Effective Writing column reinstated is that it enhances the quality of your magazine. Several teaching colleagues who have resisted the personal computer's influence have been very impressed with the column. Their opinion of computers and related activities has been visibly enhanced with such a source of quality writing. Please bring back Effective Writing to guide the industry in general and *Creative Computing* in specific.

I thank you for considering these opinions. While I know that a column on gaming or graphics may well sell more copies of *Creative Computing*, this reader will be more likely to stay with *Creative Computing* because it leads other publications in providing me the quality and kind of information which helps me most.

Michael R. Huston
P.O. Box 213
Burdett, NY 14818

Brainstorm

Dear Editor:

When I was in England recently I purchased a Jupiter Ace computer and tested it thoroughly.

There was a serious omission in your review (July 1983). Forth does not ordinarily support floating-point owing to the firm belief of Charlie Moore that everything can be handled in integer, if one takes sufficient pains with the scaling. This is the hard way. For scientific calculations, floating-point is essential.

The Jupiter Ace provides floating-point multiply and divide, which is entirely sufficient—to check it out I wrote a Forth definition (word) for FSIN(x), everywhere good to five significant figures. The Ace suppresses spurious accuracy and displays only digits having meaning—my Basic shows 16 digits for SIN(x) of which at least the last eight are meaningless.

I found the Ace to be quite solid and had no trouble with the cassette interface. In the beginning, Forth is a hard task-master; it is only for people who are willing to test the code they have written to make absolutely sure it is perfect. Forth may be a strict discipline, but there is much satisfaction in having full control, and it pays a substantial dividend in efficiency. This is a great machine for the smartest of the high-school youngsters—for whom it was intended.

Alfred E. Brain
P.O. Box 96
El Granada, CA 94018

To err is human. To forgive is SAVVY.™

With SAVVY™ you can misspell, mistype or rephrase and still command your computer.

If you're tired of inflexible personal software, it's time to get SAVVY.

SAVVY teaches your computer to adapt to you. It's part hardware, part software, and part remarkable. It lets your computer see things as you see them. Do things the way you like to do them. It even allows for those unavoidable entry errors that we all sometimes make.

What's the secret? SAVVY can recognize patterns (other software products can only recognize exact duplicates) and you can teach it to recognize your language. That means it will carry out your commands instead of flashing "error" messages.

Whether you want SAVVY to teach yourself programming, to run your business applications or to develop drills for students, there's a version of SAVVY to suit your needs and your budget. It's a database system, file manager, natural language programmer, and an operating system, all in one. SAVVY operates on Apple II Plus® and IIe® computers as well as Apple-compatibles.

Call 800-551-5199 to arrange for a demonstration at your local dealer.

SAVVY is a product of Excalibur Technologies Corporation, 800 Rio Grande Boulevard N.W., Mercado 21, Albuquerque, New Mexico 87104.

SAVVY

A product of **Excalibur** TECHNOLOGIES CORPORATION

SAVVY™ is a trademark of Excalibur Technologies Corp. Apple II Plus & IIe are registered trademarks of Apple Computer Inc.

CIRCLE 156 ON READER SERVICE CARD

In Love With Lisa

Melvin Merkin

It was a hot summer morning when I first met her. We played all day and I knew then I must have her for my own. My dream came true last month when she moved in with me and we spent four beautiful weeks together. Now she is gone, but I must tell you about Lisa.

Hardware

Lisa is the name of a new computer from Apple Computer. Lisa has been in the press enough since she was first announced last January that I would be surprised if you had not heard of her. I had the privilege of using Lisa for a four week beta test period recently and thought enough of this new computer to put my thoughts to pen. Table 1 lists the vital statistics for all the hardware freaks, but, the numbers don't even hint at the essence of Lisa.

Motorola 68000 CPU
1 Megabyte of RAM
2 871K disk drives
5 Megabyte hard disk with cable
1 Keyboard
High resolution video screen (720 × 364 pixel black on white)
1 Mouse (a pointing device)
2 Serial ports with full duplex channels
1 Parallel port
3 Expansion slots

Table 1. The Hardware.

This hardware together with six software packages (*LisaDraw, LisaWrite, LisaCalc, LisaGraph, LisaList,* and *LisaProject*) costs $9995. In addition you get to choose between two printers: a dot matrix printer for $645 or a daisywheel printer for $2165.

The dot matrix printer needs a $195 parallel interface card since the hard disk uses the parallel port that comes with the machine. The daisywheel printer hooks right into one of the serial ports. The dot matrix printer is better for pictures and the daisywheel is better for words, although they both can print pictures and words.

I bet you're thinking that, "That's a lot of money!" Well, you're right. Lisa is definitely the top of the line in microcomputers. Please keep in mind, however, that the price includes possibly all the memory and all the software you will ever need. Now, you have an easy decision to make: dot matrix or daisywheel printer. My guess is that the decisions will get harder as Lisa matures and more options become available.

Software

"What's so exciting about Lisa then?" you may ask. Although the hardware collection is very powerful, it includes nothing that isn't found in the Xerox Star. The exciting thing about Lisa is the software which comes with it and the way it has been woven into the fabric of the hardware design. It is as if the designers started with the concept of what a computer should do and how it should interface with the user, and worked backward to the hardware design.

Melvin Merkin, 55 Sutter, #361, San Francisco, CA 94104.

THE BEST REASON FOR HAVING A HOME COMPUTER.

Your children. That's why we created the Early Games series for them. We're educators as well as computer specialists. We create games that teach children important skills.

There are five programs in the Early Games series. **Early Games for Young Children** is a set of nine entertaining activities for children 2½ to 6. They can work with numbers and letters and create colorful pictures. **Matchmaker** uses shapes, sizes, directions and colors to help children develop reading readiness skills. Children ages 5 to 12 can learn to play melodies with Early Games **Music.** Our **Piece of Cake** turns math problems into, well, a piece of cake. And **Fraction Factory** takes the work out of fractions.

Early Games feature multiple activities, easy to use picture menus, and colorful graphics. The games are fun, children love to play them! That's why they learn from them.

And they're the best reason for having a home computer.

CSI

counterpoint software inc.

Turning Lisa on, for example, doesn't just bring power to the electronics, but invokes a whole series of checks to make sure everything is working properly, initiates a configuration suited to your tastes, and initializes the system to the exact point in the last program you were using when you turned the system off.

The *piece de resistance* is the mouse. Even though the mouse was not invented by Apple, Lisa will surely popularize it. What is remarkable is the way in which a person using the Lisa mouse can quickly and effortlessly glide through complex conversations with the machine in a most natural way. The mouse is used to point to pictures (or icons) on the screen, and the button is used to either select or grab a picture. These two primitive primate functions of select and grab are used throughout all six software packages.

Three-dimensional figures are produced with delightful ease.

The designers of Lisa have built a machine that is not only easy to use but easy to put together. You don't even need a screwdriver as all the components slide together and snap in place. This makes for easy repair and maintenance. It is no exaggeration to say that Lisa can be unpacked and working within 10 minutes.

Once it is up and running, you will be tempted to start playing with Lisa instead of dutifully going through the interactive tutorial called LisaGuide. A friend of mine was having some difficulty using *LisaCalc*. When I suggested he look in the LisaCalc Reference Manual he said, "That's cheating." Learning how to use Lisa by trial and error is so much fun that to learn it methodically by going through the tutorials provided for each software package seems insipid.

Lisa Draw

This review would be hundreds of pages long if I were to discuss each of the six software packages in detail. Fortunately, I became so engrossed in *LisaDraw* that I gave short shrift to the other five software packages. I had never before seen anything like it.

LisaDraw allowed me to combine the flair of an artist with the skill of a draftsman in creating illustrations for my reports. For me this was an entirely new form of expression which greatly enhanced my ability to communicate my ideas. I am neither an artist nor a draftsman yet I have always wanted to draw my ideas. With *LisaDraw* I can now do this.

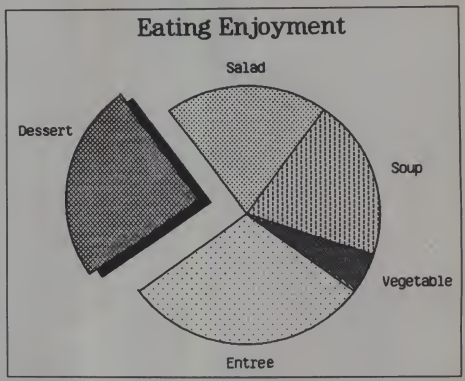

Exploded Pie Chart.

In seconds I can throw a circle up on the screen and fill it with tiny hearts. Three-dimensional figures are produced with delightful ease. I had fun drawing my signature then shrinking it and moving it on top of the circle filled with tiny hearts. Can you imagine: a $10,000 doodle pad!

When all of my pent up creative juices subsided I got down to the very serious business of drawing the illustrations for my reports. Figure 1, shows a rather bland example of the type of illustration possible with *LisaDraw*. Anyone submitting patent illustrations would find *LisaDraw* indispensable. The program is the forerunner of personal CAD (Computer Aided Design) systems. What is so spectacular about Lisa is the ability to take an illustration done in *LisaDraw* and paste it into a report prepared in *LisaWrite*.

LisaWrite

LisaWrite is the word processor that comes with Lisa. This is no ordinary word processor but a little typesetting machine. Not only can I choose from a variety of fonts to type in, I can also select the size of my letters, shading, underlining, boldface, italics, etc. After typing the document I can go back and enlarge a word in the middle of the page. Instantly all the words will shift around the page adjusting for the increased length and width of the enlarged word.

I can type on a blank sheet of paper or call up a selection of typing accouterments such as a grid for lining up columns, or a ruler (in inches or centimeters) which shows the margins. The mouse is used to highlight portions of the text for deletion, modification or moving.

At any time I can interrupt my word processing, temporarily put it aside and jump into another application. This is all part of the operating system called Desktop Manager.

LisaCalc is a spreadsheet program in the traditional sense.

LisaCalc

LisaCalc is a spreadsheet program in the traditional sense. The mouse can be used to jump quickly around the spreadsheet and to stretch or compress individual columns. Using the mouse, you can point to a cell, push the button to select the cell, and then move the mouse while holding the button down to highlight a block of cells.

Lisa uses a noun-verb syntax. After highlighting a cell, row, column or block

IS THIS LEVEL OF RELIABILITY REALLY NECESSARY?

ACCUTRACK

If you've ever lost data due to a faulty disk, you know how important reliability can be.

That's why Accutrack disks are critically certified at 2-3 times the error threshold of your system. Why they're precision fabricated for higher signal quality, longer life and less head wear. And why we take such extra steps as testing single-density mini disks at double-density levels. So you don't have to worry about the reliability of your media.

Accutrack disks. OEMs have specified them for years. You can trust them for your data. Call toll-free (800 225-8715) for your nearest dealer.

ACCUTRACK
Dennison KYBE Corporation
82 Calvary Street, Waltham, Mass. 02254
Tel. (617) 899-0012. Telex 94-0179
Outside Mass. call toll free (800) 225-8715
Offices & representatives worldwide

Dealers: Give your customers a choice—Accutrack's OEM performance as well as your heavily advertised brand. We have the industry's only complete line of disks, cassettes and mag cards, including virtually all special formats. If you want a quality line, small minimums, the ability to mix and match, private labeling, fast delivery and great price, call today. Find out how responsive a media supplier can be.

CIRCLE 198 ON READER SERVICE CARD



Lisa's Innovative Disk Drive.

(indicating the noun), you tell Lisa what to do (verb) with the highlighted portion. Typically, after composing a nice little financial model in *LisaCalc* you would move a portion of the spreadsheet into *LisaGraph*.

LisaGraph

LisaGraph is a program which produces business graphs from columns of data. The screen is split vertically into columns of data on the left and a graph of the data on the right. Using the mouse, you can easily choose among several views of the data, including pie chart, bar graph, and line plot. If you choose a bar graph representation, you can then choose hidden bars, stacked bars, or side-by-side bars. As you make different selections, the graph on the right of the screen changes instantly.

You can go to the data side of the screen and modify the numbers. This also causes the graph to change before your eyes. The graph will have a title, subtitle, and labels, but you may wish to move the graph to *LisaDraw* where you can add annotation and further illustrations.

The graph will be moved over in an intelligent fashion. For example, after you move the pie chart over, you can "grab" a slice of the pie and drag it partially out of the pie. *LisaDraw* will "know" that the graph is made up of several components which can be individually addressed and modified.

LisaList is a very simple and easy-to-use database system.

LisaList

LisaList is a very simple and easy-to-use database system. Actually, it is too simple to be given the name of database manager and is appropriately named *LisaList* since it operates on lists of records in which each record is composed of many fields. The fields are represented as columns and the records are represented as rows on the screen.

The two basic operations are sorting and selection using a variety of criteria. *LisaList* is certainly easy to use. However, it is unable to perform sophisticated database management functions and, in my mind, is the weakest of the six programs in the package.

LisaProject

I have saved perhaps the best for last. *LisaProject* is a beautiful application. If you are a project manager and have tried to use a computer to help you manage your project you will appreciate *LisaProject*.

LisaProject allows you to work directly on a PERT chart. The critical path is highlighted at all times. You can add new milestones or processes, and the chart is instantly updated. Adding or deleting dependencies is easier than using a pencil and eraser on paper. The bigger your project the more you need *LisaProject*.

It is clear that *LisaProject* was written for the Lisa project herself. You can spend many times the cost of the full Lisa system on a mainframe project management system written for 80-column punch cards. If you are in charge of a large project, run, don't walk, to your nearest Apple dealer and try *LisaProject*.

Drawbacks

Nobody's perfect, not even Lisa. I have a list of complaints which bear airing. First and foremost, Lisa is slow. The actual calculation speed is fast enough to make you believe there is a 68000 under the hood, however, the user-friendly system really eats up machine cycles. It seemed as though it took Lisa a full five minutes just to turn herself on and check herself out. I got in the habit of simply leaving Lisa on all the time. I lost my guilt when I found out that one of the designers of Lisa had his on for six months straight and suffered no ill-effects.

The screen automatically dims after a few minutes of idleness. Just touching the mouse or keyboard will bring the screen back to life.

Switching from one application to another seems to drag on forever (about two minutes). Once you are in an application though, Lisa moves along briskly. Especially frisky is the speed at which pictures are drawn on the screen.

Another complaint about the set of six programs is that they all are fixed and cannot be programmed in any sense. For example, in *LisaWrite* there are about ten different fonts, but I couldn't define my own. There is a pre-defined set of characters; I couldn't create the beta character, for example.

In *LisaDraw* there are about 50 tessellation patterns, but darned if I could create my own. I got the feeling that the designers thought they knew what was right for me. Even though the six programs are easy to use and of the finest design, I hope future releases will give the user more control.

LisaDraw was my favorite, and I know I am tempting fate by suggesting an improvement, but I found myself on many occasions wanting to rotate a picture I had drawn. Also, Lisa is a black and white machine. I would love to see a color version.

It is clear that LisaProject was written for the Lisa project herself.

Innovations

Lisa is touted by Apple as a revolution in computer technology. I agree with them. If I had to choose between a multimillion dollar IBM 3083 or a Lisa, I wouldn't hesitate to ask for the Lisa. Microcomputers were catching up to minicomputers a year ago, but have now passed mainframes in many important respects.

The big mainframes aren't used by the average person because they are very difficult to use. They don't have a mouse or the picture drawing speed of the Lisa. I predict that people will soon use microcomputers, and microcomputers will use mainframes.

I think the biggest innovation represented by Lisa is the integration of all the programs—with each other and with the hardware. Other vendors are quickly picking up on this integration theme. It is a very difficult task to accomplish but a worthwhile goal for all future systems. Even if Lisa is not successful (I think it will be), it has set a new standard which will affect all future computer offerings.

The disk drive is another innnovation,

HOT STUFF

You'll find it wherever computergamers go to score the latest and greatest in entertainment software.

The HOT RACK. It's where the "hot" ones are.

You'll find games that'll grab you, thrill you, and hurl you to worlds you never dreamed were possible. Best-sellers like CHOPLIFTER. CASTLE WOLFENSTEIN. AZTEC. STAR-BLAZER... and many, many more.

So, stop wasting your time and money on games that could leave you cold. Look for the HOT RACK at your local computer store.

If you don't see it, ask for it.

Dealer inquiries invited.
Dealers only, call 800 432-3129 (Inside California) or 800 854-6801 (*Outside California*).

Another marketing first from MICRO D.

CIRCLE 211 ON READER SERVICE CARD

Inside Apple

Vol. I, No. 3

Apple's new Monitor II. A sight for sore eyes.

If you've been using a TV as a monitor, perhaps you can get a friend to read this for you:

Apple's brand new Monitor II will improve your vision.

It features all the latest ergonomic improvements in monitor technology.

For example:

Studies have shown that the leading cause of eye fatigue for computer users is lack of contrast between the displayed characters and their background.

So we designed the Monitor II around a high contrast green phosphor CRT that provides an extremely dark background. That means you can read text at a lower brightness. And that means you can be more productive — working longer and more comfortably.

Toward that same end, we also gave Monitor II a tilt screen. So you can angle it perfectly for your working position, without scooting your chair around or sitting on phone books.

And we made that screen antireflective to reduce glare from ambient light.

Monitor II also features a high bandwidth video amplifier and a high tolerance linearity circuit. The former keeps characters from smearing on the screen and eliminates the annoying "ghosts" left by a fast moving cursor. The latter keeps characters crisp, legible and prevents "keystoning" right up to the edges of the display. Both add up to superior display of 80-column text and extremely accurate graphics.

Designed as the perfect system partner for the Apple® IIe Personal Computer, Monitor II requires no monitor stand. It's a perfect fit, aesthetically as well as technically. So it's pleasing to the eye even when it's turned off. See for yourself.

At your local authorized Apple dealer.

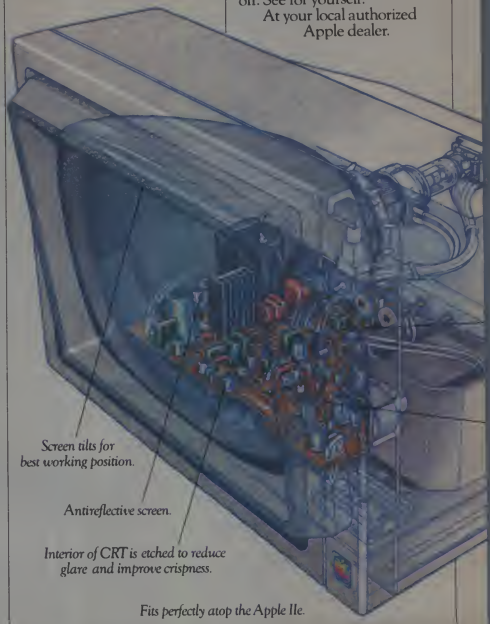
Screen tilts for best working position.
Antireflective screen.
Interior of CRT is etched to reduce glare and improve crispness.
Fits perfectly atop the Apple IIe.

Now Apple plots color.

Since color graphics are becoming ever more important in business, we've been hearing more and more calls for a color plotter as reliable as an Apple.

Here it is:

Apple's new Color Plotter can generate all kinds of presentation graphics, engineering drawings or anything else you have to illustrate in up to eight brilliant colors.

And it can perform its art on any size paper up to 11" x 17". Or, with optional transparency pens, it can draw right on transparent film for overhead projection.

Measuring just 4.8"H x 16"W x 12"D, it's the smallest four-color, wide bed color plotter you can buy — about half the size of conventional flatbed plotters. So it takes up less space on your desk and can easily be moved to someone else's desk.

There are two color plotter accessory kits to choose from to assure a perfect marriage with your Apple II or IIe, or Apple III.

Each kit comes with eight color pens — red, blue, green, black, burnt orange, gold, violet and brown. Plus a starter package of plotter paper. Plus all the manuals, documentation and cables appropriate to your particular kind of Apple. So you can get up and coloring right away.

Apple also offers a complete selection of 24 different pen packages — so you can choose whatever colors you need in a variety of widths for a variety of applications and media types.

As you might expect, all of the above is available at many of our authorized Apple dealers.



Carry on with AppleCare™ Carry-In Service.

No matter how long you've owned your Apple system, you can now get a long term service contract at a very reasonable cost.

AppleCare Carry-In Service is a service plan that will cover most Apple-branded components in your system for one full year.

It covers an unlimited number of repairs and is honored by over 1500 authorized Apple dealers nationwide.

Apple-trained technicians assure you of the highest quality service, fast — in most cases less than 24 hours.

AppleCare Carry-In Service is ideal for anyone who needs to know ahead of time the cost of maintenance for their system.

So check out the details — you'll find it's the lowest cost health plan an Apple can have.

Apple Computer Inc. 20525 Mariani Ave., Cupertino, Calif. 95014 *For the authorized dealer nearest you, call* (800) 538-9696. © 1983 Apple Computer Inc.

AppleCare is a service mark of Apple Computer Inc.

CIRCLE 114 ON READER SERVICE CARD

albeit of lesser importance. Apple has redesigned the disk drive to hold more data and to be more fault tolerant. The sector sizes are all uniform in contrast with the standard design in which the ones on the perimeter are wider than those near the center. To accomplish this feat, the designers have the diskette rotate at a variable speed depending upon the distance of the read head from the center. Instead of a constant hum you hear a little tune whenever the disk drives are reading and writing.

The other important difference is that the two read/write heads are 180 degrees apart instead of being together. This means that the diskettes need two oblong holes in the jacket instead of one. This change means that the diskettes will last longer and be less prone to errors. However, I feel it was a mistake to create a non-standard design especially in light of the new 3" diskettes becoming popular.

Other innovations include the one-button mouse. Mice previously have had two to four buttons. It was quite a stroke of genius to come out with a mouse with only one button. The one button makes things much easier to use since, when in doubt people will simply pass the one button and see what happens. With two or more buttons the user might hesitate to press a button for fear of pressing the wrong one. Lisa cheats a little on the elegance of the one button design by allowing shortcuts like clicking the button twice in rapid succession for "advanced" commands.

Lisa has many tricks up her sleeve. One of the features announced is the inclusion of a serial number and a unique random number built into the ROM. These two little numbers will allow total and absolute copy protection on future software. Also by checking the serial number, a program could adjust to past hardware modifications. Apple could reserve a whole sequence of serial numbers for a large company and then sell software which works only for that set of machines. The unique random number will undoubtedly be used for security to protect the Lisa owner, say, in home banking applications.

I used the first release of Lisa. Lisa is sure to grow. I suspect that Lisa will really shine when she adds AppleNet to her repertoire, allowing her to talk to other Lisas as well as Ethernet.

Apple has always encouraged third party software, and I see no reason for them to change their strategy. Apple will be offering tools to software developers allowing them to have their programs make use of the mouse and draw pictures on the screen. More important, these tools will allow third party vendors to develop applications which will integrate with the six LisaSeries programs as well as with any other applications using the prescribed methodologies.

Can I recommend Lisa for you? No, I can recommend only that you go to your nearest Apple dealer and try Lisa, because no amount of explanation can describe her. Like love, Lisa must be experienced. □

"Until I see this Supreme Court ruling, Bobby, I'm afraid I can't condone throwing Lisa Nichols into a volcano."

OMEGA Ω INTERNATIONAL



EPSON FX-80 PRINTER

- Up To 160 cps • Pinfeed Platen
- Proportional Spacing • Graphics • Elite Pitch
- Centronics Parallel Interface • Internal 2 K Ram

NOW AVAILABLE FOR IMMEDIATE DELIVERY !

IDS 480 MICROPRISM

OMEGA PRICE **$499**

Manufacturers Suggested Retail Price 699.00

- New "Maisey™" Print Quality
- Dot Matrix

CALL TOLL FREE !
1-800-343-0873
Call Toll Free for Ordering
All Others call (617) 229-6464

CHARGE IT ! VISA MasterCard

- Mass. Residents Add 5% Sales Tax
- Prices Do Not Include Shipping Charges

PRICES, SPECIFICATIONS AND AVAILABILITY OF ADVERTISED MERCHANDISE SUBJECT TO CHANGE WITHOUT NOTICE

UNADVERTISED SPECIALS • AMDEK • APPLE • C-ITOH • GEMINI • NEC • OKIDATA • TANDON

OMEGA INTERNATIONAL
334 R CAMBRIDGE STREET, BURLINGTON, MA. 01803

Introducing a new high in computer skill games

Think balancing a pile of blocks is kid's stuff? Think again. Building a stable tower in this game takes muscle, a keen eye and a good bit of planning. Barnaby, Highrise's master builder, supplies the muscle. But it's up to you to select blocks of various shapes and sizes from any of five chutes. Then load 'em onto the springboard in any of five positions and flip 'em up onto the pile. Plan your block selection and placement correctly and you build a balanced pile. Stack 'em wrong and your pile comes crashing down. Each block you add racks up more points. Complete a pile and Barnaby climbs up and takes you to the next level of difficulty. But hurry—you're piling blocks in a race against the clock. Highrise. It's a new high in computer skill games. Recommended only for players with a keen eye, an agile mind and very steady nerves.

Available for Apple II™ and IIe,™ IBM PC,™ Commodore 64™ and Atari 800™

micro learn™

THE COMPUTER EDUCATION DIVISION OF MICROLAB, INC.

Highrise™ is a registered trademark of MicroLab, Inc.
Micro Lab 1983. MicroLearn is a registered trademark of MicroLab, Inc.
MicroLab, Inc., 2699 Skokie Valley Road, Highland Park, IL 60035, 312/433-7550

CIRCLE 186 ON READER SERVICE CARD

HOW TO UNSCR YOUR NEST

It doesn't take a computer to tell you that money can't buy you happiness.

But at last there is a piece of personal computer software that can make you a lot happier about your money.

And you're looking at it.

Who needs it?

Dollars and Sense™ is designed for everyone who wonders where their money is going. Or why it isn't going as far as it used to. Or even as far as it's supposed to.

It's designed for people on a budget. And for people who aren't.

It's designed for people with expense accounts. And people who just want to account for their expenses.

For people who don't know a thing about computers. And people who know everything.

For people who can't balance a checkbook. And people who can do it in their sleep.

And if you've read this far, it's designed for you.

Where have all the dollars gone?

Dollars and Sense saves you money by organizing your money. By giving you the clearest picture you've ever had of your financial behavior.

You can establish budgets along any lines you like. Monthly or annually. Fixed or variable. On up to 120 accounts.

It can write checks, make transactions automatically, even remind you to pay your bills.

And as time goes by, it tells you exactly how you're doing. With a complete set of reports and full-color graphs.

Year-to-date summaries. Income statements. Balance sheets. Cash flow analyses. Monthly and yearly comparisons of where you wanted to be vs. where you are.

You can look into the future to discover how much damage that new car, new driver, new dress or new baby will do to your budget.

Or look into the past to find out anything you like. Like how many bar

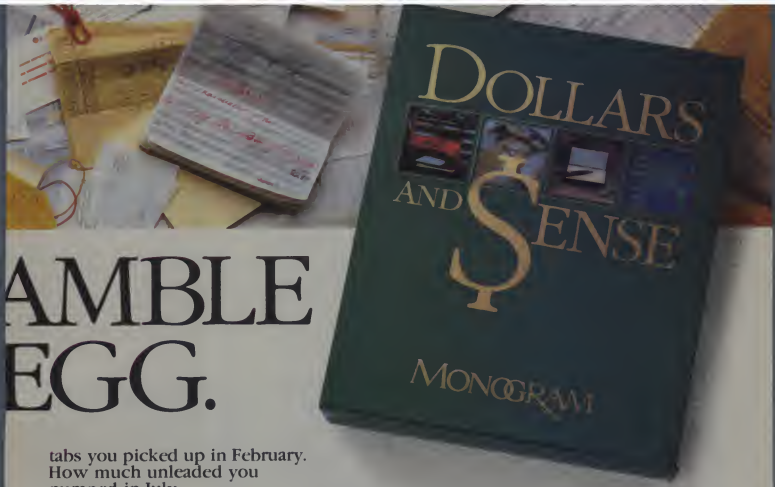

AMBLE EGG.

tabs you picked up in February. How much unleaded you pumped in July.

Or whether your utility bills have gone far enough through the ceiling to justify a new roof.

And all you have to do is spend a few minutes each week telling your IBM® PC, Apple® II or IIe what came in and what went out.

Tax break.

You can use Dollars and Sense around the house or around the office.

And around April 15, you'll be glad you did. Because a few simple keystrokes will present you with all the information you need to satisfy Uncle Sam.

If you do your own Long Forms—or your own loan applications—you'll save time. If someone else does them for you, you'll save money.

Year after year.

User friendly. Really.

Dollars and Sense also happens to be very easy to use. For everyone who uses it.

If you're a novice, at computing or accounting or both, don't worry.

The interactive demonstration disk will get you started. And the program will keep you going. With sample accounts, on-screen prompts and two different beeps.

One for typographical errors. And another for other kinds of errors.

As you get faster, so does Dollars and Sense. You can enter and edit large amounts of information, right on the screen. Move from function to function without waiting around. And get instant, up-to-date reports.

On screen. Or on paper.

And one more thing. Dollars and Sense is tax-deductible.

But only if you use it on your taxes.

MONOGRAM

8295 South La Cienega Blvd.
Inglewood, CA 90301
213/215-0529

Apple is a registered trademark of Apple, Inc
IBM is a trademark of International Business Machines
*Color monitor required

CIRCLE 265 ON READER SERVICE CARD

TRS-80 Model 4

More Business Oriented Than The III

Stephen B. Gray

Radio Shack's new 8-bit computer, the TRS-80 Model 4 replaces the Model III and is compatible with not just one, but with two operating systems, TRSDOS 6.0 and CP/M Plus. (It is also compatible with TRSDOS 1.3 and LDOS, but more about that later.)

Thus the user can run all the programs written for the Model III, and also the more than 3000 programs written under CP/M.

On The Outside

From the outside, the Model 4 looks very much like the Model III, except that more of the control keys are white; there are some additional keys; the case is a different color; and the display holds more characters.

The Model III case was made of an opaque plastic sprayed with an aluminum-color paint that rubbed off all too easily. The cream color of the Model 4 case is molded in and is therefore permanent.

The additional keys are CTRL, CAPS, and the three function keys in the numeric keypad, F1, F2, and F3. CAPS locks the display into either upper- or lowercase and affects only the alphabetic keys. CTRL, used with other keys, provides a set of control commands in the same way the SHIFT and CLEAR keys do. For example, reverse video, which puts white characters on a black background, is enabled by CTRL-P.

Display

The display is schizophrenic: run a Model III program and the screen shows 16 lines of 64 characters each. But boot up Model 4 TRSDOS 6.0, and the video shows 24 lines of 80 characters each.

There will be Model 4 software, such as word processing and spreadsheet programs, that uses the 80-column format.

The Model 4 characters are smaller, of course, to fit in the same screen area: they are 10 to the inch horizontally and 4 to the inch vertically, as compared with 8 horizontal and 2.57 vertical characters to the inch on the Model III.

Double-width characters can be displayed, as in the Model III, except that there are 40 to the line.

Graphics Characters

Like the Model III, the Model 4 can display 64 graphics characters, which represent all the combinations of six pixels in a rectangle two across and three down. Twenty-six of the 64 graphics characters can be displayed using combinations of CTRL/CLEAR with alphabet keys. This means graphics can be put directly into strings or PRINT lines when writing programs.

However, only 51 of the 64 graphics characters can be entered from the keyboard using various control keys. So unless you can create your graphics with only those 51, you must use a program that stuffs graphics characters into strings or into PRINT lines.

Stephen B. Gray, 219 W. 81st St., Apt. 7C, New York, NY 10024.

The Enhancer II Proudly Presents

A Whole New Cast of "Key" Characters!

Recognize some of these "key" characters? You've seen them all before on your Apple® II screen, but now the Enhancer II has given them all new identities!

The Enhancer II uniquely gives your Apple II user-definable keys. So you can define any key to become what you want it to be. That means phrases, paragraphs or commands that you use frequently (up to 510 characters!) can be remembered by the Enhancer II and then called up at the touch of a single key.

Besides that, the Enhancer II gives your Apple II typewriter mode, with each key assuming the function of a power tamal recorder. We're not only will you recognize all the characters you'll positively rejoice at having lower and lowercase letters, auto repeat, shift and shift lock again! The Enhancer II also has a type-ahead buffer of 128 characters, so you can keep sending messages to your Apple II even while it's busy with something else.

And if you want to meet even more new characters, the optional Function Strip™ will introduce you to 16 brand-new keys across the top of your keyboard which are yours alone to define. (These characters will never get mixed up with characters from the keyboard!)

We can be prejudiced, but we think you're going to like your new "key" characters from Enhancer II. In fact, we bet that once you've seen them perform, they'll become the stars of your screen.

Suggested retail prices:
Enhancer II, $149
Function Strip, $79
Combined Package, $215

Videx

597 NW Grant • Corvallis, OR 97330
(503) 758-0721

The Enhancer II and Function Strip can be used with any Apple with a keyboard connector board.

Apple and the Apple logo are registered trademarks of Apple Computer, Inc.

CIRCLE 295 ON READER SERVICE CARD

TRS-80 Model 4, continued...

You can't use SET and RESET to turn graphics pixels on and off, or POINT to test for their presence, because Model 4 Disk Basic doesn't have those commands. It has no graphics functions at all, other than CLS, which clears the screen. So if you want to create SET/RESET graphics on the Model 4, you must do it in Model III mode.

To make the Model 4 graphics situation really weird, the bottom two pixels in the six-panel graphics character rectangle are only half as high as the upper four (Figure 1). This makes for some odd-looking, highly unsymmetrical graphics. The short-legged graphics characters are, of course, the result of the increase in numbering rows from 16 to 24; there just isn't room for graphics characters of Model III height.

Display characters, whether letters, numbers, or graphics characters, are created by increasing the brightness of small sections of the horizontal raster-lines.

The graphics area is 6.25" high. In the Model III, those 6.25 inches encompass 200 raster lines. Divide the 200 by the 16 lines of characters, and you theoretically have 12.5 raster lines available for each graphics character. If the graphics characters are made 12 raster lines high and the characters are three pixels high, then each pixel is four raster lines high.

To squeeze 24 lines onto the Model 4 screen, more raster lines per inch are required, so a higher resolution raster display is used, with 250 raster lines in those 6.25 inches. Dividing 250 by 6.25 gives 10.4 raster lines per graphics character. It might have been possible to cut the pixels down to three raster lines in height, and thus produce graphics characters nine raster lines high, which would have been symmetrical, but then they would have looked quite different from Model III graphics.

The designers elected to leave the top two pairs of pixels in the graphics characters at four raster lines in height, and reduce the bottom pair to two raster lines high. Thus the top two-thirds are the same, but the bottom third of all graphics characters is short-legged.

Function Keys

The three function keys aren't described in the Model 4 manuals, but an addendum sheet tells what they do in Model III mode. F1: "pause program execution" (same as SHIFT/@). F2: "leave insert mode and return to normal Edit Mode" (same as SHIFT/up-arrow). F3: "erase last character typed" (same as left-arrow).

The addendum sheet doesn't say that in Model 4 mode, the three function keys can be used with INKEY$, just like any other key. The decimal code for F1 is 129; for F2, 130; and for F3, 131. So you should write:

```
100 A$=INKEY$ : IF A$=CHR$(129)
THEN 180 ELSE 100
180 PRINT "KEY F1" : GOTO 100
```

or something to that effect.

The question is: what do these three function keys do for you that other keys won't? Well, they let you perform those Model III mode operations with one key instead of two. And they can be "reserved for special applications," according to a member of Radio Shack's Model 4 Support Group in Fort Worth, hinting that future programs from Fort Worth will specify the use of the function keys, just as they do on the Model II/12/16.

The questions is: what do these three function keys do for you that other keys won't?

Model 4 Operating Systems

The TRS-80 Model 4 is compatible with several operating systems: TRSDOS 6.0, TRSDOS 1.3, LDOS, and CP/M Plus. This may sound complicated, but it really isn't: the first three have a close family relationship.

Radio Shack's first disk operating system, TRSDOS for the Model I, was written by Bill Schroeder. He later left Radio Shack and started his own software company, Logical Systems Inc., in Mequon, WI. His company's disk operating system for the TRS-80 is called LDOS, which stands for Logical Disk Operating Systems.

In a recent Logical Systems advertisement, version 5.1 of LDOS for the Model I and III is offered at $129, "reduced from $169."

Now the plot thickens. Look in a recent Radio Shack catalog for the Model I/III hard disk drive, and you will note that it says the "operating system enhances familiar TRSDOS commands with convenient hard disk features." Because TRSDOS didn't have any hard disk commands, Radio Shack found it easier to offer LDOS 5.1.3 for use with the hard disk drive than to create a new TRSDOS in Fort Worth.

Starting with catalog RSC-9, dated 1983, Radio Shack offers (p. 28) the LDOS "advanced operating system that offers the TRS-80 user many features and enhancements that are not included in TRSDOS . . . . Includes a Job Control Language to control an unattended computer, a terminal utility, keyboard type-ahead, printer spooling to memory and/or disk, a printer output formatting program, and device independence—linking, routing, and filtering." Radio Shack's price for LDOS is, of course, $129. There are two versions, one for the Model I, the other for the Model III.

When you turn on the Model 4, the first display says "TRSDOS 6.0.0—Copyright 1983 Logical Systems Inc. . . . Licensed to Tandy Corporation." TRSDOS 6.0 includes a Job Control Language, and is substantially the same as LDOS; they are code compatible. Forty-three commands are common to both LDOS 5.1.3 and TRSDOS 6.0; nine more are found only in TRSDOS 6.0, and 13 others are found only in LDOS 5.1.3.

TRSDOS 1.3 is the operating system used by the Model 4 when in Model III mode.

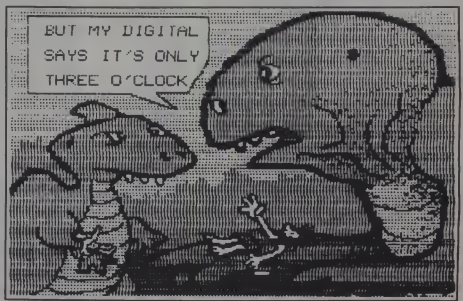

Hayes™

More micro software is written for Hayes than for any other modems!

Because Hayes, the telecomputing leader, continues to lead the way! With popular-selling modems that make telecomputing a breeze for beginners or professionals. And with sophisticated engineering that appeals to software developers.

Send for our free *Communications Software Directory*. It lists more than a hundred software programs written for Hayes modems by independent programmers. For diverse communication functions, from the practical to the fun. But all maximizing the advanced telecomputing capabilities of Hayes modems.

Whether you're collaborating on competitive strategies with offices in the field. Doing your gift shopping via computer. Or collecting and analyzing commodity or stock information. Let Hayes provide the superior communications link!

Mail the coupon today for your free copy of the Hayes Communications Directory. (Or pick one up at your local computer store.)

ADVISOR

Provides a comprehensive portfolio management system for active trader, money manager or investor.

Protects sensitive information sent over telephone lines so that no unauthorized person can decode files.

Permits use of normal telephone lines for accessing international Telex network.

THE FLIGHT PLANNER

Aviation software simplifies planning and increases safety.

Automatically logs-on to networks, answers phone, saves incoming data, and allows it to be stored on disk, edited, and printed.

Transfers files between various micros, minis or mainframes.

Automatically answers phone in your name; receives, delivers messages.



TELE-GAMMON

Allows users to play backgammon with players at distant locations.



NOTE: More and more software is being written for Hayes modems everyday. Please let us know if you would like to have your program included in our next software directory.

CIRCLE 170 ON READER SERVICE CARD

Mail To: Hayes Microcomputer Products, Inc. CC-1
Attention: Marketing Services, 5923 Peachtree Industrial Blvd., Norcross, Georgia 30092.

Name _____

Address _____

City _____ State _____ Zip _____

Please send additional information on:

- ☐ Smartmodem 300* **
- ☐ Smartmodem 1200* **
- ☐ Smartmodem 1200B* (plug-in board for IBM PC)
- ☐ Micromodem IIe* (for Apple computers)

Hayes

*FCC approved in U.S.A.
**DOC approved in Canada
©1983 Hayes Microcomputer Products, Inc.

TRS-80 Model 4, continued...

CP/M Operating System

CP/M stands for Control Program/Microcomputers; it is distributed by Digital Research, Inc., of Pacific Grove, CA. CP/M Plus is a version created for 8088/Z80-based systems.

For a long time, CP/M was the only disk operating system around. It had unique features, such as being, for some time, the only relocatable operating system that could run on computers with memories ranging from 16K to 64K. This and other such features led to its becoming the standard DOS for 8-bit machines. And thus a large amount of software was generated to be run under CP/M.

Back in July 1979, the first item in my TRS-80 column (p. 112) said:

"Radio Shack has officially killed the idea of using CP/M on the TRS-80. There is no suitable way of relocating CP/M from the low end of memory, and CP/M expects I/O vectors at 0 to 100 hex."

That was over four years ago. Since then, many TRS-80 users let it be known that they wanted to be able to use the large library of CP/M programs available. So Radio Shack came up with the Model 4, which is compatible with the two different operating systems, TRSDOS 6.0 and CP/M Plus. CP/M needs 64K to operate in, which is why the Model 4 has a minimum 64K memory.

Curiously, although the Radio Shack catalogs and brochures say that the Model 4 will run under CP/M Plus, there is not a single mention of CP/M in the three manuals supplied with the Model 4.

Job Control Language

JCL does a lot more than just "control an unattended computer." It consists of TRSDOS commands, macros, and special symbols, which you use to create a JCL file, using the BUILD and DO commands, *Scripsit*, or a Basic program.

Some of the JCL macros are PAUSE (suspend execution, display a message), FLASH (flash a message on the screen a specified number of times), and INPUT (input a line of information from the keyboard).

JCL lets you write programs that do much more than just perform a calculation. As the name implies, they control an entire job, performing a variety of functions. You construct a sequence of commands and statements that control the action of the operating system and/or applications programs. For example, you could create a JCL file that shows you a directory, then loads Basic, runs a program—all automatically, initiated by a single command line.

(BUILD is also in Model III TRSDOS 1.3, for creating an automatic command input file that can be executed via the DO command. TRSDOS 1.3 also contains PAUSE.)

TRSDOS 6.0

TRSDOS 6.0 has some interesting commands not found in Model III TRSDOS 1.3. These include:

- CLICK: A keyboard filter gives the keys a "click" sound when they are pressed.
- COMM: Lets two computers communicate via a defined device. This terminal program includes disk file send and receive, and modem support including 1200 baud.
- FILTER: Modifies data as they are read from or written to a device, for a particular application, such as altering printer output.
- MEMDISK: Lets you set aside part of the available RAM memory to function as a pseudo floppy disk drive that responds "keystroke-quick" rather than at the slower disk access speed. You can COPY, BACKUP, PURGE, and display the directory of MEMDISK files.
- REPAIR: Updates and modifies information on Model I TRSDOS disks to make them readable under TRSDOS 6.0. (Use CONV for Model III disks.)
- RESET: Returns a device to its original startup condition. Closes open files if given a file specification.
- ROUTE: Routes one device to another device, disk file, or to nothing (NIL).
- SETKI: Sets the keyboard repeat rate and delay parameters.
- SPOOL: Permits printing data while performing other operations, such as writing a Basic program.
- SYSGEN: Creates a configuration file to store information about the way your system is set up.
- TAPE100: Lets TRSDOS 6.0 read a Model 100 cassette tape file and write it to Model 4 disk as an ASCII file, or read a disk file and write it as a Model 100 tape file.
- VERIFY: Turns the verify function on and off. When verify is on, TRSDOS reads the data it writes to disk to verify that the data are readable.

TRSDOS 6.0 allows you to assign strings to the alphabetic keys, so you can enter often-used TRSDOS or Basic commands with a single keystroke, to speed up your programming.

TRSDOS 6.0 sorts directory listings alphabetically by filename. It also includes the FORMS command, which sets up printer parameters to let you tailor printouts and handle preprinted forms. You can change the number of lines per page, set margins, set page length, indent, and perform other similar word processing-type functions.

Someone must have felt that the KILL command, for deleting specified files from the disk directory (to free the disk space for other uses) sounded too bloodthirsty. In TRSDOS 6.0, this function is now called REMOVE. But KILL still exists in Model 4 Disk Basic.

JCL does a lot more than just "control an unattended computer."

Model 4 Basic

The Basic for the Model 4 is a new Microsoft version. It permits 40-character variable names. That is, the first 40 characters of a variable name are consid-

SUCCESS STARTS HERE

game home and watch your child play, you'll know the excitement of a winning choice.

Active Family

Your family and CAI's growing family of animated, full-color programs have a lot to share—beginning with a willingness to reach beyond the ordinary to achieve the best.

At Your Command

You may meet a princess, a juggler or a dragon in *Wizard of Words.*™ You may appear as a guest on TV in *Master Match,*™ *The Game Show*™ or *Tic Tac Show.*™ Or, you may extend these programs still further with our *LearningWare*™ diskettes, offering hundreds of questions matched to the teaching strategies in the games. In every case, CAI puts a world of imagination and learning at your fingertips. And puts you and your child in control.

Unique Approach

Key features place CAI thinking tools in a class by themselves: Each program comes with its own *library of subjects.* But that's just the start. Our unique *authoring system* let's you or your child create your own lessons on any topic, tailoring the program to your family's needs—and no computer knowledge is required. Add the fact that we've kept the vital ingredient—*FUN*—in learning, and our *proven success* is no surprise. Over 2,000 school districts now use CAI programs to teach essential vocabulary and logic skills in a variety of subject areas.

CAI supports its products—and you—with an unconditional guarantee and a free backup disk. And provides compatibility with the most popular computers: Apple,® IBM® (and soon Commodore™).

Wise Choice

CAI is a group of experienced educators and programmers who believe that success begins with opportunities you create at home. Ask to see a demonstration of CAI programs at your local computer store, and see for yourself just how rewarding a good education can be.

Computer Advanced Ideas CAI™

Bringing Ideas Home

1442A Walnut Street, Suite 341
Berkeley, CA 94709 (415) 526-9100

Apple is a registered trademark of Apple Computers, Inc. IBM is a registered trademark of IBM Corp. Commodore is a trademark of Commodore Business Machines, Inc.

CIRCLE 130 ON READER SERVICE CARD

ered significant. In Model III Basic, only the first two characters of a variable name are significant.

Some of the new and interesting statements and commands found in Model 4 Basic are:

- COMMON: Passes one or more variables to a chained program.
- CHAIN: Loads a Basic program, chains it to the main program, and begins running it.
- WHILE/WEND: Executes a series of program statements in a loop for as long as a given condition is true.
- WAIT: Suspends program execution until a machine input port contains a specified value.
- WIDTH: Sets the line width for printing on the display or on a printer.
- DATE$: Returns the current system date.
- ERR$: Returns the number and description of the most recent Basic disk-related error.
- HEX$: Calculates the integer hexadecimal value of the number specified, and returns the value as a string.
- ROW: Returns the current vertical (row) position of the cursor on the display.

Some of these are taken from Model II Basic. Some of the Model III Basic statements and commands not found in Model 4 Basic include all 15 CMD functions (such as CMD "z" to duplicate the output to display and the printer), and the cassette statements CLOAD, CLOAD?, CSAVE, INPUT#-1, and PRINT#-1.

Sound

Although the Model 4 brochure says the computer has sound ("obtainable from Basic with sound command including tone and duration"), somehow it got left out of the Model 4 manual.

Model 4 sound is programmed just like the TRS-80 Color Computer sound: using SOUND F,D where F specifies the frequency, and D the duration. However, Color Computer sound is meant to be used for creating music as well as sound effects, so both its F and D range from 1 to 255.

Model 4 sound is meant only to be used to "signal a business alert," as one Computer Center salesman put it. The frequency ranges from 0 to 7, the duration from 0 to 31.

Musically, the eight tones range from C to G-sharp, omitting the E. There may be some tunes you could play with this two-thirds of an octave, but I didn't spend much time trying to find them.

With a duration of 0, a tone is sounded for about 1.5 seconds; with a duration of 31, about 12 seconds.

The range of frequencies and durations permits you to write a variety of "business signals" similar in function to Army bugle calls that sound reveille, chowtime, and charge. You could have each error condition play its own little tune, a few notes to let the operator know there is a "device in use," "disk space full," or "out of data" problem.

Manuals

Three manuals and a quick reference guide are packed with every TRS-80 Model 4. One has been around for a couple of years, *Getting Started With TRS-80 Basic: For use with Models I & III.* The other two are new, for the Model 4.

A Model III Owner's View of the Model 4

David H. Ahl

As many of you know, *Creative Computing* has been a heavy user of Radio Shack Model I and III computers for quite some time. Much of the editing of the magazine is done with the *Electric Pencil* word processing package on the Model III and our typesetting machines were originally driven by Model Is; they have now been replaced by LNW machines, among the most reliable computers around.

In any event, when TRSDOS 1.3 was announced, we elected, for the most part, to continue to use TRSDOS 1.2 since we had such a large library of files (over 100 disks). Unfortunately Radio Shack did not provide any easy means of updating 1.2 files to 1.3 except he cumbersome XFERSYS utility in later releases of TRSDOS 1.3.

Unfortunately, this now prevents us from using the Model 4 at all. The Model 4 does not run TRSDOS 1.2, nor is any means provided to convert 1.2 files.

Steve Gray's writeup may lead you to believe it is easy to run TRSDOS 1.3 Model III software on the Model 4. It is, as long as you are content with emulation mode, but considerably less easy if you want to take advantage of the Model 4 features. Indeed, many programs just plain will not convert to the Model 4 using the Convert utility. For those programs, you are stuck with Model III emulation mode.

Although the documentation that comes with the Model 4 is an improvement over that of its predecessor, it is still a far cry from what we would rate as "user friendly." Only the 45-page introductory manual and 38-page Quick Reference Guide could be considered friendly; the other two manuals seem more designed to encourage experimentation and more than a little frustration.



Figure 1. The bottom pair of pixels in Model 4 graphics characters are only half as high as the other two pairs.

Along with the Model 4, Radio Shack offers a rather complete line of hardware—modems, printers, plotters, and the like. However, we feel that the customer should be able to make up his own mind what printer or modem he wants to use. Unfortunately, Radio Shack doesn't encourage this sort of thing at all. You say you want to hook up a non-Radio Shack something or other to the RS-232 port? Lots of luck figuring out which are the active lines or whether the port adheres to the industry standards (it does—more or less).

While the manual tells us that "the RS-232C port lets you communicate with another computer, a modem, or a serial printer," it is extremely short on the details of how to do this.

Bottom line: at first glance, the Model 4 looks like a very nice improvement over the Model III, but Model III owners will want to think long and hard before upgrading to a Model 4. Many programs will have to be run in emulation mode; the documentation is only slightly better than that of the Model III; and software in anything but TRSDOS 1.3 and LDOS will not run at all (yes, your Big 5 games will run). Also, easily running non-Radio Shack peripherals remain an elusive dream.

WORD PROCESSING THE DECISION IS EASY!!!

Datasoft eliminates the frustrations of choosing a word processor. When it comes to ease of use, versatility, and price, Datasoft beats the competition hands down, and now both Text Wizard™ and Spell Wizard™ have been combined into a specially marked package to save you $20.00.

Text Wizard, one of few programs to receive four (4) excellents on the Infoworld Report Card Review, let's you create letters, documents, reports and much, much more. It's as simple as a few keystrokes to edit, erase, move lines or paragraphs.

With Spell Wizard and its 33,000 + Word Dictionary, you can eliminate embarrassing typos or spelling errors.

Text Wizard
Atari 400/800 (32K min.)

Spell Wizard
Atari 400/800/1200 (32K min.)

Spell Wizard automatically indicates errors, and allows you to immediately view your dictionary for easy correction. You can also create or add unique words to your own custom dictionary.

You might expect to pay $79.00 to $99.00 for only one of these programs, however, Text Wizard normally $49.95 and Spell Wizard normally $49.95 suggested retail, can both be purchased for a limited time in specially marked packages for only $79.95 total price, a savings of $20.00.

Check with your local dealer or send check or money order with $3.00 postage and handling (California residents add 6½% sales tax) to:

DATASOFT, INC.
9421 Winnetka Avenue, Chatsworth, CA 91311 (213) 701-5161

Datasoft®

Spell Wizard, Text Wizard, and Datasoft are trademarks of Datasoft, Inc. ©1983 DATASOFT® INC

CIRCLE 147 ON READER SERVICE CARD

TRS-80 Model 4, continued...

Introductory Manual

So that the new computer users won't panic at the sight of a huge manual, Radio Shack has included a nice little 45-page manual—actually more of a booklet—"Introduction to Your Disk System: TRS-80 Model 4."

This manual is full of drawings and examples, and is designed for beginners. It shows, simply and carefully, "how to set up the Model 4, how to use important commands, how to run application programs, how to store information, and what to do in case of trouble."

The seven chapters cover How Computers Work, Getting to Know Your Model 4, Using TRSDOS to Prepare Disks, Running Application Programs, Learning to Program in Basic, In Case of Trouble, and That's Just the Beginning. That last chapter gives a peek at some application programs, other languages, some other TRSDOS commands, and operating systems.

The application program described in Chapter 4 is MailList, which is provided on the TRSDOS disk. The user learns how to enter names and addresses, change or delete them, list them, and copy the disk file to another disk. MailList is handy for teaching the basics of interacting with a simple application program, and can also be used "for real."

Model 4 Disk System Owner's Manual

The 486-page looseleaf Model 4 Disk System Owner's Manual consists of three sections: TRSDOS, Basic, and 11 appendixes.

The TRSDOS section is different from the Model III TRSDOS manual, mainly in that much more information is given. The 142 pages are devoted to 44 commands, as compared with 60 pages covering 35 commands in the TRSDOS 1.3 manual. The description of commands that are the same on the two computers have been rewritten and expanded, adding helpful information.

The Basic section combines what the Model III manual provided in two pieces: a bound volume called Operation and Basic Language Reference Manual and 65 looseleaf pages on Disk Basic. The tutorial section on Basic Concepts is taken unchanged from the Model III manual. It is unfortunate that this section wasn't also expanded, because more information is needed in several areas, such as logical operators, which get only one page.

The appendixes cover Job Control Language, Model 4 Hardware (technical specifications), Character Codes, Error Messages, Converting TRSDOS Version 1 Programs to TRSDOS 6.0 Programs, Basic Keywords, Basic Worksheets, Glossary, five brief TRSDOS programs, Basic Memory Map, and Using the Device-Related Commands.

Although it provides more information, the Model 4 Disk System Owner's Manual is printed from typed pages, and thus isn't as elegant or quite as easy to read as the typeset Model III manual.

Quick Reference Guide

The Model 4 Quick Reference Guide is much more extensive than most other such TRS-80 guides. Its 38 pages provide information on Startup, TRSDOS Commands, Utilities and Error Messages, and Basic Statements and Functions, Control Keys, Operators, Edit Commands, Special Characters, Error Messages, and Internal Codes.

Three Models

The 4 comes in two 24-line disk models: with 64K of RAM and one disk, at $1,699; with 64K, two disks and RS-232C, $1,999. A 16K cassette-based starter system, displaying 16 lines on the screen, running Model III Basic, and without disk drives, is $999. The internal RAM memory of the disk models can be expanded to 128K with a $149 64K RAM kit.

Many students of engineering, science, and mathematics are buying the Model 4.

The Model 4 prices do not include Model III TRSDOS 1.3 or CP/M Plus system disks. You get one system disk, the Model 4 TRSDOS and Basic Interpreter. Although the RSC-9 catalog doesn't mention it, there is a Model III TRSDOS 1.3 system disk available for $14.95, catalog number 26-0312. The CP/M Plus system disk for the Model 4 wasn't available at this writing, nor had an availability date been set.

I have heard that there is a special 48K version of the Model 4 for schools, with an RS-232C interface, no disk, and a special ROM, configured for the Network 3 Controller that connects up to 16 Model 4 student stations to a teacher's "host" system.

A Model 4 Upgrade Kit ($799 plus installation) converts a Model III to a Model 4, except for the cabinet, disk drives, and CRT. It includes a new keyboard, CPU board, 64K RAM, sound, TRSDOS 6.0, and Disk Basic.

Bit-mapped high-resolution graphics cost less for the Model 4 ($249.95 plus installation) than for the Model III ($369.95 plus installation). This is because some of the required hardware is already in the Model 4. The hi-res package includes a Graphics Basic with commands like PAINT, LINE, and CIRCLE, to simplify creating graphics.

The Model 4 operating speed is also schizophrenic. It uses a 4-MHz clock rate in Model 4 mode, but the 2-MHz rate of the Model III when operating in Model III mode.

To operate Model III software, the Model 4 contains a Model III ROM. Thus TRSDOS 1.3 runs on the Model 4 without changes.

The Bottom Line

The TRS-80 Model 4 is more of a business computer than the Model III, and many are being bought as executive computers. The Job Control Language permits it to work unattended after business hours. And the Model 4 runs programs written for it twice as fast as the same programs written for the Model III.

Many students of engineering, science, and mathematics are buying the Model 4. (Some students, who can afford a more expensive computer, and who don't feel challenged enough by the Model 4, are buying the Model II.)

The Model 4 appeals to a broader market than the Model III because it can run CP/M programs, displays 24 lines of 80 characters, and has more memory. It fits into the TRS-80 product line between the superseded II and III; the Model 4 does all the III could and some of what the II could do, because it has more memory and a better and faster disk operating system, TRSDOS 6.0, which has more functions than TRSDOS 1.3.

For anybody, whether businessman or student, one of the biggest attractions of the Model 4 is its ability to run programs written under three different operating systems—TRSDOS 1.3, TRSDOS 6.0, and CP/M Plus—which makes more programs available for the Model 4 than for any other Radio Shack computer. □

"You're trying to induce anorexia in gypsy moths with junk food, . . . uh huh, . . . who authorized this?"

WE'RE VERY HARD ON OUR SOFTWARE

You might even say we're perfectionists. Because at Softsmith,™ we give our software the hardest workout, the toughest testing, the most rigorous evaluation. The result is software that has earned our confidence, and will justify your trust.

In particular, we do three things that make Softsmith software the most dependable you can buy.

1.

We're picky. Out of the hundreds of programs Softsmith evaluates every month, we choose to publish very few. A lot of good programs are rejected; but we think you can't be too picky when it comes to personal computer software. Our selectivity is your best assurance of quality.

2.

We complain a lot. If you were a programmer, and Softsmith accepted your program, you would have a right to be proud. But you shouldn't go on vacation yet. Because no matter how good that program may be, Softsmith evaluators will suggest some improvements; politely, but firmly. We may complain a lot, but people thank us later.

3.

We insist on plain English. After we've made the best program better, we're still not finished. Because we know that even the best program is no good if it's too hard to use. So we put a lot of time and effort into translating our instructions from computerese into plain English.

We publish software you can trust. Yes, we pick our programs carefully. And complain a lot to make them better. And insist on plain English instructions. The result is a library of personal computer software you can depend on. Even if you don't know a Pascal compiler from an emulation subroutine.

Softsmith has programs you can trust for all the most popular personal computers. Programs for Education, Home Management, Entertainment, Word Processing, Business, Communications and Programming. Ours is the largest library of quality software under one brand name.

So before you choose a software package for your computer, make sure someone's taken the time to be hard on it. Make sure it's Softsmith, the software you can trust.

Ask for Softsmith brand software wherever computers or software are sold. Or call us TOLL-FREE at **(800) 341-4000** for the name and location of your nearest dealer.

To see a few of the programs that made it, read on.....

Softsmith, Corp., 1431 Doolittle Dr., San Leandro, CA 94577. A company of The Software Guild.™

SOFTSMITH™

SOFTWARE LIBRARY

LOGOMOTION™ MAKES LEARNING THE NAME OF THE GAME

Can a computer think? This question has intrigued people since the very beginning of the Computer Age.

With Logomotion, from Softsmith™ Corporation, anyone from young children to adults can use the personal computer to answer that question. Through its power to draw pictures, make music, and create programs, Logomotion allows you to explore the exciting intellectual potential of your computer. Along the way you'll gain valuable insights into the way your own thinking works, and create an environment where learning computer programming is fun.

Like most Logo-based programs, Logomotion starts children out with turtle graphics. By "teaching" a computer turtle how to draw shapes and pictures, children learn the basics of geometry and programming. Logomotion even lets them print out their drawings or save them on disk, to be changed later, or included in other programs.

Softsmith's Logomotion goes far beyond turtle graphics, to include music synthesis, file handling, text editing and even a game called "Animal."

Logomotion runs on the Apple® II, II + and IIe; Franklin Ace®; Commodore 64™ and IBM PC® computers with 64K RAM and one disk drive.

Like the other programs in the Softsmith library of quality software, Logomotion has been tested, improved and clearly documented to make it the most dependable, easy-to-learn Logo-based program you can buy. The Softsmith library also includes software for the most popular personal computers — programs for Education, Home Management, Entertainment, Business, Word Processing, Communications and Programming.

Ask for Softsmith brand software wherever computers or software are sold. Or call us Toll-Free at (800) 341-4000 for the name and location of the dealer nearest you.

Dealer inquiries are invited.

Apple II, II +, and IIe are registered trademarks of Apple Computer, Inc. Franklin Ace is a trademark of Franklin Computer Corp. IBM PC is a registered trademark of International Business Machines, Inc. Commodore 64 is a trademark of Commodore Business Machines, Inc.

SOFTSMITH™

SOFTWARE LIBRARY

CLONE YOUR IBM PC WITH MULTI-RAM™

Integrated software, programs that work simultaneously and share information between them, is here today. With Multi-RAM, from Softsmith™ Corporation, you can integrate your present IBM PC software for less than $100.*

Think of it! You can simultaneously run up to 9 programs on your IBM PC or XT: your spreadsheet, word processor and data base, plus six other programs all at the same time. You can easily shift between those programs in a fraction of a second using a single key. And for the first time you can extract and move data or text from one program to another, instantly, and without losing any of your original data.

Multi-RAM actually enhances your IBM operating system to partition the machine memory (128K RAM minimum required) into as many as 9 segments.

Multi-RAM is also the first program that gives you the option of using your IBM PC with two monitors at once, each displaying a different program. Use word processing, for example, on one monitor, and a spreadsheet program on the second. Your computer never had such flexibility.

Multi-RAM is brand new, but that doesn't mean it's unproven. At Softsmith, we carefully test, improve and clearly document all of our programs, to make our software the most dependable you can buy. And we back it with a Toll-Free customer service number you can use to get expert help, anytime.

Softsmith has the largest library of programs under a single brand name—quality programs for Education, Home Management, Entertainment, Word Processing, Business, Communications and Programming, for the most popular personal computers.

Ask for Softsmith brand software wherever computers or software are sold. Or call us Toll-Free at (800) 341-4000 for the name and location of your nearest dealer.

Dealer inquiries invited.

IBM PC and IBM XT are registered trademarks of International Business Machines, Inc.

*Based on suggested retail price.

SOFTSMITH™

SOFTWARE LIBRARY

SMITHWRITER™ JUMPS OVER THE QUICK BROWN FOX

Take a great leap forward in word processing with Smithwriter, from Softsmith™ Corporation. It's the dependable, inexpensive and easy-to-use text-handling program for your Commodore 64 or VIC-20.*

Smithwriter uses its power to simplify the mechanics of writing. Other programs require multiple keystroke commands for most editing functions. Smithwriter does them with a single stroke. And Smithwriter's simplicity carries over to the instructions, too. They're written in that rarest of all computer languages, plain English.

Don't let the simplicity fool you, though. Smithwriter does things you would expect to find in programs costing at least 3 times as much: automatic centering, super- and subscript printing, underlining, italicizing and double-width spacing. The program is already configured for the most popular printers, so you can start using it right away.

Whether you're writing the Great American Novel or letters to friends, Smithwriter is the program you should trust with your words. It's part of the Softsmith library of quality software. All Softsmith programs have been painstakingly tested, improved and clearly documented to create the most dependable brand of software you can buy. Softsmith has the largest library of software programs under one brand name, for all the most popular personal computers. Programs for Education, Home Management, Entertainment, Business, Communications and Programming. All are backed by our Toll-Free customer service number, to give you expert help if you need it.

Ask for Softsmith brand software wherever computers or software are sold. Call us Toll-Free at (800) 341-4000 for the name and location of your nearest dealer.

Dealer inquiries invited.

*Requires 16K expander for VIC-20. Available on disk or cassette for both the Commodore 64 and VIC-20.

Commodore and VIC-20 are trademarks of Commodore Business Machines, Inc. Quick Brown Fox is a trademark of Quick Brown Fox.

SOFTSMITH™

SOFTWARE LIBRARY

CROSSWORD MAGIC™
A GAME DESIGNED TO GET YOU DOWN (AND ACROSS)

What's a five-letter word meaning report? The capital of a Baltic country, 6 letters, starts with W? If these questions get you thinking, you've obviously got the crossword bug. There is no cure, but Crossword Magic, from Softsmith™ Corporation, is just the treatment the doctor ordered. It is a challenging, intelligent game that will help you improve your vocabulary while you're having fun.

With Crossword Magic, you create your own puzzles to challenge your friends. First you choose a topic; then you enter words using the keyboard. Crossword Magic automatically fits the common letters together to form a familiar crossword grid. If there is no opening for the word you enter, the program saves it and fits it in later.

Next comes the fun. After the puzzle is full, Crossword Magic prompts you for a clue to go with each word. Make your clues as obscure, humorous or serious as you want. You can save the puzzle and clues on disk for later play on the screen, or have them printed out to send to friends.

Crossword Magic runs on the Apple® II, II + and IIe; Franklin Ace™ and Atari 800™ computers with 48K RAM. A disk drive is required; printer is optional.

More than just a game, Crossword Magic is also an excellent educational tool for helping children of all ages improve their spelling and vocabulary skills. It is one of the programs in the Softsmith library of quality software – the largest library of programs under one brand name.

Softsmith has the most thoroughly tested, refined and clearly documented brand of personal computer software you can buy. You can depend on Softsmith programs for Education, Home Management, Entertainment, Word Processing, Business, Communications and Programming. And we back them with our Toll-Free customer service number.

Ask for Softsmith brand software wherever computers or software are sold. Or call us Toll-Free at (800) 341-4000 for the name and location of the dealer nearest you.

Dealer inquiries are invited.

Apple II, II + , and IIe are registered trademarks of Apple Computers, Inc. Franklin Ace is a trademark of Franklin Computer Corp. Atari 800 is a registered trademark of Atari, Inc.

SOFTSMITH™

SOFTWARE LIBRARY

SOME OF THE PROGRAMS THAT HAVE MADE THE GRADE

EDUCATION

Algebra I	Apple
Algebra 2	Apple
Algebra 3	Apple
Algebra 4	Apple
ArithmeVic	VIC 20
The Changer	TRS 80
Color Me	Apple
Con*Putation	Apple
	Atari
Counters	TRS 80
Decimals	Apple
	Atari
Fractions	Apple
	Atari
Function Plot	IBM
Games of the U.S.	Apple
The Game Show Movies and T.V.	Apple
People, Places, Things	Apple
Gradebook Plus	Apple
History & Geography	Apple
Jesse's Busy Bugs	TRS 80
Little Counter	Apple
Little Speller	Apple
The New Little Speller	Apple
	Atari
LogoMotion	Apple
Math Skills	Apple
Meet the Presidents	Apple
Morse Code Trainer	VIC 20
Perception	Apple
PSAT Voc. Skills	Apple
Portfolio	Apple
Rainbow Forest	TRS 80
Reading Skills	Apple
	Atari
SAT Voc. Skills	Apple
So Big So Small	TRS 80
Spell Master System	Apple
Spell Master #4	Apple
Spell Master #5	Apple
Spell Master #6	Apple
Spell Master #7	Apple
Spell Master #8	Apple
Spell Master/Adult	Apple
Statistics	Apple
The New Step by Step	Apple
Supermap	Apple
Tanjall	TRS 80
The Big Math Attack	Apple
	Atari
Tic Tac Show Fun With Facts I	Apple
Touch Typing Tutor	COM-64
	VIC 20
Vic Lemonade	VIC 20
The Visible Computer	Apple
Win With Words I	Apple
Win With Words II	Apple
Word Search	Apple

GAMES/ ENTERTAINMENT

Abuse	Atari
Acey-Deucy	Apple
	Atari
Add-Em Up	VIC 20
Alien Invasion	COM-64
	VIC 20
Alien Panic	COM-64
Antimatter Splatter	VIC 20
Astro Attack	Apple
The Catch	VIC 20
Championship Blackjack	IBM
Chimp Chase	VIC 20
Chomps	IBM
Conglomerates Collide	Apple
Cosmic Combat	Apple
Creature Venture	Apple
Cribbage	COM-64
Cross Country Rallye	Apple
Crossword Magic	Apple
	Atari
Cyborg	Apple
	IBM
Cyclons	COM-64
	VIC 20
Defender on Tri	VIC 20
Eureka	TRS 80
Exterminator	VIC 20
Falcons	Apple
Final Frontier	Apple
Firebird	Apple
Fun 10	IBM
Gold Rush	Apple
Guardian	Apple
Haunted HIII	Atari
Head On	COM-64
	VIC 20
High Orbit	Apple
Horizon V	Apple
The Island Prison	Apple
It's A Living	VIC 20
Juggler	Apple
Keyboard Golf	Apple
Killer Caterpillar	VIC 20
Krazy Kong	VIC 20
L.A. Land Monopoly	Apple
Launch 2031 AD	VIC 20
Laser Blazer	TRS 80
Lazer Maze	Apple
Lazersilk	Apple
Lookahead	Atari
Lunar Pinball	Apple
Mad Painter	VIC 20
Matchmaker 64	COM-64
Match Racer	Atari
Math Football	Atari
Max-Command	Apple
Midnight Malady	Apple
Monster Match	VIC 20
Mummy's Curse	Apple
Neptune	Apple
Paratrooper	VIC 20
Pathfinder	Atari
The Prisoner	Apple
Pollywog	Apple
Racefun	VIC 20
Regilian Worm	TRS 80
Russki Duck	Apple
Snake Out	VIC 20
Space Chase	TRS 80
Space Conquerors	Apple
Spax	TRS 80
Starblaster	Apple
Swordthrust (series)	Apple
3-D Man	COM-64
	VIC 20
Ticker	VIC 20
Trickshot	Apple
Trivia Trek	Atari
Vikman	VIC 20
Volcanoes	Apple
Zenith	Apple

HOME APPLICATIONS

Automaniac	Apple
Computer Artist	VIC 20
Dietician	Apple
Dinner on a Disk	Apple
Drinks on a Disk	Apple
Home Accountant	Apple
	IBM
	TRS 80
Home Budget	TRS 80
Home Budgeter	Apple
Micro Barmate	Apple
Micro Cookbook	Apple
	IBM
OPTIONX	Apple
Roots-M	Apple
Synthy	COM-64

BUSINESS

Accounts Payable	Apple
Accounts Receivable	Apple
General Ledger	Apple
Mailing List	IBM
Payroll	Apple
Retail Sales Management	IBM
Stock Charting	IBM
Timetable	TRS 80

DATA BASE

Condor I	Apple CP/M
Condor III	Apple CP/M
Data Base Manager	IBM
Datadex	Apple
EZ*Telephone	IBM
FCM	Apple
List Master	Apple
PC Mailer	IBM

WORD PROCESSING

Electric Webster	TRS 80
Sensible Speller	Apple
Smithwriter	COM-64
	VIC 20
Wordsmith	Apple

UTILITIES

The Bug	Apple
Bugbyter	Apple
Character Generator	IBM
Cross Reference	IBM
Disk Director	Apple
Faster Master	Apple
Graphic Print Screen	IBM
Hi-Res Multicolor Graphic	VIC 20
The Liberator	Apple
Mach-20	VIC 20
Memory Disk	IBM
Monitor 5	TRS 80
Multi-Disk Catalog	Apple
Multi-RAM	IBM
Peeks 'N Pokes	IBM
Screen Print	VIC 20
Spool	IBM
System Diagnostics	TRS 80

COMMUNICATIONS

SecureGuard	AP/CPM

MEDIA

5¼" Blank Diskettes
(12 to a box)
(100 to a box)

Softsmith, Corp., 1431 Doolittle Dr., San Leandro, CA 94577. A company of The Software Guild.™

SOFTSMITH™

SOFTWARE LIBRARY

The TRS-80 MC-10

Too little, too late for too much?

Owen Linzmayer

Not inclined to let the TRS-80 Color Computer fade into obscurity, the executives at Tandy have introduced the Micro Color Computer; better known as the MC-10. This new machine functions like a stripped down Color Computer, but looks like a slightly enlarged Timex Sinclair 1000.

creative computing

HARDWARE PROFILE

Product: TRS-80 Micro Color Computer MC-10

Type: Personal

CPU: 6803

RAM (min/max): 4K/20K

ROM: 8K

Type of keyboard: 47-key "Chiclet"-style

Text resolution: 32 x 16

Graphics resolution: 64 x 32

Number of colors: 8

Sound capability: Yes

Ports: 1500-baud cassette and RS-232C serial I/O

Dimensions (HxWxD): 2"x8.5"x7"

Documentation: 134-page manual and reference cards.

Summary: Will need more than luck to make it.

Price: $119.95

Manufacturer:
Radio Shack - Tandy Corp.
Fort Worth, TX 76102

The MC-10 is appropriately called the Micro Color Computer. Measuring a petite 2" x 7" x 8.5", the MC-10 takes up very little table space. It is so small in fact, that it is almost dwarfed by the CCR-81 Radio Shack tape recorder it uses as a storage device.

When we look at new computers such as the Timex Sinclair 2000, TRS-80 Model 100, and the TI CC-40, it becomes obvious that computer designers are infatuated with the idea that smaller is better—or at least cuter. The size of the MC-10 supports this theory.

If not for the white plastic case, the MC-10 might very well be mistaken for a Sinclair ZX81 with an improved keyboard. The Micro Color Computer has a 48-key "Chiclet"-style keyboard with almost every key having a normal, shifted, and control value. Using the control key, you can enter entire Basic keywords with only two keystrokes. This is helpful since the keys themselves are so close together that it is virtually impossible to touch type on the MC-10.

Another unfortunate feature of the keyboard is the lack of a shift key on the lefthand side of the keyboard. The control key is positioned right where you expect the second shift key to be located. It is extremely annoying to get the control keyword when you wanted the shifted character instead.

I must say, though, that the MC-10 has a much more responsive and reliable keyboard than that of the Mattel Aquarius

computer of which I was very critical. (Mattel has since introduced the Aquarius II; the same machine with a full-stroke keyboard.)

Rearview

Looking at the back of the MC-10, the first port on the right is a 5-pin DIN connecter for cassette interface. The Micro Color Computer uses the same cables and cords as all of the other TRS-80 computers, thus making the most of the accessories including the tape recorder, compatible. Unlike other Radio Shack computers, the MC-10 does not turn off the cassette motor when not loading or saving.

The MC-10 has a cassette baud rate of 1500; the same as the Color Computer. This might lead you to believe that you can transfer programs back and forth between the two machines—well you can, and you can't. Although you can load the same Basic program on both computers, each interprets the keywords, functions, and commands differently because of the tokens used. This means that except for the line numbers and variable names, the Basic programs are completely changed. See Figure 1 for an example of this.

If I were a knowledgeable machine-language programmer, I would immediately write a transfer utility to rectify this problem by converting the token values. I sincerely hope that Tandy will supply such a program, but I am not optimistic.

To the left of the cassette socket is the RS-232C serial I/O port. Using a 4-pin DIN to male DB-25 cable, you can connect the MC-10 directly to a modem, printer, or another computer that has serial communication capabilities. Adjacent to the serial I/O port is a large red reset button. If the MC-10 ever "hangs up" while in operation, pressing the reset button usually returns control to the user without violating memory.

Centrally located on the rear of the computer is a 34-pin edge connector that is hidden from view behind a removable metal cover. This connector is the expansion port of the MC-10, and as far as we

Rear of MC-10 showing (l-r) AC adapter, video out, reset button, serial I/O, and cassette port.

are told, the 16K RAM memory module is the only thing that plugs in here. It might also be used as a program cartridge slot, but Radio Shack refuses to elaborate on this.

Also found on the back of the unit are the RCA video out connector and the AC power adapter plug. The MC-10 outputs its video signal to television channels 3 or 4. The channel select switch is located on the bottom of the computer. The power for the MC-10 does not come directly from a wall socket; it must first pass through an AC adapter which is included in the computer package. The MC-10 uses a non-standard transformer—120V in, 8V out at 1.5A.

The power is turned on and off with a sliding switch found on the righthand side of the computer. Unfortunately, there is no power indicator anywhere on the unit. This is one of the shortcomings of the original Color Computer that has somehow survived the evolution process.

The Insides

Advertised as "the perfect choice for computer beginners," the MC-10 costs $119.95 and comes with 4K of user RAM. While this may be a sufficient amount of memory for a novice, if you want to write larger programs, a 16K RAM module costs an additional $50.

With the plug-in module installed, the MC-10 realizes its maximum—20K of user RAM. If 20K doesn't seem like much in a world of new machines starting with 64K, that is because it is not. A comparable system, the long awaited Timex Sinclair 2000 computer, is capable of high-resolution color graphics and comes with 40K RAM. The Timex is supposed to be expandable to 72K and will initially cost around $150.

Our benchmark tests prove that using an 8-bit Motorola 6803 microprocessor, the MC-10 performs arithmetic computations in Basic 10% faster than the Color

ABS	LPRINT
ASC	MEM
CHR$	MID$
CLEAR	NEW
CLOAD	ON..GOSUB
CLOADM	ON..GOTO
CLOAD*	PEEK
CLS	POKE
CONT	POINT
COS	PRINT
CSAVE	PRINT TAB
CSAVE*	PRINT@
DATA	READ
DIM	REM
END	RESET
EXEC	RESTORE
EXP	RETURN
FOR/NEXT	RIGHT$
GOSUB	RND
GOTO	RUN
IF/THEN	SET
INKEY$	SGN
INPUT	SKIPF
INT	SIN
LEFT$	SOUND
LEN	STOP
LET	STR$
LIST	SQR
LLIST	TAN
LOG	VAL

Figure 2. MicroColor Basic commands, statements, and functions.

Interior view of MC-10.

Figure 1.

```
10 CLS 0
20 FOR J = 0 TO 7
30 T = J * 16
40 FOR D = 0 TO 31
50 X = 134
60 PRINT CHR$(X+T);
70 NEXT D
80 NEXT J
90 END
```

MC-10 sample program.

```
10 RESET 0
20 FOR J [ 0 EXEC 7
30 T [ J STEP 16
40 FOR D [ 0 EXEC 31
50 X [ 134
60 DATA COLOR(XTHENT);
70 END D
80 END J
90 INPUT
```

Same program loaded into Color Computer.

Computer without sacrificing accuracy. This means either that the MC-10 has less overhead in Basic, or that the 6803 has a faster clock rate than its older brother, the 6809. Both of these chips are from the same 6800 family.

The MC-10 has a text resolution of 16 lines, with up to 32 characters per line. Like the Color Computer, it displays lowercase characters in inverse video. The highest graphics resolution directly accessible through Basic is 64x32 pixels. You can have all eight colors on the screen at the same time, but it is impossible to mix two colors within the same character block. This limits the animation capabilities of this lo-res machine. High-resolution graphics are, however, possible through POKEs and machine language programming. The video display is very crisp and precise with none of the flickering or ghost effects that are so common on other low-end computers.

The MC-10 uses a Basic interpreter written by Microsoft called MicroColor Basic. This version of Basic is very similar to the non-Extended Color Basic found on the Color Computer. See Chart 2 for a list of the MicroColor Basic commands, statements, and functions. Text oriented programs written for the Color Computer that use less than 4K should convert easily to the MC-10. Unfortunately, because of the cassette problem mentioned earlier, you must key the programs in by hand.

Documentation

The MC-10 comes with a quick reference card in addition to a 133-page "Operation and Language Reference Manual." The manual is easy to read, but does not take enough time to explain thoroughly the Basic commands. It is not written in the "cutesy" manner as are the TRS-80 Model I instruction guides. It should be noted that this manual contains very little technical or hardware material. If you are a serious hacker, you will have to do your own experimentation and exploration.

It is unfortunate that Radio Shack did not introduce the MC-10 during the first few months of 1983, before the computer price battle escalated into a full-scale war. The cut-throat competition between manufacturers has caused drastic drops in computer prices. You can buy a ZX81 for under $50, an Atari 400 for less than $100, and a TI 99/4A for about the same amount. All of these machines are on their way out, but they still represent tremendous values in today's market.

I do not understand how Tandy expects to sell many Micro Color Computers for $119 when more powerful machines with established software bases are retailing for much less. I wish the MC-10 luck, but I have a feeling it needs much more than luck to make it. □

Parents! The Top-Rated Software!*

Now you can choose from a variety of the most wanted programs—TUTORIALS, EDUCATIONAL GAMES, DISCOVERY ACTIVITIES, and more . . . all from EDUCATIONAL ACTIVITIES rated # 1 in educational software.* EA's new DAYBREAK division offers superior programs designed for children of various ages and abilities . . . at home!

- *The programs are all self-directing.*
- *No adult supervision is necessary.*
- *Tutorial programs are all self-correcting.*
- *Programs are all self-motivating.*

All programs are level-adjustable. Parent or child can vary their complexity and create new challenges as the child progresses.

The Programs Your Child Needs Most!

	AGE	TITLE, ORDER NO. and DESCRIPTION	PRICE
	3-5	DISCOVER! (DB-2000)—Directionality, colors, body parts with "sprites." Cue cards allow child to work independently. (not available on TRS-80).	$29.95
	7 & up	PERPLEXITY (DB-3000)—Classic puzzles challenge problem solving, logic and organizational skills. Several levels of difficulty.	$29.95
	7 & up	MATH BASEBALL (DB-4000)—Builds basic math skills. Several levels of difficulty.	$29.95
	10 & up	REGIONS of the U.S. (DB-5000)—Game-like program teaches major cities, land forms, products, and climates.	$39.95
T	8 & up	ADDITION AND SUBTRACTION OF WHOLE NUMBERS (DB-4030)	$29.95
U	9 & up	MULTIPLICATION AND DIVISION OF WHOLE NUMBERS (DB-4031)	$29.95
O	9 & up	ADDITION AND SUBTRACTION OF FRACTIONS (DB-4032)	$29.95
R	10 & up	MULTIPLICATION AND DIVISION OF FRACTIONS (DB-4033)	$29.95
I	12 & up	SIMPLE ALGEBRAIC EQUATIONS (DB-4055)—3 programs of progressively difficult levels. Level I—one variable, one operation. Level II—one variable, two operations, frequent use of parentheses. Level III—variable on both sides.	$39.95
A			
L			
S			

Programs available on Apple II or IIe. TRS-80, Commodore 64, PET, Atari 800. When ordering, please specify computer model and diskette or cassette format. Sorry, no cassettes for Apple.
To order, write or call. Send check, money order or charge to MasterCard or VISA. Include card number, expiration date and signature. Please add 5% for postage and handling. No C.O.D.

* Rating by Queue, Inc., publishers of "Microcomputers in Education"

"I buy more software from EA than from any other publisher."
Kathy Grubbs, Program Director, E. Whittier (CA) Middle Schools

DAYBREAK SOFTWARE (Div. of Educational Activities)
1951 Grand Avenue, Baldwin, N.Y. 11510
1-800 645-3739 (U.S.)
516 223-4666 (N.Y.)

CIRCLE 154 ON READER SERVICE CARD

Compute While You
the Buffer that

MICROFAZER PUTS YOU BACK TO WORK
Your computer helps you work fast. Unless the printer is running. Then it doesn't help you work at all. It won't let you enter data or process information. It simply won't compute.

That's where Microfazer by Quadram comes in. It's the print buffer that frees your computer. And lets you keep right on working.

THE BUFFER THAT REMEMBERS IT ALL
Microfazer stores data from your computer in its own memory, then sends it to the printer at the proper rate.

512K

You don't have to worry about losing vital information because of limited buffer space. Because Microfazer starts with 8K of memory and is expandable to 512K—a full half-megabyte. So it can keep pace with your needs. Now, and in the future.

THE ANY COMPUTER, ANY PRINTER BUFFER
Microfazer is perfect for any buffer task. Word Processing. Accounting. Graphics.

QUADRAM QUALITY

Available at retail stores worldwide.

Print with Microfazer,™ Remembers It All.

You name it. And it's perfect with any enhancement. Printers. Plotters. Even modems.



You'll find Microfazer in a variety of models and sizes. Some stand alone while others are stackable There's one that snaps onto the back of the popular MX Series Epson printers. And another that plugs inside an Epson MX or FX.

There's a Microfazer to interface incompatible devices. And for any data transmission need. Serial or parallel

QUADRAM REMEMBERS TOO

Whatever your system. Quadram has a buffer to handle it. Including Microfazer's counterpart: Interfazer, for buffering and controlling up to eight computers with one or two printers.

Quadram didn't forget the hardware features either. The Ready LED, manual Reset and Pause/Copy buttons are all part of the Quadram Quality tradition

A PRICE YOU'LL GO FOR

You'll be glad to know that you can get Microfazer backed by Quadram Quality at a price that won't stop you from owning one. Parallel to parallel versions start at $159 (8K) Serial to parallel, parallel to serial and serial to serial versions start at $199.

MICROFAZER. THE PRINT BUFFER THAT REMEMBERS IT ALL.

QUADRAM CORPORATION
An Intelligent Systems Company

4355 International Blvd./Norcross, Ga. 30093
(404) 923-6666/TWX 810-766-4915 (QUADRAM NCRS)

CIRCLE 202 ON READER SERVICE CARD

Ten grapefruit-size computers provide drill and practice on everything from Math to English.

creative computing equipment evaluation

Centurion Educational Computers

David H. Ahl

When is a computer not a computer? When it is a Centurion Digitor, Versator, or Alphator. While these devices are called computers, and presumably have microprocessors inside, they cannot be programmed in Basic and function solely as educational drill and practice devices. In this role, they do an exceedingly good job.

Centurion manufactures ten different computers in all, four for mathematics, five for language skills, and one for generalized drill in any subject area. We took a close look at Skillmaster, the top of the line mathematics device, and Versator, the generalized drill device. Most of our observations and conclusions will apply to all ten devices.

Skillmaster

To begin with, Skillmaster doesn't look like a computer. It is 8" in diameter, made of white plastic, and shaped a bit like a partially hollowed-out cantaloupe with keys. The keys are like those on a desk calculator (0 to 9, four arithmetic functions, and five keys for programming the unit). In addition, it has two slide switches over the keypad. A green LED display shows up to eight ¼" high numbers or symbols.

When Skillmaster is turned on (the power switch is in the rear), a short "program" must be entered before it will do anything. This consists of pressing R (reset machine), P (to start program), one of four mode keys (sequential, standard, semi-automatic, or automatic), an arithmetic operation or mixed operations key, and G (to go). Semi-automatic and automatic mode also require the desired response time (1 to 9 seconds) allowed to answer each problem to be entered.

Prior to entering this program, the two slide switches should have been set. You set the grade level (0-3, 4-6, 7-9, or 0-9), while the other selects the number of problems to be presented (10, 25, 50, or 100).

These initial operations should probably be performed by a teacher or parent. From here on, it is all in the hands of the child.

The display shows a problem and the child must enter the answer. If it is correct, a smiling LED face blinks to the right of the completed program. In standard, sequential, or semi-automatic mode, the child must then press the

All Centurion products are housed in an 8" round case x 5" high.

Digitor has green LED characters, ten number keys, nine "programming" keys, and two switches.

It writes, rates, creates, even telecommunicates. Costs less, does more- the Commodore 64.

When Commodore introduced the 64, the industry suddenly realized that there would be a computer in every home, school and business years before anyone ever dreamed.

That's because Commodore 64 halved the price of high technology: while you can compare the 64's capabilities with those of any sophisticated business PC, you can compare its price with that of an average television.

CIRCLE 122 ON READER SERVICE CARD

What can you do with it? Create with its high resolution Sprite Graphics. Add a printer and type with it. Add a disk drive to use spread sheets and other financial programs. Learn and play music through your home sound system on the 64's professional quality music synthesizer.

Add a modem, and hook up with the vast computer networks through your telephone. In short, the Commodore 64 is the ultimate personal computer, at a price you can afford.

COMMODORE 64

green G button to go to the next problem. In automatic mode, the next problem is presented as soon as the selected response time has elapsed, although in all cases a problem must be answered correctly before the machine will go on to the next one.

Indeed, Skillmaster will never display the wrong answer. If the problem is 3 + 2 and the child enters 4, Skillmaster will display 5 with a frowning face. When the child enters 5, the face changes to a smile. According to the instruction booklet, "Seeing the right answer gives you a chance to learn and eliminates wasteful guesswork."

At the end of a set of problems, Skillmaster displays the total number of problems that were correct on the first try. In addition, pressing the T key displays the elapsed time taken to complete the problem set.

We found Skillmaster to be quite motivational, at least as far as anything to do with arithmetic drill and practice, which most kids regard as pretty dull, can be. As far as the timed response modes, kids found the semi-automatic mode less confusing than the fully automatic mode.

A slight limitation to Skillmaster is that all problems must be in the form:

XX operation X = XX

Thus 11+7 is okay, but not 7+11. Also, no answer can be over two digits. Actually, these points are moot, since the largest addition problem in the machine is 9+9; the largest subtraction problem, 18-9; multiplication, 9×9; and division, 81/9.

An excellent aspect of the Digitor products is the outstanding instruction booklet and optional ancillary material. The included 32-page "Learning Guide" contains complete instructions on how to use the machine, learning objectives, rationale of the design, and 16 reproducible masters of activities which complement the use of the machine. Complete instructions are provided for the use of each activity in conjunction with the machine.

Available at extra cost are grade level packets which include appropriate management materials. These include a 16-page management guide, set of 12 pre/post tests with answer keys, class profile folder, individual student progress form, five individual student completion records, a student scheduling wall chart, and a student progress wall chart. All the individual materials are in the form of reproducible masters.

Skillmaster will never display the wrong answer.

The products in the Digitor series are:

- Drillmaster (10 random mixed problems, grades 5+) $139.50
- Superdrill (25 random mixed problems with timing, Grades 5+) $159.50
- Tutor (programmable with timing, grades K-4) $179.50
- Skillmaster (programmable with timing, grades K-9) $199.50
- Grade level packets, $8.70 to $13.25 each.

Versator

Versator is a device for presenting a wide variety of educational exercises. The majority are variations on the drill and practice theme, but some go a bit beyond it.

Outwardly, Versator is similar to Digitor except that it has a cartridge slot in the top, and the keyboard is perfectly blank. Upon turning on the power, the 14-character, green, dot matrix display lights up with "hello" and a smiling face at the right. Pressing any part of the flat keyboard membrane causes Versator to display "insert module."

Mastery Learning Modules are the solid state programs for Versator. Without one of these $59.50 modules, the machine can do nothing. Each module comes in a vinyl booklet that contains a four-page Learning Guide, a keyboard overlay, and a plug-in module. When the module is inserted, Versator reads, "apply keyboard."

You then use the top five pressure-sensitive spots to program Versator. This starts with the operating mode. STUDY repeats each problem until it is answered correctly. TEST does not repeat problems. TRANSMIT and RECEIVE allow two Versator units to up- and down-load programs between them.

The SUBJECT key selects from the one or two subjects on a module and LESSON selects a set of problems within the subject.

Response Mode can be standard (self-paced), semi-automatic (timed response but user presses Go for additional problems), automatic (timed responses and problem presentation), manual (used with word lists), and tachistoscopic (words presented in "flash" form for 1/60th to 3 second intervals).

The Problem Set key allows you to choose 10, 20, or 30 problems. For those modes requiring a response time (or tach time), it is now specified.

As with Digitor, it is recommended that a parent or teacher help out entering the above steps.

There are currently over 50 mastery modules available. The majority are in the areas of reading, language arts, and spelling, although nine are available in mathematics and four in science. We

Versator is used in conjunction with "Mastery Learning Modules," each one of which includes a booklet, keyboard overlay, module, and vinyl binder.

Versator has a 14-character display and touch-sensitive keyboard.

PLATO COURSEWARE MAKES SERIOUS EDUCATION FUN.

Control Data PLATO® courseware brings new excitement to education. Through such action concepts as darts, pinball, hangman and highly interactive graphics and texts, PLATO challenges kids to reach their learning goals. PLATO coaxes and guides students. PLATO rewards them with the feeling of accomplishment.

PLATO courseware is being used in classrooms across the nation. Now you can bring this quality education home. You'll find PLATO lessons at selected retail outlets where quality software is sold.

All PLATO micro courseware is available for the Apple II Plus and Apple IIe. Lessons are also available for the TI 99/4A and the Atari 800.

There are lessons in Math, including Basic Number Facts, Whole Numbers, Decimals and Fractions; Foreign Language vocabulary builders in French, German and Spanish; a Physics lesson in elementary mechanics; Computer Literacy that introduces kids and novices to the computer age; *Computer Concepts that provide a springboard to more advanced computer lessons; and a **Keyboarding lesson that uses the famous Gregg typewriting approach to teach keyboarding techniques.

Widen your child's world. See the entire growing library of PLATO quality courseware at selected retail outlets. Or for information and a free PLATO catalog, call toll-free: 800-233-3784. Or write: Control Data Publishing Co., P.O. Box 261127, San Diego, CA 92126. In California call 800-233-3785.

Warranty available free from Control Data Publishing Co., 4455 Eastgate Mall, San Diego, CA 92121.

* Developed with Continuous Learning Corporation
** Developed with Gregg/McGraw-Hill

PLATO
COMPUTER-BASED EDUCATION

CONTROL DATA PUBLISHING

CIRCLE 142 ON READER SERVICE CARD

"I have been using **TransForm** for all kinds of programming . . . my time has been cut in half . . . this is one of the very few utilities I have never regretted purchasing for one instant."

by Dr. J.C. Gilland
Graphion/Vortex

Whether you are just a beginner, someone reasonably familiar with programming, or a veteran, **TransForm** can help you.

What is TransForm?

TransForm is a better way to write programs in Microsoft BASIC.* It is a structured translator which does away with the constraints of line numbers and the single line IF. It adds the high level structures of the block IF-ELSEIF-ELSE-ENDIF, REPEAT-UNTIL, and ON-GOTO-ENDGOTO—similar to languages like Pascal. Symbolic labels are used (such as "GOSUB @ QUICKSORT"). A very versatile INCLUDE-DECLARE feature has been added to enable you to build a library of the subroutine modules you use every day—write it once, then INCLUDE it. High level, structured code in—ordinary BASIC out. It's that quick and easy.

Now! Three great ways to order TransForm: The TransForm Tutor. Wanting to learn how to write clean, reliable, structured programs? Let the Tutor teach you with its detailed, easy to learn, step-by-step examples and tutorial. **Only $39.95.***

The TransForm Standard. Already familiar with structured programming? The Standard begins with a more complex example (a utility program) so you can dive right in. **Only $39.95.***

The TransForm Expert. Writing complex program series as a professional? The Expert provides the additional utilities of a source code formatter, destination code optimizer (for use with BASCOM* 5.3), and a "REL" file disassembler. Everything you need to master your applications. **Only $39.95.***

Place your order for **the Tutor, the Standard,** or **the Expert** toll free now: **1-800-845-7055.** Direct technical questions to 1-803-244-8174. VISA, MC, COD, company PO, or check accepted. For CP/M.*

*Introductory price.

From the same company that created MCDISPLAY, the powerful display interface for Microsoft BASIC which allows you to develop screen-oriented application packages.

mci Master Computing Inc.

"Practical Solutions Through Technology"
A Division of EDI Technology Companies
11 Regency Hills Drive, Greenville, SC 29615

CIRCLE 160 ON READER SERVICE CARD

Centurion Computers, continued...

tried four modules: Identifying Affixes and Compound Words, Spelling Demons and Unscramble, Mixed Math Exercises, and Systems of the Body I. Each of these could be a feature review, so we will have to limit ourselves to some general comments.

All the modules are very thorough and present the material at a controlled step-by-step pace. The learning objectives are clearly stated although we would have liked to see a suggested grade level or range of grades for the module.

The instructions were generally clear although some parts were not as clear as they might have been. This was particularly true with modules that required something to be marked with the underline symbol.

Since the correct answer to most problems requires several keystrokes which must, of course, be executed in the proper order, we found that most users did not like the pressure of the timed modes; they became nervous and flustered. Thus, we recommend the use of the self-paced modes; these keep track of elapsed response time but users seem to feel more relaxed and tend to score higher.

Of the four modules we tried, the science one, "Systems of the Body" was the least satisfactory. It has the most complicated keyboard overlay and the sparse four pages of instructions did not give us enough background to understand the problems fully. The guide mentions several related textbooks, at least one of which is probably necessary for using this module successfully.

Subject to the limitation of presenting word problems in a maximum of 14 letters, Versator is a nice compact learning device. However, at $299.50 plus $59.50 for each module it wouldn't be difficult to spend $1500 or more in short order. Whether or not it is worth that much, you will have to decide for yourself, but it is certainly worth a look.

Other Products

Centurion also produces five Alphator products. Alphamaster presents drill on vowel sounds, consonant blends, compound words, affixes, syllabication, letter matching, and ordering. For grades K-5, Alphamaster costs $359.50. Similar products are Alphatutor I for grades K-3 and Alphatutor II for grades 3-5 ($299.50 each). Alphaspell provides drill in spelling-related skills and costs $359.50 while Alphadrill provides continuing development of vocabulary skills in the upper elementary grades ($319.50).

For more information, contact Centurion Industries, 167 Constitution Dr., Menlo Park, CA 94025. □

Look over the Rainbow.

Learn Rainbow™ computer-based instruction ends manual labor. No slaving over computer manuals, you learn to use the Rainbow on screen, in minutes, not months.

The Rainbow shows more character, 132 columns instead of the usual 80. So you can screen a 12 month spreadsheet, without losing 6 months.

One of the Rainbow's best features is the service and support from Digital, the world's second largest computer company.

Keyboard is designed with separate function groups and special keys like "HELP", "DO", and "NEXT SCREEN".

The Rainbow's sleek, comfortable keyboard with standard typewriter keypad fits almost anywhere, even on your lap.

Of the hundreds of software applications now available many are Digital Classified and serviced.

Only the Rainbow automatically runs the widest range of the popular 8-bit *and* 16-bit CP/M® software.

After you look over the Rainbow™ personal computer on paper, look over the Rainbow in person. To learn where, call 1-800-DIGITAL or write **Digital Equipment Corporation**, 200 Baker Avenue, Concord, MA 01742.

Not even the world's largest computer company gives you so much. But the second largest does.

digital

© Digital Equipment Corporation 1983
CP/M is a registered trademark of Digital Research, Inc.

LISTM

For the small business owner, school official, club officer, household manager, busy professional—or any active, independent person with a lot to juggle and sort—the ListMaker™ software package is the easiest, most economical way to do the sorting. And eliminate the juggling.

ListMaker information management system will pay for itself by helping you keep on top of your job, your clients, customers or patients. And it will make household, club or school management more efficient than you ever thought possible.

Whether it's listings, labels or letters; names, dates or zip codes; new business prospects, health information or whose engine needs an annual check-up—ListMaker is easy to use and very flexible. It will eliminate all your files and dreary paperwork and leave you more time to be creative and productive.

ListMaker lets you compile information in three different ways: the list file which creates the format you'll need; the data file which stores your list information; and the print file which organizes the data file into the form you want.

ListMaker also sorts and searches for records according to your own specific needs. And the merge-print operation can automatically insert the proper information into your ListMaker form letters.

The how-to's of ListMaker are easy, too. The user's manual is comprehensive, clear and simple to follow step-by-step.

Reader's Digest, the creator of ListMaker, has specialized in information and list management for years. And they've condensed their know-how into this capable program.



SOFTWARE FOR THE

AKER.

Ask your dealer about ListMaker. Hard-nosed software for the one man band.

To order, Call Toll-Free: 800/431-8800 (NY, AK, HI: 914/241-5727).

Warranty information available upon request by writing to: Reader's Digest Services, Inc., Microcomputer Software Division, Pleasantville, New York 10570.

ListMaker is designed for use on the TRS-80® Models I, III, IV and Apple® II, II Plus & IIe.

Please send me ListMaker

☐ I've enclosed $97.50 plus applicable sales tax.
☐ Bill me (subject to credit approval).

Check One:

T30/131 ☐ ListMaker TRS-80, Model I
T34/131 ☐ ListMaker TRS-80, Models III & IV
T31/131 ☐ ListMaker Apple II, II Plus, IIe

Mail to: Reader's Digest Services, Inc.
Microcomputer Software Division
Pleasantville, New York 10570

Name_____

Address_____

_____

Signature_____ Date_____

Sales Tax: NY residents add 4%*; PA residents add 6%*; ME residents add 4%*; GA residents add 3%*; CA residents add 6%*. *Plus applicable local taxes.

Reader's Digest

ONE MAN BAND.

ListMaker is a trademark of The Reader's Digest Association, Inc. Apple is a registered trademark of Apple Computer, Inc. TRS-80 is a registered trademark of Tandy Corporation. Merchandise may be returned in original condition within 30 days of delivery. Contact Reader's Digest first for instructions and return label.

CIRCLE 213 ON READER SERVICE CARD

The Legend of the Pad of Power

Joe Devlin

Add graphics software and PowerPad becomes a graphics tablet.

Once upon a time, around 1982 to be precise, four magical people met in a faraway land known as Georgia. They looked into their crystal balls and determined that the next boom in personal computers would be in the area of educational software for the home. They looked around and saw that, throughout the country, little home learning software of quality and imagination was available. And it came to pass that they created Chalk Board, Inc. for the purpose of rectifying this tragic situation.

The quest for new and novel software proved hard. The more time these magicians spent trying to write enchanting programs, the more frustrated they became with the hardware the software was supposed to run on. To cast their spells on children, to make children want to learn with computers, the Georgians had to communicate with the kids.

Now, children are interesting creatures, very different from you and me. Even children who know the alphabet don't always have the manual dexterity required to use a computer keyboard. They don't understand bar code readers very well. And, although kids can learn to use light pens and screen-oriented menus, parents are often uneasy when their children stand for hours in front of color televisions and poke at the screens with sharp objects.

The magicians pored over their books of spells and almost emptied their bags of tricks. What they wanted was an input device that was flexible, sturdy, easy to use, inexpensive, and portable. It should be large enough to sit on a child's lap and sturdy enough to take childish abuse. It should be portable enough for a child to carry around, and it should have a cable long enough to allow the child to use the device while sitting on a couch or on the floor near the TV. They concluded that if they wanted a piece of hardware to fit their needs, they would have to conjure it up themselves.

Thus, Chalk Board, a company founded to produce software, ended up creating hardware to meet its software goals. Because the device they created is a pad of great power, they named it PowerPad. Its power is such that children and adults alike will soon be found curled up on couches throughout the land entranced by its spell. Its utility is such that many programs are being written to make use of the magic it wields.

The Magic Begins With The Hardware

The magic of PowerPad is that it is a tabula rasa. Thus, it can be set up as the input device for an infinite variety of software. With a change of software and a flip of a plastic overlay, PowerPad can go from being a graphics pad to being a piano keyboard.

The pad retails for $99.95. For this you get the large (17" by 20") off-white pad complete with a big slot of a carrying handle, cabling to hook the contraption up to any Commmodore 64, Vic-20, or Atari computer, and a user's manual.

The software required to use the pad must be purchased separately. The cabling that comes with PowerPad will not work with the IBM PC or with the Apple II. Hooking the PowerPad up to an Apple or an IBM computer requires the additional purchase of a $49.95 starter kit. This kit includes both the software and cables required by these two computers.

At the heart of the pad is a touch sensitive membrane invented by some of the Chalk Board people. This membrane lies in the 12" by 12" working area in the

PC Saver line cord. Filters power impurities—prevents costly computer errors.

Power line associated problems are estimated to cause 70–90% of IBM PC and PC-XT malfunctions (according to PC Magazine, March 1983). That's true for other computers as well.

AC Line Noise Confuses Software

Line noise can confuse your computer, causing it to misread, misinterpret or misunderstand your instructions. Or it can cause your computer to lose data, scramble programs, and corrupt files, stored programs.

Surges and Spikes Damage Hardware

Transient pulses streaming down the power line into your computer (as many as 4,000 times a day) caused by electrical devices like air conditioners, copiers and refrigerators, fluorescent lights even distant lightning, they can damage the PC's internal power supply, reading or costly circuitry.

Fits Most Personal Computers

Simply install your computer's power with the KMW PC Saver. It fits the IBM PC and PC XT, all Apples, DEC, Radio Shack, Compaq, and many non-IBM personal computers that have grounded outlets.

Only $39.95 at your local dealer.

For the name of the dealer nearest you in the United States, New York residents add applicable sales tax. VISA and MASTERCARD accepted.

Kensington Microware Ltd.
251 Park Avenue South, New York, NY 10010
(212) 475-4600 Telex: 236406 KMW UR

PC Saver. Total Insurance

PC Saver's security system filters the power cord. It guards both against line spikes from the wall current and those generated by devices in your own circuit. Protected by the same unit that...

Any type of interference, noise, surges and spikes are stopped by a sophisticated MOV (Metal Oxide Varistor) system.

KENSINGTON MICROWARE

CIRCLE 117 ON READER SERVICE CARD

middle of the pad. Along any horizontal or vertical line there are 120 switches. The resulting 100 switches per square inch give the PowerPad the highest resolution of any touch-sensitive device I have seen.

One of the most unusual features of the PowerPad is its ability to respond to more than one point of contact at a time. Most touch-sensitive input devices can register contact with only one point at a time. PowerPad can determine that it is being touched in several places at once through the use of the 14,400 digital switches

Drawing on PowerPad with a wooden stylus produces detailed images.

beneath the surface. As a result, you can press your whole hand down on PowerPad and produce an image of the hand on the computer screen.

By itself, the hardware is just another example of a nice graphics tablet in a market that is rapidly becoming crowded with such devices. But there is more. Chalk Board is also producing a library of software and removable membrane overlays that completes the process, turning the product into something that dazzles.

By redefining the pad as a keyboard for particular applications and by producing individual overlays that guide the user through the use of this new keyboard, relatively complex things can be done easily. The size, location, and function of each key is determined by the software designer. The programmer is not stifled by the fixed spacing of a normal keyboard.

Each overlay can be imprinted with a distinct arrangement of color coded areas that serve as both menu and function keys. Pressing one of the mylar squares activates the function controlled by the software and indicated by the markings on the plastic overlay.

As software and mylar overlays are changed, the PowerPad can become in turn a keyboard arranged alphabetically so as not to confuse children, or a keyboard with extra large keys for those whose eyes have dimmed. Musicians can have a piano keyboard, with every key functional. The multiple registration feature allows musical chords to be played on the PowerPad instead of the single notes possible on most graphics tablets.

Software Weaves Its Spells

The Chalk Board software, dubbed Leonardo's Library, will eventually include more than 30 software packages, spanning six subject areas (visual arts, music, mathematics, science, language arts, and social studies) and five levels of difficulty. Not all the software available for PowerPad will come from Chalk Board. Other firms are currently converting software for the PowerPad or writing new software that makes full use of the capabilities of the product.

Chalk Board plans to make each software package they offer available for the Commodore 64, Vic-20, Atari, IBM-PC, and Apple II computers. Obviously, because of profound differences between the capabilities of these machines, the power of the software will reflect the strengths and limitations of the machine it is written for. Software for the Commodore and Atari computers will be in cassette format. IBM and Apple computers will make use of disk-based software.

Each software package will include a tough plastic overlay that is imprinted with function buttons and a manual describing several learning activities. Prices for software will range from $24.95 to $49.95. There will be at least three software packages available initially.

creative computing

HARDWARE PROFILE

Product: PowerPad

Type: Graphics input device

System: Atari, Commodore 64, Vic-20, Apple, IBM

Format: 12" by 12" graphics tablet

Specifications: 4.5 lb. graphics tablet with a 12" by 12" working area. 100 points per square inch resolution. Tablet can respond simultaneously to several points at once.

Ease of Use: Good

Documentation: Mylar overlays are packaged with all software to guide the user. Manuals packaged with PowerPad and all allied software are well written. $99.95 for Commodore 64, Vic-20 and Atari computers. $149.90 for IBM and Apple computers.

Overall Mark: Excellent

Manufacturer:
Chalk Board, Inc.
3772 Pleasantdale Rd.
Suite 140
Atlanta, GA 30340

Summary: A flexible input device with a few limitations.

Finger "painting" is also possible — and any image is easily duplicated elsewhere on the screen.

The *MicroMaestro* is a music package that turns the PowerPad into a fully functional two-octave music keyboard and synthesizer. It will retail for $24.95.

Leo's Logo will retail for $49.95. As its name implies *Leo's Logo* will use the PowerPad to bring the Logo language to the child. The third software package is a graphics tool called *Leo's 'Lectric Paint Brush*.

Leo's 'Lectric Paint Brush

Leo's 'Lectric Paintbrush is a graphics package that retails for $24.95. It is a good example of the kind of software that Chalk Board is planning to release. Getting started is easy. Insert the software cartridge into the back of the computer, plug the PowerPad cable into the computer, snap the mylar overlay into place on the working surface of the PowerPad and *Leo's Paintbrush* is ready to use.

There are 21 symbols printed on the top of the overlay. Most noticeable are the color keys on the top right. There are



Some of the keys printed on the plastic keyboard that comes with Leo's 'Lectric Paintbrush are easy to understand. Others are more cryptic.

OF ALL THE THINGS YOU BUY, HOW MANY ARE GOOD ENOUGH TO BE WARRANTED 5 YEARS?

Few disks stand the test of time. Because few are built to the precision standards or certified to the critical levels of Omni's complete line.

Each Omni disk is rated for 12 million passes without disk-related errors or significant wear. Each is certified error-free at a minimum of twice the error-threshold of your system. And built to exceed all industry specifications including those of ANSI, ECMA, ISO and virtually every drive manufacturer. So you can count on them for the long haul. We guarantee it.

Call toll-free (800 343-7620) for your nearest dealer. In Mass., call 617 799-0197.

Omni Resources, 4 Oak Pond Ave., Millbury, Mass. 01527

Dealers. Software houses.

Check our prices, services and specifications. We offer duplicating, formatting, private labeling, small minimums, fast delivery and copy protection schemes on disks for virtually any system.

OMNI

THE DISK GOOD ENOUGH TO BE WARRANTED 5 YEARS

CIRCLE 271 ON READER SERVICE CARD

eight labeled colors—black, white, red, cyan, purple, green, blue, and yellow. Touch any of the color keys and a musical note emanates from the TV speaker letting you know that you have chosen a color. Touch the keyboard with your finger and a spot of colored light appears on the screen. Slide that same finger across the surface of the pad and a line appears on the screen.

You are free to draw with one finger or many. The pad responds best to slow, even motions. One of the limitations of the program is that it uses only eight colors, in spite of the fact that some of the computers it will run on have more colors available.

If the line produced by your finger is too broad you can use a blunt stylus to get a finer edge. The finest line I was able to achieve on a Commodore 64 was about the width of a matchstick. Using the PowerPad with the IBM PC or another computer with better resolution should produce better results.

Many of the other keys on the mylar membrane are as self explanatory as the color keys. For example, hitting the Background key followed by a color key will change the background color. The Pen Up and Pen Down keys are used to indicate which points are being pressed on the membrane. Hit Pen Up, and a tiny ink-filled pen appears on the screen letting you know where you will begin drawing when you hit Pen Down. If you touch more than one spot at the same time, the pen will jump from spot to spot on the screen indicating all the various points of contact.

Press Pen Down and you activate the paint brush; the little pen point disappears and in its place a small dot appears. You are now in drawing mode.

The Fill key is used to fill in solid objects on the screen. Again, its operation is logical. Position the pen on the space you want to fill, hit the Fill key followed by the color you want to fill it with. Voila! The object fills with color. The Fill key will fill any closed-in space. If there is a hole, even a miniscule one in the object, the color will leak out of the object, like water from a broken vessel, filling not only the object but the rest of the screen as well. If this happens, hit the Cancel key to stop the overflow of color, and you can resume your artwork.

The functions of some of the other keys are less apparent than those of the color keys. For example, Asterisk and Hashmark keys serve as general function keys to do such things as calling forth the memory grid. The functions of two keys labeled To and End may also be a puzzle to the uninitiated. The fact that the End key is emblazoned with a flag did not help to clarify matters for me.

These two functions have been borrowed from the Logo programming language. The To and End keys are used to indicate the starting and ending points of the definition of an object. Once an object has been defined, it can be moved about or copied to other parts of the screen. To start the operation, first hit the To key. Next draw the object—say, a red circle. Hitting the End key tells the computer you have finished drawing the circle.

The PowerPad is a flexible input device that will stimulate the imaginations of programmers.

Defining objects uses up a great deal of computer memory. To find out how much space you have left, you can call a bar graph onto the screen to indicate the amount of memory space left by hitting the asterisk key.

The number of objects that can be saved depends on the computer with which the PowerPad is used. For example, up to nine objects can be defined within the memory of a Commodore 64. Hitting the Clear and Asterisk keys together undefines all objects, thus freeing memory and giving you space to define new objects. The screen does not change when this is done. The red circle remains on the screen. Undefined objects do not disappear but they cannot be moved or duplicated again.

Once objects have been defined you can do several things to them. Any object that has been defined can be repeated anythwere on the screen or moved from its original location to a new location simply by hitting the Repeat or Move key, touching the object you wish to move, and then touching the spot to which you want it to go.

Objects can be saved on disk or cassette. Since there are no alphanumeric keys on the membrane, the objects are named by using the color function keys. Thus, you could name one object "black-green-red" and another "blue-yellow."

Limitations

The PowerPad is a flexible input device that will stimulate the imaginations of programmers—even those who don't come from the mystical land of Georgia. The product does have a few limitations, however. A flat membrane keyboard cannot provide as much comfort or tactile feedback as a full stroke keyboard would provide for an adult.

Although the PowerPad case is quite sturdy, the mylar overlay is more fragile. Sooner or later someone is bound to cast his spell with a ballpoint pen or scissor point. The wise folks at Chalk Board have forseen this problem and are making overlay replacements available for $6.00.

In short, the people at Chalk Board seem to know what they are doing. And so the wizards from Georgia presided over a happy marriage of hardware and software. And they lived happily ever after. The end. □

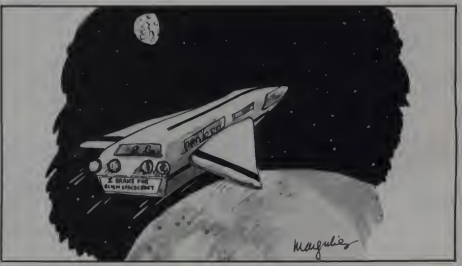

RESTON TURNS COMPUTER LEARNING INTO CHILD'S PLAY

Today, learning about computers is part of growing up. And two new books from Reston take kids beyond arcade-style shoot-'em-ups and into real computer programming. **Rainy Day Activities for the Atari™**, by Nancy Mayer, is designed to introduce younger children to computer fun. **Kids and The Atari™**, by Edward H. Carlson, takes 10-14 year-olds from the fundamentals to complete mastery of BASIC programming. Both feature lively illustrations and simple writing to let kids use them by themselves—with special notes to let parents and teachers help out.

Reston Publishing Company™
A Prentice-Hall Company

11480 Sunset Hills Rd.
Reston, VA 22090

Available at your local bookstore and computer retailer or call us at **(800) 336-0338.**

Atari is a registered trademark of Atari, Inc.

CIRCLE 216 ON READER SERVICE CARD

SAIGON:
THE FINAL DAYS
Vietnam, 1975. Crashing through the dense jungle foliage, you hear the distant fire of the NVA camp guards. You've escaped, but you have a long way to go before you reach Saigon — if you ever do. Uncle Sam is pulling out, and Saigon holds your only hope of ever going home.

SAIGON: THE FINAL DAYS

By Jyym Pearson, Robyn Pearson & Norman Sailer

Gritty realism and historic fact blend to form a unique adventuring experience that plunges you into a controversial chapter of recent history.

Visit your local dealer *today*, or call us for your copy!

800-327-7172

Available for your 16K TRS-80 Model 1 or 3, in either tape or disk format, for only $24.95.
The Atari tape version (needs 16K) is $24.95.
The Apple version has great full-color hi-res graphics for $34.95.

Adventure International
A DIVISION OF SCOTT ADAMS, INC.

BOX 3435 • LONGWOOD, FL 32750
(305) 862-6917

148

CIRCLE 104 ON READER SERV...

Photo by Paul Grubo...

Houston Instrument HiPlot DMP-29 Plotter

David H. Ahl

In most cases, the lead-in to a review leaps to assert itself. In some cases the product has one or more outstanding characteristics that beg to be mentioned; in others, the company is strange or unusual; in still others, the reviewer has some biases that just must be put on the table.

In the case of this review, all are operative. Here are three possible lead-ins:

• Houston Instrument is an inward-looking company. They have spent nary a dime on advertising with *Creative Computing* even though plotters are high on the list of peripherals that many readers wish to purchase. They rarely send out a press release; and when they do, it is certainly not to us. We always make a point to stop by their booth at NCC, but we are usually made to feel like dolts by the engineers at the booth who speak an obsure dialect of English called Plotter-Speak.

Plotters represent a vast, untapped resource for artistic expression.

• For many years, Houston Instrument has been making a line of plotters know as HiPlot. They have gone their merry way, designing one innovation after another into their plotters, until today, the DMP-29, little-known and little-heralded, is one of the most advanced, user-friendly, and cost-effective plotters on the market.

• In the early 70's, I worked for Digital Equipment Corporation as manager of the Educational Products Group. To help users of computers in educational institutions, I wrote a series of booklets called Basic Applications Programs—(Subject). One was on plotting. It described how to use two plotters, the TSP and Fasplot, with PDP-8 Basic.

Among other things, I wrote a simu-

DMP-29 Plotter measures 22" × 19" and produces plots on sheets up to 11" × 17".

lator in Basic which would make the plotter execute the turtle graphics portion of a virtually unknown (at the time) language called Logo. When Logo became more widely known, I asked some of my friends at DEC about my simulation routines. Alas, they had gone the way of other blue sky projects and had long since been forgotten and tossed out.

It was just as well. I was up to my eyeballs in other things and could ill afford to get hooked on plotters again as I once had been. Nevertheless, I still have a fond place in my psyche for plotter graphics. I am appalled at what many people do with plotters. I feel that plotters represent a vast, untapped resource for artistic expression, and should be the computer peripheral of choice after a disk drive



Plotter has RS-232 ports built in; Centronics and IEEE-488 ports are available as options. Up to 9600 baud can be set with the dip switches.

A Friendly Package

The Houston Instrument DMP-29 plotter is a flat bed plotter; this means that the sheet of paper lies on a flat surface and the pens move in two directions to trace a plot upon this surface. In contrast, on a drum plotter, the paper is wrapped around a drum and the pens move across the paper while the drum rotates to produce a two-dimensional plot.

On the DMP-29, the bed accommodates a piece of paper measuring 11" × 17". It is possible, in either hardware or software, to select a half-size plot measuring 8 ½" × 11". On a full-size plot, the plotting area is 10" × 15" and on a half-size plot, 7" × 10". The paper is held in position by a lip on the plotter bed at the bottom and by permanent strips of adhesive tape at the top.

All the manual plotter controls are on a touch sensitive front panel similar to the control panel on a microwave oven or an Atari 400 computer. There are 14 controls arranged in seven groups.

This may sound like a complicated set of controls, but it is really quite straightforward during normal operation. The first group of controls contains the power on/off switch, reset (clears memory and resets the plotter), load (pen moves to a corner to facilitate paper loading), and chart size (toggles back and forth between a small and large chart). For normal plotting, these are the only controls that will ever be used.

"Select enable" lets the plotter respond to computer input. When the plotter is powered up, this is on. LED indicators show the status of this and the remaining controls, as well as five other aspects of the plotter.

Two buttons select either remote or local operation; on power-up, remote operation is the default mode.

The remaining controls are used for local mode and digitizer mode. Two buttons raise and lower the pen. while a nine-button keypad is used to move it manually about the plotting surface.

On the rear of the plotter are two RS-232 connectors, a male marked "Modem," a female marked "Terminal," and a dip switch with eight switches to select communications characteristics.

Connecting to a Computer

The instructions with the plotter suggest that "any standard DB 25-pin flat

The DMP-29 has its own plotting language which is elegant and powerful.

ribbon cable can be used to connect the serial RS-232C interface to a computer." Maybe so, but this approach did not work on any of the four computers we checked out with the DMP-29. In desperation, we tried a "reverse connection" cable and it worked fine.

The computer must be connected to the modem port (male) of the plotter. Although the pin-outs have the same description as those on the computer (Pin 2 is transmit data, Pin 3 is receive data, Pin 4 is request to send, Pin 5 is clear to send and so on), the lines must be reversed. In other words, Pin 2 goes to Pin 3 and 3 to 2, Pin 4 goes to 5 and 5 to 4, and Pin 6 goes to 20 and 20 to 6. Pin 1 (protective ground) and Pin 7 (signal ground) are tied together. We made up a cable to provide these exchanges, but such cables are available from suppliers such as Wireworks Corp. (DC9-2, 9-cond male/male, #810937).

With this reversed cable, we were able to run the plotter from a TRS-80 Model III, TRS-80 Model 100, NEC 8201, and Apple II. Presumably, it will work with any computer with a serial RS-232 output port.

The rear panel dip switch may be set to any of six baud rates (300, 600, 1200, 2400, 4800, or 9600), parity (even, odd, or none), and metric or English incremental steps. Data word format is always eight bits with two stop bits.

Typically, the first command in a plotter program written in Basic will be:

```
OPEN xxx FOR OUTPUT AS 1
```

in which xxx is the communications specification. On the NEC 8201, for example, the specification would be "COM:6N82XN". This means 2400 baud (6), no parity (N), eight bits (8), two stop bits (2), and XON enabled (X). The final character, N, does not matter to the plotter. We found 2400 baud to be an ideal operating speed; at slower speeds, the plotter occasionally had to wait for data while at higher speeds, the buffer frequently filled up.

The DMP-29 may be ordered with one of two optional interfaces: Centronics-compatible parallel or IEEE 488 GPIB.

Producing a Plot

At the left side of the plotter bed are eight pen holders. Each one holds a hard-nibbed pen in one of eight colors: black, red, magenta, orange, light green, dark green, blue, and brown. These pens are included with the plotter. Each has a nib protector which must be removed when it is inserted in the holder. Optional fiber tip and drafting pens are available.

The plotter can use almost any type of paper, although a highly-polished paper (or mylar) produces better plots than a porous or rough paper. A wide variety of quadrille, chart, and graph papers are available from Houston Instrument as well as independents such as Dietzgen, K & E, Charrette, and Bienfang. We tried several and got excellent results.

Whatever you need to do with your IBM Personal Computer...

Our book/software series can show you how.

Programming the IBM Personal Computer: UCSD Pascal
Saymour V. Pollack
A self-paced introduction to UCSD Pascal (and programming) on the Personal Computer, using the UCSD p-System. Many examples and problems, both serious and whimsical.
Book/Diskette Package: 1983, 323 pages, $34.95
ISBN 0-03-063978-8

Using the IBM Personal Computer: Wordstar
CJ Puotinen
Even for those unfamiliar with the Personal Computer, this book's many examples and projects will easily lead to mastery of the *Wordstar* word processing system.
Book/Diskette Package: 1983, 272 pages, $34.95
ISBN 0-03-063981-8

Using the IBM Personal Computer: Visi-Calc
Robert Crowley
Learn Visi-Calc step-by-step on your Personal Computer; work on projects—some easy, others not—in a wide range of application areas.
Book/Diskette Package: 1983, 256 pages, $35.95
ISBN 0-03-063982-4

Programming the IBM Personal Computer: Fortran 77
Robert Rouse and Thomas Bugnitz
Examples, problems, and exercises from science and engineering illustrate both introductory and advanced topics, including IBM's Fortran compiler.
Book/Diskette Package: 1983, 240 pages, $34.95
ISBN 0-03-063979-4

Programming the IBM Personal Computer: BASIC
Naill Graham
From switching your Personal Computer on to editing text, handling random and sequential files—even making music—this easy-to-follow book shows you how.
1982, 291 pages, $17.00
ISBN 0-03-063667-1



Programming the IBM Personal Computer: COBOL
Naill Graham
A spiral development and a wealth of sample programs lead you step-by-step into all features of the IBM Personal Computer's version of COBOL.
1983, 400 pages, $18.95
ISBN 0-03-060538-5

Your IBM Personal Computer: Use, Applications, and Basic
David E. Cortesi
An elementary, non-threatening introduction to the Personal Computer—set-up and testing, disk files, Visi-Calc and other software, and the rudiments of BASIC.
1982, 253 pages, $17.00
ISBN 0-03-063671-X

Programming the IBM Personal Computer: Pascal
Naill Graham
Accessible to beginners, this structured presentation shows how to program with the powerful compiler Pascal developed by IBM for the Personal Computer.
1983, 256 pages, $16.95
ISBN 0-03-061982-3

Programming the IBM Personal Computer: Organization and Assembly Language Programming
Mark A. Franklin
Examples and problems help you understand your Personal Computer at its most basic level. Master DOS, I/O, and interfacing while maximizing speed and flexibility.
1983, 400 pages, $19.95
ISBN 0-03-062862-8

PC WRITERS—Let me know your book/software ideas. —Brete Harrison, Editor, CEPP, 829 Sonoma Ave., Suite 5, P.O. Box 1180, Santa Rosa, CA 95402; (707) 544-4448.

ORDER BY PHONE . . . USE OUR TOLL-FREE 800 NUMBER! (800) 227-1617 ext. 326 (in California, (800) 772-3545 ext. 326)

CBS
EDUCATIONAL & PROFESSIONAL PUBLISHING
383 Madison Avenue, New York, NY 10017

IBM is a registered trademark of the International Business Machines Corporation. Wordstar is a registered trademark of Micropro. Visi-Calc is a registered trademark of Visicorp. UCSD p-System is a registered trademark of the Regents of the University of California.

CIRCLE 121 ON READER SERVICE CARD

MAIL THIS COUPON TODAY!
To: Deborah Miters
CBS Educational & Professional Publishing
383 Madison Avenue, New York, NY 10017
PLEASE SEND ME (check ISBNs of items desired):
For each order, please enclose the price, 75¢ handling, 5% for shipping, and applicable sales tax. Or ☐ we will bill you, or charge your ☐ VISA ☐ Mastercard.

NO. _____ EXP DATE _____
SIGNATURE _____
NAME _____
COMPANY _____
STREET _____
CITY _____ STATE _____ ZIP _____
Offer valid in USA only; prices subject to change without notice

BOOK/DISKETTE PACKAGE
☐ 0-03-063978-8 (UCSD Pascal)
☐ 0-03-063981-8 (Wordstar)
☐ 0-03-063982-4 (Visi-Calc)
☐ 0-03-063979-4 (Fortran)

BOOK
☐ 0-03-063667-1 (Basic)
☐ 0-03-060538-5 (Cobol)
☐ 0-03-063671-X (Use/Basic)
☐ 0-03-061982-3 (Pascal)
☐ 0-03-062862-8 (Assembler)

PCT

WRITE IT.
PROOF IT.
SEND IT.

THE WORD JUGGLER™ SYSTEM FROM QUARK.

If you're serious about word processing on your Apple IIe or Apple III, you should test the Word Juggler System from Quark. Integrated tools that combine ease of use with extraordinary power.

WRITE IT WITH WORD JUGGLER.

The anchor of the system is Quark's Word Juggler word processor, a program that lets you easily perform the most intricate editing tasks. For example, you can delete characters, words, even paragraphs with just a single keystroke. You can instantly copy, move or delete entire blocks of text. Then display or print your document by simply pressing a key.

And there's virtually nothing to memorize. Because editing and formatting commands are always right there on the keyboard. Word Juggler for the Apple III comes with special templates which identify principal word processing functions. On our version for the IIe, the editing commands are labeled on easy-to-install, replacement keycaps.

Plus, Word Juggler lets you generate form letters from existing mailing lists, because the program has a built-in interface with both PFS:File and Apple's Quick File.

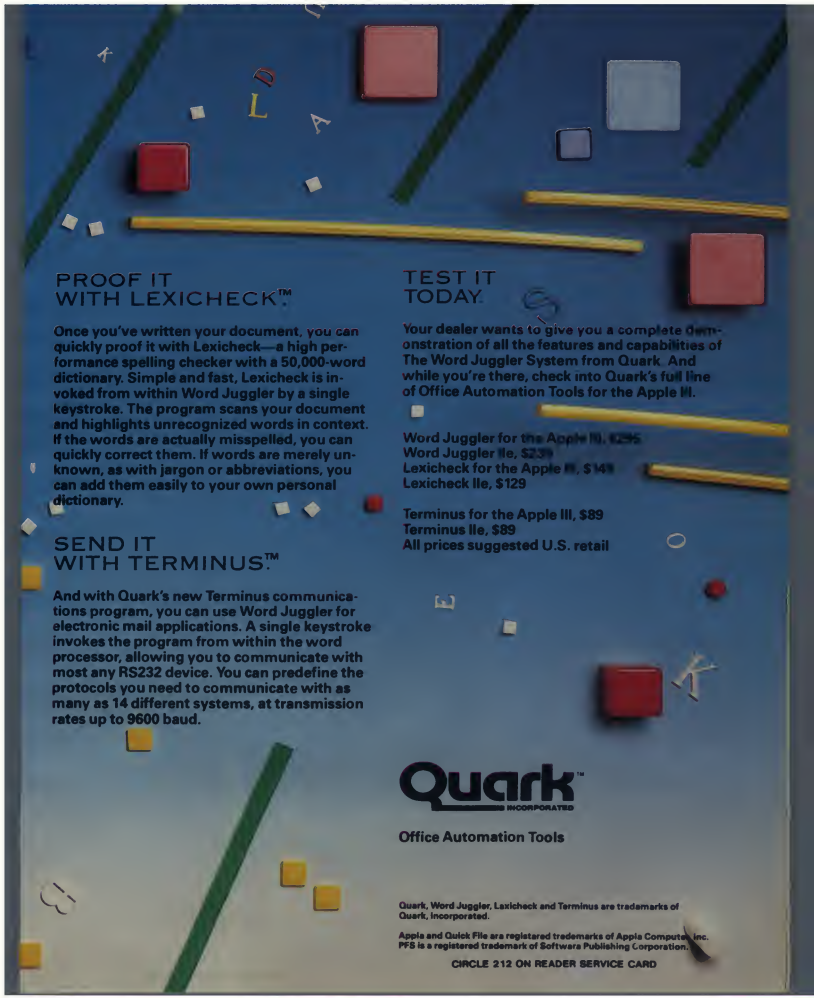

PROOF IT WITH LEXICHECK™

Once you've written your document, you can quickly proof it with Lexicheck—a high performance spelling checker with a 50,000-word dictionary. Simple and fast, Lexicheck is invoked from within Word Juggler by a single keystroke. The program scans your document and highlights unrecognized words in context. If the words are actually misspelled, you can quickly correct them. If words are merely unknown, as with jargon or abbreviations, you can add them easily to your own personal dictionary.

SEND IT WITH TERMINUS™

And with Quark's new Terminus communications program, you can use Word Juggler for electronic mail applications. A single keystroke invokes the program from within the word processor, allowing you to communicate with most any RS232 device. You can predefine the protocols you need to communicate with as many as 14 different systems, at transmission rates up to 9600 baud.

TEST IT TODAY.

Your dealer wants to give you a complete demonstration of all the features and capabilities of The Word Juggler System from Quark. And while you're there, check into Quark's full line of Office Automation Tools for the Apple II.

Word Juggler for the Apple IIe, $239
Word Juggler IIe, $239
Lexicheck for the Apple IIe, $149
Lexicheck IIe, $129

Terminus for the Apple IIe, $89
Terminus IIe, $89
All prices suggested U.S. retail

Quark™ INCORPORATED

Office Automation Tools

Quark, Word Juggler, Lexicheck and Terminus are trademarks of Quark, Incorporated.

Apple and Quick File are registered trademarks of Apple Computer, Inc. PFS is a registered trademark of Software Publishing Corporation.

CIRCLE 212 ON READER SERVICE CARD

Eight colored pens are held in pen holders at the left of the plotting bed.

The plotter has two operational modes. The first allows the plotter and computer to communicate using the XON/XOFF protocol and requires very little in the way of handshaking. When the buffer is full (512 bytes) the plotter indicates to the computer with a code 13 to stop sending (XOFF). When the buffer is half empty (256 bytes), an XON (Code 11) is sent. This is normally the preferred mode of operation.

Alternatively, Mode two lets you replace the XON/XOFF mode with your own handshaking, delay loops, and user-specified prompt codes. While you theoretically can gain some speed by using Mode two, it is considerably more complicated in programming and recommended only for serious users who want to control everything in sight.

The DMP-29 has its own plotting language which is elegant and powerful. The simple sequence of a semi-colon followed by a colon (;:) activates the plotter. Once the plotter is selected, it responds to everything sent over the communications channel until a deselect (@) or reset (Z) command is sent. Upon receiving the select command (;:), the plotter automatically selects Pen 1 as part of the initialization routine.

If you want a pen other than Pen 1, you simply send Pn, where n is the number of the pen you want. T selects the self-test routine. This tests the logic circuits of the plotter and causes it to draw the self-test plot which uses all the pens and all the functions. The self-test can also be selected manually.

Pen up is selected by U and pen down by D. An H causes the plotter to go to the home position (0,0) in the lower left-hand corner of the paper. The command O causes the plotter to specify the current pen location as the origin of your plotting system.

The plotter normally assumes a full-size plot; half-size is specified by the command EF. If you have specified half-size and want to get back to full-size plots, the command EH will do it. These commands override any that have been set manually on the plotter front panel.

The plotter normally draws continuous lines. However, if you want any of nine varieties of dotted line, they can be specified by the command Ln (n=1 to 9).

The pen may be positioned with respect to an absolute set of coordinates (A) or relative to the last point plotted (R).

To draw a line, you simply specify the x and y coordinates of the start point and end point that you want drawn. For example,

```
;:HAD0,600600,600600,00,0U
```

will cause the plotter to be selected, go to the home position, specify absolute positioning mode, lower the pen, and then draw a square of 600 units on a side.

To draw the same square using relative positioning would require the following:

```
;:HRD0,600600,00,-600
-600,0U
```

In a sense, relative positioning is very similar to the turtle geometry commands in Logo although, of course, angular measures are not implemented.

In the absence of any specifications, the plotter uses step sizes of 0.005 inches (200 steps per inch). In other words, a full size (10″ × 15″) plot with 0,0 at the bottom left corner would have a maximum x value of 3000 (15″ × 200 steps) and a maximum y value of 2000 (10″ × 200). Step size may be changed with the command ECn in which n is 1 for 0.001″, 5 for 0.005″, and M for 0.1 mm (metric).

For some plots it may be desirable to specify the velocity of pen movement. In the absence of this command, the pen moves at two inches per second. However, it may be specified at 1, 2, 4, 8, or 16 inches per second (or one of five metric speeds).

Windows, Functions, and Symbols

An amazing feature of the DMP-29 is

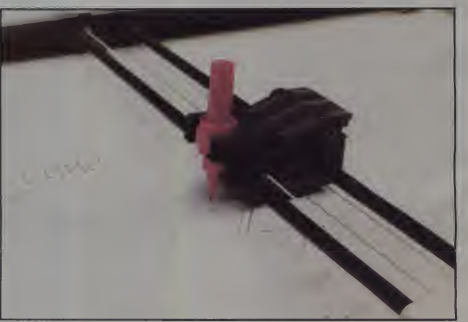

Pens move in step sizes of 0.001″, 0.005″, or 0.1 mm and at one of five different velocities.

DYNACOMP

The Leading Distributor Of Microcomputer Software

PRESENTS

APPLE™
ATARI™
CANON AS-100™
COMPUSTAR™
HEATH/ ZENITH Z-100™
IBM-PC™
KAYPRO II™
MORROW DESIGN™
NEC™
NORTHSTAR™
OSBORNE™
PET/CBM™
SUPERBRAIN™
TRS-80™
CP/M DISKS DISKETTES

DYNACOMP

HOME FINANCE	
PERSONAL FINANCE SYSTEM (ALL)	$ 39.95
TAX OPTIMIZER (ALL)	$ 59.95
MICROCOMPUTER STOCKS (ALL)	$ 59.95
MICROCOMPUTER BONDS (ALL)	$ 59.95
BUDGET MODEL ANALYZER (ATARI)	$ 23.95
PERSONAL BALANCE SHEET (OSBORNE)	$ 29.95
STOCK MASTER/STOCK PLOT (APPLE)	$ 59.95
NYINDEX (ATARI)	$ 29.95
STOCKAID (ATARI)	$ 29.95
PORTFOLIO MANAGEMENT (APPLE/OSB)	$ 69.95
INVESTING ADVISOR (TRS)	$ 39.95
INVESTMENT MANAGEMENT (ATARI/IBM)	$ 49.95
OPTIONS ANALYSIS (TRS/OSB/APPLE)	$ 99.95
BUSINESS	
FINANCIAL MANAGEMENT (NORTH STAR)	$149.95
MAIL MASTER (ATARI)	$ 39.95
PAYFIVE (APPLE)	$149.95
LIFE CYCLE ANALYSIS (APPLE)	$ 39.95
DATA RETRIEVAL SYSTEM (ATARI/CPM)	$ 29.95
OPTIMAC (TRS/APPLE)	$ 43.95
BOOKKEEP (CPM)	$ 69.95
CUSTOMER PROFILE (OSBORNE)	$ 59.95
EDUCATION	
HODGE PODGE (APPLE/TRS)	$ 18.95
CHILDREN'S CARROUSEL (APPLE)	$ 19.95
TEACHER'S AIDE (ALL)	$ 17.95
TEACHER'S GRADE BOOK (APPLE)	$ 49.95
PLAYER PIANO (ATARI)	$ 19.95
SPELL IT (APPLE)	$ 19.95
ELIZA II (ALL except APPLE)	$ 19.95
PROBABILITY (APPLE/ATARI)	$ 39.95
TYPEMASTER (TRS)	$ 18.95
FEELING BETTER (APPLE)	$ 39.95
FROGMASTER (ATARI)	$ 21.95
DISKETTES	
5¼" SS/SD with hub rings, packed in plastic storage box (10/box)	$ 19.95

CARD GAMES	
BRIDGE MASTER (ALL)	$ 29.95
GIN RUMMY (APPLE)	$ 22.95
POKER PARTY (ALL)	$ 23.95
BLACKJACK COACH (ALL)	$ 33.95
EUCHRE (ATARI)	$ 19.95
WAR GAMES	
LEIPZIG 1813 (ATARI)	$ 33.95
SHILOH 1862 (ATARI)	$ 33.95
IRONCLADS (CPM)	$ 29.95
ADVENTURE	
CRANSTON MANOR (CPM)	$ 19.95
WINDMERE ESTATE (NORTH STAR/APPLE)	$ 29.95
ZODIAC CASTLE (NORTH STAR/APPLE)	$ 29.95
STARSHIP LANDING PARTY (TRS)	$ 19.95
GENESIS-THE CREATOR (APPLE)	$ 49.95
VALLEY OF THE KINGS (ATARI)	$ 29.95
GAMES	
VALDEZ (ALL)	$ 23.95
FLIGHT SIMULATOR (ALL)	$ 23.95
BACKGAMMON 2.0 (ALL)	$ 23.95
MANAGEMENT SIMULATOR (ALL)	$ 29.95
CHESS MASTER (CPM/TRS)	$ 23.95
STARBASE 3.2 (ALL)	$ 17.95
CACTUS LEAGUE BASEBALL (ATARI)	$ 19.95
FINAL ASSEMBLY (ATARI)	$ 19.95
ENGINEERING/STATISTICS	
DIGITAL FILTER (ALL)	$ 53.95
HARMONIC ANALYZER (ALL)	$ 33.95
BASIC SCIENTIFIC SUBS. Vol. 1 (ALL)	$ 53.95
BASIC SCIENTIFIC SUBS. Vol. 2 (ALL)	$129.95
BASIC STATISTICAL SUBS. (ALL)	$ 99.95
CELESTIAL BASIC (APPLE)	$ 49.95
ACTIVE CIRCUIT ANALYSIS (ALL)	$ 43.95
BEAM DEFLECTION (ALL)	$ 39.95
ANALYSIS OF VARIANCE (ALL)	$ 43.95
PRINCIPAL COMPONENTS (APPLE)	$ 49.95
STATTEST (ALL)	$ 33.95

PRICES ABOVE ARE FOR 5¼" SINGLE DENSITY. ADD $3.00 FOR DOUBLE DENSITY, $2.50 for 8"

THESE ARE ONLY A FEW OF THE HUNDREDS OF PROGRAMS IN THE DYNACOMP LIBRARY.

Besides being the leading distributor of microcomputer software, DYNACOMP currently distributes software in over 60 countries. DYNACOMP provides FRIENDLY, ACCESSIBLE CUSTOMER SERVICE through our highly qualified and knowledgeable staff. WE'RE AS NEAR AS YOUR TELEPHONE.

DYNACOMP'S prices are highly competitive and we promise prompt processing of every order!

WRITE FOR A FREE, DETAILED CATALOG

Daytime Toll Free Order Phones:	*24 Hour Message and Order Phone:*	*Office Hotline:*
(800) 828-6772 (800) 828-6773	*(716) 442-8731*	*(716) 442-8960*

DYNACOMP, INC.

1427 Monroe Avenue • Rochester, NY 14618

CIRCLE 281 ON READER SERVICE CARD

Sirius Is GIVING AWAY Over $35,000.00 In VIDEO GAMES!!!

You Can Win A Sirius Game OF YOUR CHOICE!

Correctly answer the questions below to qualify for the FREE GAME DRAWING.

Enter all of the Grud Quizzes and qualify for all 20 drawings!

GRUD QUIZ #3: TYPE ATTACK

1. **What is the first word that attacks in level two?**
2. **How many points do you get for typing a correct letter?**
3. **What happens when you run out of energy?**
4. **What happens when letters touch the line at the bottom of the screen?**

TO ENTER:

Just send a postcard or 3 x 5 piece of paper to Sirius containing the following information:

1. Your name and address
2. The Grud Quiz number and your four answers

RULES:

1. All entries must be handwritten and individually mailed.
2. All entries must be postmarked by midnight, February 29, 1984.
3. Only one prize per person per quiz is permitted.

1,000 WINNERS!

If ALL of your answers are correct you will qualify for that Grud Quiz drawing. 50 winners per quiz will be randomly chosen and notified by mail on or before March 31, 1984. Each winner will receive a complete Sirius catalogue listing from which they can select the game or games of their choice.

LOOK FOR MORE GRUD QUIZZES in the Oct., Nov., and Dec. issues of your favorite computer magazines or at participating software retailers.

ALL CONTESTANTS WILL RECEIVE A FREE FULL COLOR SIRIUS COMIC CATALOGUE

Sirius™

Sirius Software, Inc.
10364 Rockingham Drive
Sacramento, CA 95827

(VOID WHERE PROHIBITED BY LAW)

CIRCLE 224 ON READER SERVICE CARD

called the Window. This is defined as an area of a plot that you wish to reproduce or scale. A single command specifies the upper left and lower right limits of a window. Whatever plot data are in this area will then be reproduced in another area called the Viewport, also defined by the upper left and lower right limits.

Moreover, if the Viewport is a different size or shape from the Window, the plot will be automatically scaled to fit. Thus, if you have a plot of a circle with a square Window around it, and you specify a large rectangular Viewport, the new plot will become a large ellipse. This pair of commands opens up a world of possibilities.

Anyone who has used a plotter is familiar with the equations for a circle, ellipse, and arc, and probably has a favorite curve-fitting method, since these plotting techniques are so frequently needed. However, all are built into the software of the DMP-29. A circle is plotted with the command CC x,y r, where x and y specify the center of the circle (which may be off the plotting surface) and r specifies the radius. The commands to produce an ellipse and arc are similar.

The DMP-29 can be used as a digitizer input tablet.

The general curve plot requires you to specify only the high and low points of a curve, although the plotter will not object to more points being specified. The plotter then calculates and plots the best fit line between your points.

Letters, numbers, and 30 ASCII symbols can be reproduced on the DMP-29 in any of nine heights (0.07" to 1.12"), and in any of four degrees of rotation (0, 90, 180, and 270) by using a single command.

If you want to get even fancier, an extended text command is available. This command accepts up to six parameters which specify character height and width (255 alternatives), normal or italics, character set (only one is available at present), and the degree of rotation (0 to 360 degrees).

Six marker symbols are also available for marking points on a graph, axes, and boundaries. Like the ASCII symbols, these can be plotted in nine different sizes.

Digitizer Mode

In addition to acting as a plotter, the DMP-29 can be used as a digitizer input tablet. In this mode, the plotter transmits x,y point data to the computer for processing. The computer must be programmed to receive two five-digit coordinates, followed by a carriage return.

After the digitize command (ED) is received by the plotter, the plotter bed is your "pad," and the pen is the cursor. You maneuver the pen using the nine directional movement keys on the keypad. When the pen is set correctly, you press REPORT, and the coordinates are sent to the computer.

Documentation

The DMP-29 plotter comes with an 82-page manual. It is marked "Preliminary," but apparently the final one is not yet available. As computer peripheral manuals go, it is neither the best or the worst.

In its favor, most of the plotter commands are adequately described and examples are given. On the other hand, the examples stop far short of producing "real" plots with axes and labels. Furthermore, all the example commands are listed as LPRINT XXX, whereas most computers use PRINT #1 to send information to the RS-232 port.

The section on interfacing the plotter to a computer should mention that most computers will require a reversed cable, and that a pin-to-pin cable will not work.

Nevertheless, with a bit of patience and experimentation with the pen in the up position, the manual enabled us to draw some interesting plots in an hour or so.

In Summary

The DMP-29 plotter is an amazing piece of engineering. The wide variety of built-in commands make it easy to draw complicated and exotic plots. The general curve-fitting feature is especially useful for producing graphs. Also useful are the ten types of dotted lines and six marker symbols.

For computer artwork, the DMP-29 boasts many valuable features including automatic reproduction and scaling of plots, easy resetting of the pen origin, and absolute or relative pen positioning. The three step sizes and five pen velocities allow either "quick and dirty" or extremely detailed plots. Repeatability with the same pen is quoted as 0.004" and with a different pen, 0.008"; we found that these slight inaccuracies were not noticeable on most plots.

The ability to use the DMP-29 as a digitizer is a nice extra. The documentation with the plotter is fair, but would benefit from some longer examples of "real" plots. All in all, the DMP-29 is exceptionally versatile, user-friendly, and cost effective. □

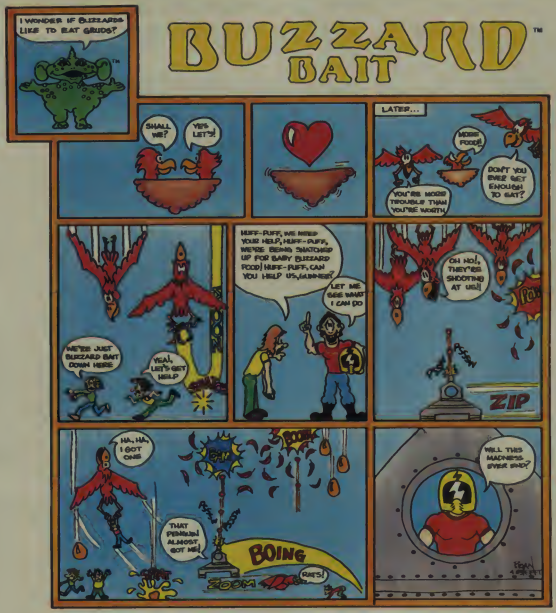
I WONDER IF BUZZARDS LIKE TO EAT GRUBS?
BUZZARD BAIT
SHALL WE?
YES, LET'S!
LATER...
MMM! FOOD!
DON'T YOU EVER GET ENOUGH TO EAT?
YOU'RE MORE TROUBLE THAN YOU'RE WORTH.
WE'RE JUST BUZZARD BAIT DOWN HERE
YEAH, LET'S GET HELP
HUFF-PUFF, WE NEED YOUR HELP, HUFF-PUFF, WE'RE BEING SNATCHED UP FOR BABY BUZZARD FOOD! HUFF-PUFF, CAN YOU HELP US, MINER?
LET ME SEE WHAT I CAN DO
OH NO! THEY'RE SHOOTING AT US!!
ZIP
HA, HA, I GOT ONE
BOP
THAT PEMBA! ALMOST GOT ME!
BOING
ZOOM
WILL THIS MADNESS EVER END
© 1983 Sirius

Sirius™

For more information contact your local Sirius dealer or contact Sirius directly at 10364 Rockingham Drive, Sacramento, CA 95827; (916) 366-1195.

Apple II, II + & IIe Disk
IBM-PC Disk

Game design by Mike Ryeburn.
IBM-PC version programmed by Uriah Barnett
Package, program and audio visual © 1983 Sirius Software, Inc. All rights reserved

Sirius and Buzzard Bait are trademarks of Sirius Software, Inc. Apple II, II + & IIe are trademarks of Apple Computer, Inc. IBM-PC is a trademark of International Business Machines Corp. Sirius is not affiliated with Apple or IBM

CIRCLE 225 ON READER SERVICE CARD

NEVER BEFORE COULD YOU MANAGE SO MUCH DATA FOR SO FEW DOLLARS

Base1™ gives you

No-Limit Flexibility

- ✲Unlimited number of records
- ✲Unlimited record size
- ✲Unlimited number of fields
- ✲Unlimited field size
- ✲No requirement to define formats or data before entry
- ✲Fast data access through special indexing
- ✲Data structure accessible in BASIC
- ✲Quick and easy field reorganization
- ✲Space saving compression utility
- ✲Full variable length processing
- ✲Virtual information facility
- ✲Index on any list of fields

Base 1™ requires 32K memory

(special buffering is provided for larger memory systems)

Base1™ is a database for

- ✲IBM Personal Computer (PC DOS)
- ✲Apple II, IIe and III (Apple DOS)
- ✲TRS-80 (TRS-DOS)
- ✲Osborne (CP/M)
- ✲CP/M systems
  (8" SSSD 3370 format)

Base1™

A Data Manager From

XPERSYSTEMS

Software to rely on

$19.95

Visa/MasterCard

CALL NOW (800)USA-3333

FREE media, shipping and handling on first 1,000 orders.
(normally $6.95 or $9.95 for 8" media)

CIRCLE 270 ON READER SERVICE CARD

Pennsylvania residents call **800-292-9660** and add sales tax.

IBM is a registered trademark of International Business Machines. Apple is a registered trademark of Apple Computer Inc. TRS-80 is a registered trademark of Tandy Corporation. Osborne is a trademark of Osborne Computer Corp. CP/M is a registered trademark of Digital Research, Inc.

The Olympia Electronic Compact Printer

Will Fastie

Every day, great strides are made in dot-matrix printer technology. The capabilities of such machines are constantly on the rise, while the quality of their printing gets ever better. Nonetheless, the print quality of fully formed impact printers is still superior to the majority of dot-matrix machines. The boom in small computer sales has created a new market for low-cost, letter-quality printers. The Olympia Electronic Compact is one such product.

What makes the Electronic Compact most interesting is its keyboard. To the naked eye, the device looks like an electronic typewriter. That is an accurate assessment, because the only difference between it and a typewriter is the provision it makes for either a serial or parallel computer interface.

This "combination" printer must be examined in both its roles to understand fully its capabilities and limitations. However, the basic characteristics of the unit are the same in either case and will be examined first.

General Characteristics

Specifications for the Electronic Compact are given in the Hardware profile.

A quick glance at the machine shows it to have all of the standard typewriter features. The keyboard layout is reasonable, with the keys for tab and margin settings on the right, out of the way of the QWERTY key area. The left side of the keyboard includes a margin release key and switches to set pitch (10, 12, and 15), line spacing (1, 1-½, and 2), and print density (i.e., how hard the paper gets hit, three settings). Also included is a correction key.

Directly above the keyboard is the margin scale. Each of the three pitches has its own independent scale. Plastic slides can be moved to indicate the actual margin settings, although their position does not actually affect the setting.

Will Fastie, Suite 211, World Trade Center, Baltimore, MD 21202.

The margin scale is transparent; behind it is a position indicator that lights when the power is turned on. The indicator on the tested machine seemed to be offset a little from the actual position of the typing element, but in practice it can be adjusted by loosening a screw and sliding the lamp to the right or left.

It is hard to decide whether or not the Electronic Compact is a satisfactory typewriter.

The cover, which includes the margin scales, snaps off to reveal the carriage mechanism. This gives access to the ribbon, the correcting ribbon, and the printwheel, all of which are relatively easy to install and remove. Installation of the cartridge ribbon is especially easy, as the ribbon guide rises and moves slightly forward, thus releasing the tension and allowing the ribbon to slip easily away from the carriage.

On the top of the machine is a cover which, when lifted, becomes a paper support and guide. I assume that the primary reason for allowing the guide to fold down is to allow the entire machine to be protected with the supplied vinyl cover, although some measure of dust protection is provided by the guide.

The power cord plugs into the left side of the printer. The power switch is located just forward of the plug. Although the placement of the switch is convenient, the power cord tends to get in the way. A better location would have been on the rear. Just above the power switch, also on the left side, is the platen knob; there is no knob on the right.

On the top right of the machine are two levers. One moves the paper bail and other retracts the friction rollers and displaces the paper bail by about 3mm.

The machine comes with one printwheel which can be used at either 10 or 12 pitch. It looks best at 12, and can even be pushed to 15 pitch without too much character overlap. The printwheels are Olympia (as opposed to Qume or Diablo) and were not listed in any of the catalogs I checked. They can be ordered direct from the manufacturer.

The Typewriter

It is hard to decide whether or not the Electronic Compact is a satisfactory typewriter. The test machine was used extensively for this purpose by a variety of typists. While all preferred it to a manual typewriter, none preferred it to an IBM Selectric or other standard office machine.

The keyboard has a nice feel and is easy to use. Placement of the keys is standard except for the correcting key, which is appropriately placed next to the backspace key. It is not difficult to figure out how to work the machine.

There are two major irritations with the typewriter that all typists were quick to spot and complain about. First, it does not remember the margin and tab settings when it is turned off. When turned on, it assumes margins of 20 and 85 (set for 10 pitch) with no tabs. We used it mostly in 12 pitch, so this setting was particularly irksome. One of the secretaries who tried the machine to do a complicated table was infuriated when she innocently turned the machine off over lunch, only to lose 21 tab settings.

The second problem is more psychological. Every one of the typists who tried the machine felt that it lagged behind their keystrokes. There is a noticeable delay (most of us felt it was a half-step) between the striking of a key and the impression of the character. The result is strike-print-strike-print-strike in a steady rhythm. The effect is to create the illusion that you are typing too fast, and the tendency is to slow a bit. None of us could get over this problem and none of us reached our normal typing speeds on the machine.

We were also interviewing secretarial applicants and giving typing tests; after comparing the same applicant's results on both the Olympia and a Selectric, we were forced to make a speed allowance for the former.

The Printer

As a computer peripheral, the machine again has its problems. Most irritating is that there does not appear to be a way to set up the machine under computer control. Margins, spacing, and tabs must be set manually.

Registration is another problem, although here I may be too severe with my criticism. I am used to the very high precision of the Diablo 630 and have not had an opportunity to compare the registration of the Olympia with other printers in its price range. Overall, the precision of the machine is good, but periodically its line spacing varies.

Creative Computing

HARDWARE PROFILE

Print Speed: 11 characters per second

Power Requirements:
220 volt / 50 Hz
115 volt / 60 Hz (U.S.)

Power Consumption: 50 watts

Printwheel: Olympia 96 character

Ribbon: Olympia Carbon Cassette

Correcting Ribbon: Standard (i.e., IBM or equivalent)

Carriage:
Platen Length: 346 mm (13.6 in)
Writing Line: 292 mm (11.5 in)
= 115 characters at 10 pitch
= 138 characters at 12 pitch
= 172 characters at 15 pitch

Dimensions:
Width: 492 mm (19.4 in)
Depth: 383 mm (15.1 in)
Height: 150 mm (5.9 in)

Weight: 9 kg (20 lbs)

Price: $999

Address:
Olympia USA Inc.
1625 Adrian Rd.
Burlingame, CA 94010

The tested machine was equipped with a parallel interface so it could be used with an IBM PC. The standard unit comes with a serial interface. I do not know how the serial cable is connected, but the parallel cable (a ribbon cable) was threaded through the air vents on the rear of the machine. To do this, two posts were broken from the vent to make enough room to allow the passage of the cable. This seemed somewhat inelegant.

The Documentation

The manual that came with the machine is the European version written in English, French, and German. It was bad enough that the English instructions were interspersed amongst the others instead of being separated. What was worse was the picture of the keyboard with a chart explaining the functions of all the keys. The keyboard pictured is the European version with symbolic legends instead of the English legends that actually appear on the keyboard.

The documentation could be improved by printing a photograph of the U.S. keyboard and by organizing the book so that all the instructions in a particular language are together.

Summary

If I had to make a recommendation for a printer, I would not recommend the Electronic Compact. If I had to make a recommendation for a typewriter, I would pass again. But if the requirement was for both on a limited budget, I would give the Olympia a serious look. □

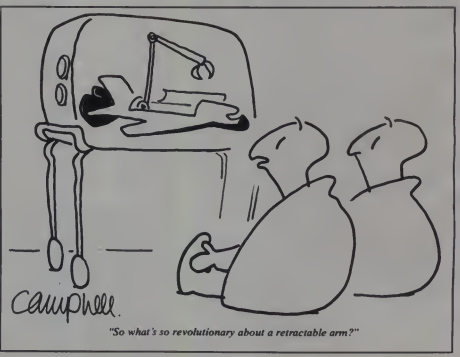

"So what's so revolutionary about a retractable arm?"

Businesspak+

Glenn A. Hart

The new Radio Shack Model 100 portable computer is a wonderful tool for the travelling executive. Its full size keyboard, large 8-line by 40-column display, built-in modem and cassette, parallel and serial interfaces make it a flexible and powerful tool that can be used almost anywhere.

This fine hardware is combined with excellent software included with the Model 100. Stored in ROM and always available, an easy-to-use text entry program, Microsoft Basic interpreter and scheduling and note taking programs are quickly learned and quite flexible. Nevertheless, there are enhancements to the Radio Shack software that would provide even greater utility for the executive.

The first third party software for the Model 100 addresses exactly these needs. Designed specifically for the businessman, *Businesspak+* is a package of six programs from Dallas-based Portable Computer Support Group which adds tremendous flexibility to the Model 100 while retaining the ease of use of Radio Shack's own software.

The programs employ both the Basic built in to the Model 100 and machine language calls to the ROM routines provided by Radio Shack. While PCSG is not related to Radio Shack in any way, the geographic closeness has evidently led to a corporate closeness as well. PCSG claims to have "torn apart" the Model 100 ROMs, and judging from the way the programs operate, they have done their job well.

The six programs in the package include a text formatting program to expand the built-in text entry program into a complete word processor, an excellent expense account maintenance program which includes many aspects of a spreadsheet, a screen-oriented data entry program which allows designing custom entry screens and maintains data in consistent internal formats, a sort utility to arrange such organized data files, a graphics program to generate pie, bar, and line graphs, and a marvelous Telex/ECOM program which provides access to the wide range of telecommunications services through these professional networks from the Model 100!

Glenn A. Hart, 51 Church Rd., Monsey, NY 10952.

creative computing

SOFTWARE PROFILE

Product: Businesspak+

Author: Michael Stanford

Type: Business

System: TRS-80 Model 100

Format/Language: Basic and machine

Performance: Excellent

Ease of Use: Extremely easy

Documentation: Excellent

Price: $89.95

Summary: Excellent business software that extends the utility of the Model 100 ROM software.

Overall Mark: Excellent

Manufacturer:
Portable Computer Support Group
1105 Harry Hines Blvd.-Suite 207
Dallas, TX 75229
(214) 351-0564

Write+ Word Processing

The PCSG "word processor" uses the standard text entry program supplied with the Model 100. As Model 100 owners know, the text entry program is easy to learn and simple to use, yet flexible enough for nearly any reasonable text manipulation.

The PCSG program formats text when printed. Two methods are used to indicate the user's formatting desires. A special text file called W+SPEC.DO stores default values for various standard printing options (see Table 1). This file can be edited to change the default values. The other method is to imbed commands in the text file itself to instruct the formatting program to take special action. As in many other such programs, the traditional "dot command" concept is used. A period in the leftmost column indicates a command, and the letter which follows specifies the exact action desired. The PCSG program uses only a single character; the letter codes chosen are as related to the function called as possible (see Table 2).

The functions provided are quite comprehensive and allow many standard word processing features such as justification (with extra spaces only, no proportional printing), centering, headers and footers, page numbering, and adjustment of indentation and margins. The command syntax is so easy that there is very little learning time required—an important consideration for the executive target audience.

Control characters can also be imbedded anywhere in the text file (not only at the beginning of a line) to control special printer capabilities like underlining, boldface, etc. The method is identical to that used in *WordStar*, i.e., a CONTROL-P imbeds the next character, which is then sent directly to the printer when the file

Smith-Corona makes a successful printer even better. Introducing the TP-II.

When Smith-Corona® introduced the TP-I™ daisy wheel printer, it filled an important need. It gave home users and small businesses the opportunity to have high-quality letter-perfect printing at the lowest price to that time. No wonder it's been such a success!

Now, Smith-Corona improves upon that success. With the TP-II™ printer.

The TP-II has all the features of the TP-I. It's compatible with most microcomputers. It handles letter and legal sized paper. There's an optional tractor feed for handling fanfold paper.

Dual Interface

But the TP-II has some significant improvements, as well. It can interface with both serial and parallel computers. Which means you can upgrade your computer whenever you want without having to buy a new printer, too.

Letter-Quality Printing

The TP-II has the same excellent print quality as the finest office typewriters. There's a choice of easy-to-change daisy wheels to give you a wide variety of print styles and languages. (At $7.95 each, you can easily afford several.) There is a new ASCII 93-character printwheel with all the characters necessary to print out computer program listings, as well as printwheels in seven foreign languages.

Self-Testing

The Self-Test Switch lets you automatically print out a test pattern to check on the TP-II's operating condition. You can easily set DIP switches for baud, parity and character bit length. Plus it offers carriage return line feed, as well as a new 256 character buffer.

800 Number for Information

Add to all these features the fact that the TP-II is made in America by a company that has earned a reputation for reliability. A company that backs its printers (and everything else it makes!) with a national factory service network and an 800 number you can call if you have a problem.

So if you're in the market for a high-quality, low-cost daisy wheel printer, consider the one that's improved upon success. The Smith-Corona TP-II.

Please send me more information on the Smith-Corona TP-II daisy wheel printer.

Name_____

Address_____

City_____ State_____ Zip_____

Mail coupon to:
Smith-Corona, 65 Locust Avenue
New Canaan, CT 06840

CC-10

Smith-Corona

Smith-Corona is a trademark owned by SCM Corporation.

is printed. The current version of Write+ is designed for parallel printers, which is the normal output port for the Model 100. A serial printer version would not be hard to program, and PCSG will probably add this capability in a future release.

While it certainly lacks many functions, the PCSG program generates printed output which is much more attractive than the simple-minded Radio Shack output routines. All functions worked exactly as described in the excellent documentation. Output on both a daisywheel printer and several dot matrix printers was truly impressive and fully business quality. This is a first-rate program that almost justifies the cost of the entire software package all by itself.

Expns+ Expense Report Generator/Spreadsheet

Travelling executives use a wide variety of methods of keeping track of expenses. While scrupulous notes certainly work, a final report must still be prepared, and some of the complex books or electronic alternatives are almost always more trouble than they are worth. Expns+ is different. It is very easy to use, extremely flexible and prepares a well formatted final report.

The program uses text files to store report headings, expense categories, and period designations like the day of the week, date, or whatever. Up to 18 categories and 12 periods can be handled, more than enough for most applications. The user can modify any of the text entries to customize the program for his needs.

Expns+ first asks which data file to access; the user can maintain many different ones if desired. A time period is chosen, e.g., Wednesday, and then the 18 expense categories appear on the display. Moving the cursor to one and hitting ENTER clears the screen and shows any previous entries in the category for that period, and also allows entering new expenses. Up to 18 entries can be made in each category for each period. The bottom of the display shows cumulative expenses for the period and in the expense category.

Each numeric entry can be followed by a one character "note." Each category can accommodate its own set of notes, so a lower case *a* in the Tips category is distinct from an *a* note to Breakfast. The meaning of each note is stored in the text file and prints out on the final report as a footnote. During data entry, a function key scrolls all notes which have been entered into the text file in case the user has forgotten the meaning of a note or which one should be used.

Expns+ has a Replication feature which allows a constant expense to be copied into a succession of cells. A multiplier value can be specified to grow or decrease the amount by a constant. This is very useful to help convert Expns+ into a simple spreadsheet program rather than simply storing expenses. PCSG includes a model for corporate budgeting and provides ample instructions on how to use the program as a spreadsheet. While the program does not contain many of the useful functions found in a *SuperCalc*-type program, rather sophisticated what-if analysis, forecasting, and other typical spreadsheet applications are easy to implement.

Expns+ does a wonderful job of tracking expenses.

Table 1. Variables Stored in W+SPEC.DO File.

Lines Per Page
Line Length
Top Margin (number of lines)
Bottom Margin (number of lines)
Left Margin (column)
Right Margin (column)
Printing Lines Per Page
Header Text (%D gives Date, %T Time, %P Page Number)
Footer Text
Header Switch (1=Header On, 0=Header Off)
Footer Switch (same)
Format (Normal, Justified, Centered)
Line Spacing
Start Printing at Page Number N
Last Page Number to Print
Number of Beginning Page in Document
Number of Copies
Pause Between Pages (1=yes, 0=no)
Output to what Device

Table 2. Write+ Imbedded Dot Commands.

.Ln	Set left margin to n
.Rn	Set right margin to n
.J	Justify right margin
.N	Ragged right margin (normal)
.C	Center all text
.Un	Move paper Up n lines (skip lines)
.P	Start a new page
.Fn	Footer On/Off Switch
.Hn	Header On/Off Switch
.Mn	Start a new page unless n more lines will fit on current page
.Sn	Line Spacing Control

Reports can be generated at any time and look like a spreadsheet created with *VisiCalc*, *SuperCalc*, or the like. Expns+ handles reports too large to fit on one page just as these other programs do; multiple pages are created which can easily be spliced together.

Expns+ does a wonderful job of tracking expenses. I used it to store expenses on a ten-day trip starting the day after I received the software, and I have never used a better system. I'm sure I would have forgotten some minor expenses if I were using written notes, and program operation was so intuitive after a few minutes that using the Model 100 to store expenses was actually fun!

Graph+ Graphics

Graph+ creates pie, bar, and line graphs from data entered with the Expns+ expense program. Since Expns+ can be used as a spreadsheet as well, the combination can plot any desired data. The main heading entered with Expns+ is centered over the graph; the other headings follow. Labels are used as appropriate and are also obtained from the Expns+ file. Either row or column values can be plotted. Pie charts are fixed to a three-inch diameter, while bar and line charts can be any horizontal or vertical size that will fit the paper in use.

At present, Graph+ works only with Radio Shack's Model DMP 100 matrix printer. While this is a reasonable choice as a companion to the Model 100, many users may have other matrix printers. By the time this article appears, Portable Computer Support Group should be providing either customized versions or instructions on how to use other printers.

I don't have a DMP 100, but Graph+ worked perfectly when I tried it at a Radio Shack store. The program is so easy to use that executives should be able to spice up their printed output with graphs even without knowing anything about the sometimes complex and confusing world of computer graphics.

Put+ And Sort+

The Put+ program works much like programs like *DataStar* and other data entry utilities. It is easy to define an entry screen to collect up to 16 data fields. The user can select prompting messages and specify the permissible length of each field, as long as everything fits on one display screen (no multiple screen forms are possible).

When the program is invoked, the user selects which screen file to work with. The Model 100 display fills with prompts and entry fields indicated by

solid blocks of the appropriate length. As data are entered, the down arrow key is used to move to the next data field and RETURN stores the data into memory. This is a bit annoying, since it is more intuitive to hit RETURN after each field. I would prefer a control character to accept the entire screen of data (Control-W for Write?), but it appears that PCSG tried to stay away from control characters in general, probably thinking that executives wouldn't feel comfortable with them.

In any event, the entered data are stored to RAM in a fixed position format. While examining the created file is confusing, since the fields don't appear to be lined up due to the Model 100 word wrap, the fixed format allows the companion Sort+ utility to sort the data on any field, either alphanumeric or numeric.

The operating method Sort+ uses is quite similar to Put+, which makes the combination easy to learn. When Sort+ is first invoked, the desired file is chosen and the same display screen used to enter the data with Put+ appears on the display. The user simply moves the cursor to the field to sort on and hits RETURN. The sort proceeds quite quickly. With either utility, the file created can be saved to cassette and/or retained in RAM.

Both programs work as advertised, and can be quite helpful if reasonably large amounts of data are to be manipulated with the Model 100. I tend to think, however, that this is not a primary use for this computer, and with smaller data lists it isn't too hard simply to use the text editor and be sure to maintain consistent formats. Nonetheless, Put+ and Sort+ work well and could be useful to some users.

Telex+ Telecommunications

Telex+ provides access to many of the telecommunications services offered by Western Union's Telex service, but without the need for a dedicated Telex line. Even more remarkable, the same program can be used to send the Postal Service's new ECOM computer mail. An ECOM is similar to a MailGram, but is delivered within two days of entry. ECOM messages cost much less than MailGrams and have similar impact. Since the program is designed for large volume users, the Post Office requires the user to send at least 200 ECOMs at a time, which pretty much lets out the small microcomputer user. As we shall see, however, the PCSG program lets you send even one, which is actually cheaper than a stamp, envelope, and paper!

The Telex+ program depends on Action Telex Inc., a special Telex "service bureau" company based in Dallas with offices in 14 major US cities. The PCSG package include a free trial of the Action Telex service. The user calls PCSG and is given a temporary ID number which allows sending three Telex or ECOM messages. Thereafter, he must subscribe to Action Telex, which cost $150 a year with no minimum monthly billing. This may seem like a lot to someone not familiar with Telex, but it is actually a bargain given that a dedicated Telex line alone costs $50 a month.

Sending a message is simplicity itself.

Sending a message is simplicity itself. When Telex+ is invoked the user is asked to select a text file which has been previously prepared using the normal Model 100 editor. A choice of Telex or ECOM is requested. The program asks for the Telex number (or name and address for an ECOM) of the recipient. A pre-stored default number can be selected if desired. The program then dials the local Action Telex office, sends the message, renames the file by changing the last letter of the filename to X to show it has already been sent, and logs off—all totally automatically. If a printer is connected, the program also generates a hard copy of the message for file purposes.

As if this weren't enough, Action Telex offers a wide range of special services as well. A system called ActionGram can be used to send messages to the UK, Western Europe, Australia, New Zealand, South Africa, Hong Kong, and part of South America, even if the recipient doesn't have a Telex machine. Much less expensive than an international cable, delivery is usually next day, and replies can be prepaid. International Telexes are also accepted, and the system also allows the same text to be sent to multiple domestic ECOM addresses or Telex machines, using Put+ and Sort+ to prepare the mailing list files if desired.

The Telex network can be quite confusing, even to experienced users. Telex+ and the Action Telex services reduce the difficulties to an absolute minimum. The entire system worked correctly the first time I tried Telex, ECOM, and the other services. PCSG should be commended for this excellent program. Many users will soon wonder how they got along without these services.

Summary

To say that I am impressed with the *Businesspak+* package is an understatement. "Human engineering" is rapidly becoming an overused and even trite phrase, but I have rarely seen as much of it in any software package, even ones selling for many times the cost of *Businesspak+*. Not only are all the programs very easy to learn and use, they follow the innate operating procedures of the Model 100 so closely that it is hard to tell where the ROM routines stop and the cassette software starts.

Other aspects of the package are also first rate. The use of Model 100 function keys is excellent, documentation is lucid, to the point, and accurate. PCSG support is friendly and knowledgeable. When I called to get my Action Telex number, I made several suggestions or minor enhancements; a new cassette incorporating all my ideas arrived a couple of days later!

The package is distributed on six cassettes, each containing several copies of each program to insure accurate loading. The Model 100 is developing a reputation for finicky cassette loading, but I had no trouble loading any of the *Businesspak+* programs.

Businesspak+ is one of the few software packages I have ever recommended almost without qualification. Its $89.95 cost is a bargain, and I cannot imagine any Model 100 owner being without it. □



"Don't look now, but I think there's an imposter among us..."

MAXI CRAS

THE CHECK REGISTER ACCOUNTING SYSTEM FOR PERSONAL AND SMALL BUSINESS USE

WHAT IS MAXI C.R.A.S.?

Maxi C.R.A.S. is THE computerized check writing and record keeping system for small business and personal use. But don't take our word for it! Compare it with any other system available for your computer. Read through our manual, and look at the printed reports that Maxi C.R.A.S. produces. Then talk to one of the thousands of people who use it. We're sure you'll agree — Maxi C.R.A.S. is the most versatile system available.

WHO CAN USE IT?

Almost anyone! Maxi C.R.A.S. is designed for people interested in gaining more control over where their money goes. Maxi C.R.A.S. is powerful enough for small business use, yet so easy to use that it's ideal for your personal finances too. It takes the work out of everything associated with a checking account: printing checks, balancing your account, reconciling bank statements, and keeping extremely accurate records. And those accurate records are delivered in the format required for income tax preparation!

BUT WHAT MAKES IT DIFFERENT FROM ALL THE REST?

We're glad you asked! Maxi C.R.A.S. lets you write checks by hand, or it will print them for you automatically. It handles a virtually unlimited number of transactions per month. And to keep track of all that financial activity, Maxi C.R.A.S. supports up to 223 user-defined income and expense accounts. Any transaction can be distributed between one or even all 223 accounts.

The Maxi C.R.A.S. database keeps track of up to 75 addresses, and automatically prints them on the correct checks. Use window envelopes and save the work of addressing envelopes.

I'M INTERESTED. TELL ME MORE.

Organizing the data is just half the story. Maxi C.R.A.S. prints six detailed reports and statements:

Check Register
Check Register Notes
Income and Expense Subtotals
Individual Account Activity Report
Account Distribution Statement (audit trail)
Checkbook Reconciliation Statement

BUT WILL IT WORK WITH MY SPREADSHEET PROGRAM?

For detailed forecasting, budgeting, and analysis, Maxi C.R.A.S. interfaces EASILY with VisiCalc™, Multiplan, 1-2-3, Peachtext 5000, and Supercalc™!

TELL ME ABOUT ITS OTHER FEATURES.

- Easy-to-use Data Entry routine — saves time and eliminates errors. You don't need to be a computer expert to become a Maxi C.R.A.S. expert!
- Notes option can be used to flag tax-deductible items.
- Checkbook balance is constantly updated and instantly accessible. No more embarrassing overdrafts!
- Compatible with hard-drive systems, including XT.
- Fast and easy reconciliation of check register with bank statement.
- Complete, easy-to-understand User's Manual.

Maxi C.R.A.S. — an indispensible tool for managing money most effectively.

THEY LIKED IT!

"We never thought we'd see the day, but here it is. We have published a review of a check register program that made us want to buy one."

Reprinted from a review of Maxi CRAS in the February 1983 issue of Creative Computing magazine. Copyright 1983 Ahl Publishing Company.

CP/M - 8 inch disk	$99.95
IBM PC & XT (2 drives, 80 column display required)	$99.95
Osborne/Kaypro (2 drives, 80 column display required)	$99.95
TRS-80 Model I, III, or IV (48K, 2 drives required)	$99.95
TRS-80 Model II, 12, 16	$99.95

WE INVITE YOU TO COMPARE!

Compare Maxi CRAS with any other system available. We're sure you'll find Maxi CRAS to be the most versatile, easy-to-use check register system available — at any price.

1-800-327-7172

Visit your local dealer or call us toll-free *today*.
(Dealer inquiries are invited!)

THE BUSINESS DIVISION
PO BOX 3435 • LONGWOOD, FL 32750
(305) 862-6917

212

A Subsidiary of Scott Adams, Inc

CIRCLE 106 ON READER SERVICE CARD

creative computing software evaluation

Dow Jones News & Quotes Reporter

Dennis Costarakis

Investors can obtain news, prices, and financial information on their investments easily with the *Dow Jones News & Quotes Reporter* from Apple Computer. This program turns *any* Apple II into a smart terminal with access to a broad range of financial and general news information from the Dow Jones News/Retrieval database service.

The *Reporter* package, which comes in a box suitable for storage on a bookshelf, contains one disk with the program, the operating manual for the program in the standard Apple spiral bound format, and a copy of the Dow Jones News/Retrieval Fact Finder. The Fact Finder is the 198-page Dow Jones publication that provides the instructions and symbols necessary to access and use the various portions of the Dow Jones database. The manuals and program are straightforward and easy to use.

On booting up, the program checks to see whether an 80-column card is installed; if so, the program automatically runs in 80-column format. If you have an Apple IIe, you won't have any problems. But if you have an older 80-column card as I do, you may have to upgrade your 80-column board firmware. If your 80-column card does not support the Pascal 1.1 Keypress function, the program will not work in the 80-column mode. In fact, you must remove the 80-column board from the computer, because the program searches for an installed 80-column card and if a card is found it automatically runs in the 80-column mode. The only way to run in 40-column mode is to remove the 80-column card—a definite nuisance.

I think a professionally programmed package like this could have been programmed to run in 40 or 80 columns, as the user desires, without having to remove the 80-column board. When using the program in the 80-column mode, the lefthand side of the screen (columns 1-40) is used most of the time. The screens of information are not centered on the monitor. In using the program, I suspect this is due more to the way the Dow Jones News/Retrieval database transmits data than to the programming, but perhaps not.

The more quickly you retrieve the data you want, the cheaper it is.

Checking Your 80-Column Card

If you don't know whether your 80-column card supports the Pascal 1.1 Keypress function, you will find out as soon as you boot up this program. With the 80-column card turned on, you see and hear (it ticks like a ticker tape) the title print out a letter at a time. When you press RETURN (as directed by the program) to continue, and the program proceeds to the next "page," you have the Pascal 1.1 Keypress function. If nothing happens when you press RETURN, you must remove your 80-column card and use the program in the 40-column mode until you can upgrade your firmware.

Dennis A. Costarakis, 3562 Union St., San Diego, CA 92103.

creative computing
SOFTWARE PROFILE

Name: Dow Jones & Quotes Reporter
Type: Communications/Financial
System: 48K Apple, modem and interface card, or super serial card, or D.C. Hayes Micro-Modem II auto dial modem.
Format: Disk
Language: Pascal (self-contained on program disk); language card not necessary
Summary: Program for retrieving news and financial information from Dow Jones databases.
Price: $135
Manufacturer:
Apple Computer, Inc.
20525 Mariani Ave.
Cupertino, CA 95014
(408) 996-1010

GET A GRIP ON ROBOTICS WITH SAMS.

Grab onto these Sams Books from Mark Robillard and get a jump on robotics programming.

MICROPROCESSOR BASED ROBOTICS starts by explaining the mechanics of robot hands, arms and legs, and leads into tactile, motion and attitude sensing, even vision systems. Learn system controlling through microprocessors and BASIC programming, plus much more. It's an informative non machine-specific book that is an excellent introductory guide. No. 22050, $16.95.

HERO 1: ADVANCED PROGRAMMING & INTERFACING moves beyond the technical manuals with a series of advanced experiments and applications. Discusses machine and robot language, building and installing both local and remote interfaces, operating system enhancements, and other select programming techniques. No. 22165, $16.95.

Program your own success by ordering these Sams Books today. Call 800-428-3696 or 317-298-5566 and ask for Operator 455.

CIRCLE 220 ON READER SERVICE CARD

SAMS BOOKS AND SOFTWARE

HOWARD W. SAMS & CO., INC.
4300 West 62nd Street • P.O. Box 7092
Indianapolis, IN 46206

HERO 1 is a trademark of the Heath Corporation

Offer good in USA only and expires 2/29/84. Prices subject to change without notice. In Canada, contact Lenbrook Electronics, Markham, Ontario L3R 1H2

AD455

Dow Jones, continued...

If your 80-column card is installed and turned off when you boot up, you will see a blank screen with a cursor in the upper left corner and the "ticking" sound of the program introduction. When it stops, you will still have a blank screen and no use of the program or the computer. Actually, the program is running in the 80-column mode. At first, when this happened, I thought the program was defective because I then booted up another program that worked fine.

I recommended to the project manager at Apple Computer that they include a notice to purchasers that the program will only work as described above. These points are not specifically addressed in the manual, and are only alluded to in the list of equipment table in the back of the manual.

Once the program is booted and the copyright notice appears, note that the package you have is version 2.0, the latest version available. When the RETURN key is pressed to continue (as directed by the program), one of two things happens: either a notice that the program cannot find a communication card appears, or, if you have a modem properly installed, the main menu appears (Figure 1).

You progress through the program with a consistent format. In general, the RETURN key is pressed after each input to proceed to the next step. The ESCAPE key is used to return to the previous screen or display. If you press the ESCAPE key enough times you eventually return to the main menu. Pressing RESET causes the system to re-boot. I was unable inadvertently or deliberately to break out of the program.

It appears to be error trapped extremely well, with one exception. When you attempt to print data from the screen to your printer in the 40-column mode, and your printer is turned on, but is off-line, the program responds with a reminder to turn on your printer. If you are in the 80-column mode and your printer is off-line when you attempt to print, the monitor screen goes berserk, similar to a Fourth of July fireworks display. Placing the printer back on-line and pressing RETURN returns the program to normal operation and prints the last screen of information shown on the monitor. This information is not in the manual.

```
        DOW JONES
NEWS & QUOTES REPORTER

1.  NEWS RETRIEVAL SERVICE
2.  QUOTE SERVICE
3.  ADDITIONAL INFORMATION SERVICES
4.  CUSTOMIZING FEATURES
5.  DISCONNECT FROM DOW JONES
6.  EXIT NEWS & QUOTES REPORTER

ENTER YOUR SELECTION
```

Figure 1.

Automatic Dialing

The Dow Jones News & Quotes Reporter has a customizing feature that allows you to store on disk all the necessary information to dial automatically and log on to the Dow Jones News/Retrieval database. The following information is stored:

- The local telephone number for the network desired.
- An alternate network telephone number if the first is busy.
- Your password (which cannot be read from the monitor—to conceal it from prying eyes. You can safely demonstrate the program without someone borrowing your user I.D.).
- The name of the local area network through which you are connecting (Tymnet, Telenet, or Bell Canada Datapac service).
- Whether log on will be automatic or manual.

Where's the Applause?

You're creative, original, competent.
You've written programs that entertain, educate, organize, analyze.
So where's the applause?

Let us find your audience

That is our business. When we accept a program for publication, we do more than list it in a catalog. We put it in the most effective packaging. We expand its potential with translations for other computers. We devise a competitive marketing strategy. And then our sales staff runs it through a national distribution network.

That's why our programs such as EARLY GAMES are bestsellers. That's how yours could become one.

We will more than find your audience, we will create it. And you'll love the applause.

Submit your programs for review and expect a response within ten business days.

CSI
counterpoint software inc.
4005 west 65 st.
minneapolis, minnesota 55435
612 • 926 • 7888
800 • 328 • 1223

• Whether or not you are using an 80-column card.

• Whether you want to be automatically disconnected from Dow Jones when you aren't actively using the service. This feature will automatically disconnect you after two minutes of inactivity to prevent excessive charges.

Once you have verified the data, they are stored on the program disk for future use. The main menu appears after the customizing data have been saved.

Main Menu items 5 and 6 (Figure 1) allow you to disconnect from the database rapidly and to exit the program when you are done. The program also reminds you to disconnect the phone from the modem and tells you the program has concluded. Items 1, 2, and 3 of the Main Menu allow you to dial directly into that section of the database you desire to use first.

Moving Within Database Sections

Once on line, you can get to either of the other two database sections by returning to the Main Menu via the ESCAPE key and using the menu selection numbers, all while you are on line. It is quite an effective way to move between database sections easily and rapidly. Remember that you are paying for database access time by the minute. The more quickly you retrieve the data you want, the cheaper it is.

The program user manual provides several diagrams that illustrate how the various parts of the program and database are interconnected, how to proceed from segment to segment, and how the ESCAPE key functions to return you to the previous step. The diagrams are simple to read and understand and are a great help in using the News and Quotes segments of the database. They also remind you that help menus are available.

Selecting item 1 (or 2 or 3) of the Main Menu causes the program to dial the local area network automatically (if you customized the program for autodial). The monitor screen identifies each step of the dialing and log on procedure on the screen. Successful log on of the news retrieval mode results in a formatted screen and a request for the Dow Jones symbol of the company for which you want to review the news. The symbols are found in the Fact Finder provided with the program documentation.

If you type AAPL, the symbol for Apple Computer, Inc., the screen then inquires whether you want the latest story or a list of headlines for all the stories in the data bank. The list of headlines may be several pages long. Figure 2 shows what one page of headlines looks like. The two-letter symbols preceding each story are the story identifiers. At this point you can page forward or backward using the left and right arrow keys, obtain a help screen by typing "?," or obtain a story by typing the appropriate two-letter headline code. Figure 3 is an excerpt from one story.

It is that simple to retrieve and have access to thousands of stories in seconds. The news database is updated within 90 seconds of the time that the news appears on the broad tape in your broker's office and is retained in the database for 90 days.

Quote Service

To reach another segment of the database, press ESCAPE several times until you get back to the main menu. (Figure 1). Proceeding to the Quote Service you get another formatted screen. Three inputs are required to obtain a price quote: the symbol of the security (from the Fact Finder); the security type (stock, preferred stock, warrant, when issued, corporate bonds, mutual funds, options, and Treasury bonds and notes); and the exchange or market where security is traded. The left and right arrows here serve two functions: to correct

```
AAPL Headlines
Page 1 of 3
 BC 02/18 PERSONAL COMPUTER NEWCOMERS
    (WJ) FIND BREAKING INTO MARKET HARD
 BB 02/14 HEARD ON STREET  HIGH-TECH
    (WJ) STOCKS BECOMING POPULAR AGAIN
 BA 02/14 TANDY MARKET SHARE DROPS  BUT
    (WJ) FIRM PROFITS IN COMPUTER BOOM
 AZ 02/10 APPLE COMPUTER ASKS ITC TO
    (WJ) INVESTIGATE FOREIGN PRODUCERS
 AV 02/09 VIDEO-GAME MAKERS PREPARE
    (WJ) TO FIGHT COMPUTER INVADERS
 AX 01/27 SCIENCE MANAGEMENT ANNOUNCES
    (DW) SOFTWARE FOR USE WITH LISA
 AW 01/24 SOCIALLY SENSITIVE PORTFOLIOS
    (BN) ARE GAINING IN POPULARITY
 AV 01/24 DISCOUNT COMPUTER SALES GROW
    (WJ) AS DEALERS UNLOAD OVERSUPPLY
 AU 01/21 ANALYSTS - APPLE COMPUTER -2-
    (DJ)
 AT 01/21 APPLE COMPUTER STOCK RISING
    (DJ) ON HIGHER NET, NEW PRODUCTS
 AS 01/20 MAKER OF SCRABBLE TO PUT
    (WJ) BOARD GAME ON APPLE COMPUTERS
```

Figure 2.

```
AAPL Story AT  Page 1 of 2
    01/21 APPLE COMPUTER STOCK RISING
    DJ) ON HIGHER NET  NEW PRODUCTS
    NY -DJ- SECURITIES ANALYSTS SAY
APPLE COMPUTER INC  RECENT STOCK
ACTIVITY IS DUE TO RECOGNITION THAT THE
PERSONAL COMPUTER COMPANY IS STILL A
LEADER IN ITS FIELD
   APPLE ADVANCED 3 2-4 YESTERDAY TO
CLOSE AT 37 3-8 ON VOLUME OF 3 2
MILLION  TODAY DESPITE THE SHARP SLIDE
OF THE MARKET  APPLE IS CURRENTLY
TRADING AT 37 1-4 OFF 1-8 AFTER BEING
AS HIGH AS 39
   ANALYSTS SAY SEVERAL FACTORS ARE
RESPONSIBLE FOR THIS STRENGTH  THE
COMPANY'S FISCAL FIRST QUARTER EARNINGS
OF 40 CENTS A SHARE  WERE A PLEASANT
SURPRISE FOR WALL STREET  ACCORDING TO
DON BINSARAUGH OF GINTEL & CO  HE SAYS
ANALYSTS HAD BEEN PREDICTING THE FIRST
QUARTER AT ONLY 35 CENTS TO 37 CENTS A
SHARE
```

Figure 3.

```
   ***

  (Quotes delayed over 15 minutes)

  03/27/83  Eastern time 14:14

      Dow Jones Symbol  VRB

  Security type  S   Exchange  A

  Bid/(Close)    42 3/4

  Asked /(Open)  42 5/8

  High           42 5/8

  Low            38 3/8

  Last           39 5/8

  Volume (100's)1276
```

Figure 4.

```
          MASTER MENU
       COPYRIGHT (C) 1983
   DOW JONES & COMPANY, INC

  TYPE    FOR

    A   DOW JONES BUSINESS
          AND ECONOMIC NEWS
    S   DOW JONES QUOTES
    C   FINANCIAL AND INVESTMENT
          SERVICES
    D   GENERAL NEWS AND
          INFORMATION SERVICES
```

Figure 5.

```
        FINANCIAL AND
    INVESTMENT SERVICES

  TYPE        FOR
 //DSCLO   DISCLOSURE II
 //EARN    CORPORATE EARNINGS
           ESTIMATOR
 //MEDGEN  MEDIA GENERAL
 //MMS     MONEY MARKET SERVICES

 FOR HELP, TYPE CODE AND HELP
 (EXAMPLE  //DSCLO HELP)
```

Figure 6.

```
              WEEKLY ECONOMIC SURVEY
                 OF MAR  01, 1983
              COPYRIGHT (C) 1983
           MONEY MARKET SERVICES, INC

  A SURVEY OF FORECASTS BY ECONOMISTS AND MONEY-MARKET
  DEALERS AT 40 TO 50 LEADING FINANCIAL INSTITUTIONS
  PREPARED WEEKLY BY MONEY MARKET SERVICES, INC
  BELMONT, CALIFORNIA

  ENTER        FOR

    A      COMMENTARY AND ANALYSIS
    B      MEDIAN FORECASTS OF MONETARY AND ECONOMIC INDICATORS
    C      CHARTS SHOWING DISTRIBUTION OF FORECASTS
```

Figure 7.

typing errors and to move the cursor around the screen. Figure 4 shows what a completed quote retrieval looks like.

During market hours, quotes are delayed 15 minutes, so you can obtain fairly current quotes during market hours if you like. Remember, prime time (day) access to the database is much more expensive than off hours (night) access. If you must have quotes during market hours there are services that could be cheaper ($150 to $200 per month), depending on how much you use the system. The News and Quote Retrieval segments are both straightforward and easy to use.


(01) FORECASTS OF THE CHANGE (IN $1M OF DOL)
PCT OF IN M1 DURING THE STATEMENT WEEK ENDED FEBRUARY 22
TOT RESP TO BE REPORTED FRIDAY... MARCH 4
MEDIAN =
UNCHANGED
30+
10+
0+
-3 0 -2 5 -2 0 -1 5 -1 0 -5 0 +5 +1 0 +1 5 +2 0 +2 5

Figure 8.



Figure 9.



The News and Quote Retrieval segments are straightforward and easy to use.

Figure 10.


COMPANY NAME APPLE COMPUTER INC
ENTER FOR
1 CORPORATE PROFILE
2 BALANCE SHEETS FOR 2 YEARS
3 INCOME STATEMENTS FOR 2 YEARS
4 QTRLY INC STATEMENTS (CUR FY)
5 LINE OF BUSINESS DATA
6 5-YR SUMMARY DATA (REVS, INCOME EPS)
7 FULL FINANCIAL DATA (2 THRU 6)
8 OFFICERS AND DIRECTORS
9 OWNERSHIP AND SUBSIDIARIES
10 OTHER CORPORATE EVENTS
11 MANAGEMENT DISCUSSION
12 CORPORATE RECORD (1 THRU 10)
13 FULL CORPORATE RECORD (1 THRU 11)
14 1-YR LIST OF REPORTS ON FILE WITH THE SEC
99 HOW TO ORDER FULL TEXT OF SEC REPORTS

Figure 11.

Figure 12.

Additional Information Services

The Additional Information Services segment of the database is a little more involved because of the variety and depth of information available. When this segment of the database is selected from the main menu (Figure 1) of the program, the program automatically enters the simple terminal mode. In this mode, the user can access new database segments as they are brought on line by Dow Jones & Co. The inclusion of a simple terminal mode in the program is a good idea and shows some foresight. Entering the Additional Services segment brings up the Dow Jones Master Menu (Figure 5). The first time you use this segment it is a good idea to print out the various help menus as you go along so you will have them for reference whenever you use the system. This procedure will save you time (on line) and money when you access the database.

Proceeding through several of the many possible sections of the database provides a good sampling of the service and the information that is available. Typing C from the Master Menu (Figure 5) gets you into the Financial and Investment Services menu (Figure 6). Moving into the Money Market services menu (Figure 7) you can get commentaries, analyses, forecasts, and charts of forecasts. The charts are shown in Figures 8 and 9. Note that some of the information is provided in 80-column format and is printed as such. Forty-col-

umn screens use wrap-around, i.e., the 41st through 80th character on each line are presented on the next line on the monitor.

If you chose the Disclosure II option you would obtain Figure 10. For Apple Computer, the available information appears in Figure 11; this is the same information found in a company's 10-K report. Selecting #1 Corporate Profile you get Figure 12. A five-year data summary, #6, is shown in Figure 13. If you are interested in obtaining earnings forecasts, you can obtain consensus forecasts using the corporate earnings estimator (menu Figure 6) to obtain estimates for any company in the database, in this case Apple, (Figures 14, 15, and 16).

```
                    FIVE  YEAR  SUMMARY
                        SALES          NET  INCOME          EPS
 1982                583 041 000        41 306 000         1 06
 1981                334 783 000        39 420 000         0 79
 1980                117 126 000        11 698 000         0 24
 1979                 47 847 000         5 073 000         0 13
 1978                  7 854 000           793 000         0 03
```

Figure 13.

```
    CORPORATE EARNINGS ESTIMATOR
  2ACKS INVESTMENT RESEARCH INC
          CHICAGO  ILL
 THIS WEEKLY DATABASE PROVIDES
 CONSENSUS FORECASTS OF EARNINGS
 PER SHARE FOR 2 400 COMPANIES
 BASED ON ESTIMATES PROVIDED BY
 1 000 RESEARCH ANALYSTS AT MORE
 THAN 50 MAJOR BROKERAGE FIRMS
 FOR CONSISTENCY  ESTIMATES ARE
 CONVERTED TO PRIMARY EARNINGS
 BEFORE EXTRAORDINARY ITEMS
 ----------------------------------
 PLEASE ENTER DESIRED STOCK
 SYMBOL AND PRESS RETURN
```

Figure 14.

```
 APPLE COMPUTER
   FISCAL YEAR ENDS   9/83

 EARNINGS PER SHARE ESTIMATES
 -MEAN      1 56
 -HIGH      1 70
 -LOW       1 40
 NUMBER OF ANALYSTS   14
 P/E RATIO  ESTIMATED EPS)   28  38
 PAST EARN PR SH ESTIMATES  (MEAN)
 --WEEK AGO      1 54
 --13 WEEKS AGO  1 46
 --26 WEEKS AGO  1 33
 ----------------------------------
 PRESS RETURN FOR NEXT PAGE
```

Figure 15.

```
 APPLE COMPUTER
   FISCAL YEAR ENDS   9/84

 EARNINGS PER SHARE ESTIMATES
 --MEAN     2 10
 --HIGH     2 75
 --LOW      1 30
 NUMBER OF ANALYSTS   10
 P/E RATIO  ESTIMATED EPS)   21  12
 PAST EARN PR SH ESTIMATES  (MEAN)
 --WEEK AGO      2 10
 --13 WEEKS AGO  1 73
 --26 WEEKS AGO  1 30
```

Figure 16.

```
      MEDIA GENERAL-FINANCIAL
            SERVICES  INC
 MARKET AND FUNDAMENTAL DATA ON
 COMMON STOCKS AND RELATED
 SUMMARY MATERIAL ON INDUSTRY
 GROUPS  COPYRIGHT  (C)  1983

 ENTER QUERY
```

Figure 17.

```
 APPLE COMPUTER INC
 -PRICE & VOLUME  02/18/83   (170)

 PRICE CHANGE          (1)
 -LAST TRDNG WK  -2 4%
 -LAST 4 WKS 21 4%
 -LAST 13 WKS 47 0%
 -LAST 52 WKS 142 0%
 -YR TO DATE 51 4%
 CHANGE VS   S & P 500
 -LAST TRDNG WK +7%
 -LAST 4 WKS 13 4%
 -LAST 13 WKS 134%
 -LAST 52 WKS 185%
 -YR TO DATE 144%
```

Figure 18.

```
 PRICE RANGE          (2)
 -LAST CLOSE $45 38
 -52 WEEK HIGH $64 50
 -52 WEEK LOW $18 75
 -5 YEAR HIGH $64 50
 -5 YEAR LOW $10 75
 RELATIVE PRICE
 -P/E RATIO CURRENT 37 2
 -P/E RATIO 5 YR AVG HI      NC
 -P/E RATIO 5 YR AVG LOW 45 3
 -PRICE TO COMMON EQUITY 1 294%
 -PRICE TO REV PER SHARE 390%
 -RELATIVE PRICE INDEX 704%
```

Figure 19.

```
 PRICE ACTION          (3)
 -BETA5 UP  3 31
 -BETA5 DOWN  1 50
 VOLUME
 -THIS WK SHRS  3,719,000
 -THIS WK DOLLAR $133,543,000
 -THIS WK % SHRS OUTSTND 4 76%
 -LIQUIDITY RATIO 9,944,008
 -ON BALANCE INDEX 143
```

Figure 20.

```
 APPLE COMPUTER INC
 -FUNDMNTL DATA- 02/18/83    (170)
 REVENUE               (1)
 -LAST 12 MOS $443 MIL
 -LAST FISCAL YEAR $335 MIL
 -PCT CHANGE LAST QTR 40 4%
 -PCT CHANGE YR TO DATE 40 4%
 EARNGS 12MOS $71 2Q MIL
 EARNINGS PER SHARE
 -LAST 12 MONTHS $1 32
 -LAST FISCAL YEAR $1 04
 -PCT CHANGE LAST QTR 46 7%
 -PCT CHANGE FY TO DATE 46 7%
 -PCT CHANGE LAST 12MOS 53 3%
 -FIVE YR GROWTH RATE 133 0%
```

Figure 21.

Figure 17 shows the Media General-Financial database. Skipping past some preliminary instructions, you obtain the information shown in Figures 18 through 23, which are self-explanatory.

Summary

It is clear from excerpts presented in this article that an enormous amount of financial information is available—not only financial news, but shop at home service, stock market pointers, customer information, and more (Figure 24). Apple's *Dow Jones News & Quotes Reporter* makes retrieval of this information a snap. The program is extremely easy to use and very well error trapped.

The major fault that I find in the program is that there is no provision to store the retrieved data on disk. The data retrieved can be viewed only on the monitor or printed on paper. It is a shame that the program lacks a disk storage feature. The kinds of data available in some segments of the database are the kinds of data needed for fundamental analysis of securities. The ability to store this data electronically for manipulation at a later time would be a very valuable feature. The lack of disk data storage detracts from what I consider to be an otherwise outstanding and useful program. □

```
 DIVIDENDS          (2)
 -CURRENT RATE $0 00
 -CURRENT RATE YIELD 0 0%
 -5 YR GROWTH RATE 0 0%
 -PAYOUT LAST FY 0%
 -PAYOUT LAST 5 YEARS 0%
 -LAST X-DVD DATE 00-00-00
 RATIOS
 -PROFIT MARGIN 10 7%
 -RETURN ON COMMON EQUITY 34 9%
 -RETURN ON TOTAL ASSETS      NA
 -REVENUE TO ASSETS           NA
 -DEBT TO EQUITY 1%
 -INTEREST COVERAGE           NA
 -CURRENT RATIO 3 2
```

Figure 22.

```
 SHAREHOLDINGS          (3)
 -MARKET VALUE $2,592 MIL
 -LTST SHR OUTSTND 57,133,000
 -INSIDER NET TRADING -408,000
 -SHORT INTEREST RATIO 0 0 DYS
 -FISCAL YEAR ENDS 9 MOS
```

Figure 23.

```
      WELCOME TO //INTRO: THE FREE
  NEWSLETTER OF NEWS/RETRIEVAL

 PRESS     FOR
  1   NEW OFFERING  COMP-U-STORE
            SHOP-AT-HOME SERVICE
  2   POINTERS  TRACKING MARKET
            VOLUME      AND MORE
  3   WHO, WHAT, WHERE  USAGE
            IDEAS FOR SUBSCRIBERS
  4   CUSTOMER INFORMATION  NEW
            REFERENCE CARD OFFERED
  5   DATA BASE NEWS  EXPANDED
            COVERAGE IN //SPORTS
            AND MORE
```

Figure 24.

The Choice of

SAVE THIS AD IT IS YOUR CATALOG AND CHANGES MONTHLY

Conroy-LaPointe — The Supply Center for the IBM-PC or XT

SOFTWARE for the IBM PC or XT

BUSINESS

		LIST PRICE	OUR PRICE
ASHTON-TATE, dBase II, requires CP/M-86 & 128K		$ 700	$ 399
dBase II requires PC-DOS & 128K		$ 700	$ 399
The Financial Planner	NEW!	$ 700	$ 399
dBase II User s Guide by Software Banc		$ 30	$ 30
Tutorial (128 Printer Book)	NEW!	$ 15	$ 12
Finder	NEW!	$ 295	$ 199
APPLIED SOFTWARE TECHNOLOGY, Versaform		$ 395	$ 295
CONTINENTAL, The Home Accountant Plus		$ 150	$ 112
PCM (Freq. Cataloging, Mailing)		$ 175	$ 99
Property Management		$ 495	$ 299
DATAMOST, Real Estate Investment Program	NEW!	$ 130	$ 89
Write-On (Word Processor Program)		$ 130	$ 99
DIGITAL RESEARCH, Concurrent CP/M-86	★	$ 350	$ 235
CBASIC-86 ™		$ 200	$ 139
CP/M-86		$ 80	$ 49
DOW JONES, Dow Jones Market Manager		$ 300	$ 239
EAGLE SOFTWARE, Money Decisions	NEW!	$ 150	$ 129
FOX & GELLER, Quickcode (MSDOS)		$ 295	$ 195
Graph (MSDOS, requires color graphics adapter)		$ 295	$ 215
HAYDEN, IBM Pie Writer	NEW!	$ 200	$ 136
HOWARD SOFT, Real Estate Analyzer II		$ 250	$ 199
INFORMATION UNLIMITED, Easy Writer II (Word Processor)		$ 350	$ 259
Easy Spoller II (IBM Words)		$ 225	$ 149
Easy Filer (DBMS)		$ 400	$ 299
INNOVATIVE SOFTWARE, T I M III (CBASIC)		$ 495	$ 329
★ INSOFT, Data Design (a powerful easy to use DBMS)	NEW!	$ 225	$ 199
Data Base Made Easy (Basic)	NEW!	$ 111	$ 111
★ LOTUS, 1-2-3	NEW!	$ 485	$ 339
MICROCRAFT, Verdict (Logic) or Bidkeeper, each (CP/M86)	NEW!	$ 495	$ 449
MICROPRO, WordStar (a true Word Star Training Manual		$ 495	$ 299
Mail Merge ™ (Call for CP/M-86, 3?4 and others)		$ 150	$ 129
SpellStar™		$ 250	$ 219
WordStar Professional, 4 Pak, 3 above + Starlinder		$ 995	$ 699
Starlinder ™	NEW!	$ 195	$ 139
mmCalc™		$ 495	$ 299
Report Star ™		$ 350	$ 199
★ MICROSOFT, Multiplan	MSDOS	$ 275	$ 179
Multiplan Word	MSDOS	$ 375	$ 275
Multiplan Word with Mouse	MSDOS	$ 475	$ 338
Multiplot, Financial Statement	MSDOS	$ 100	$ 75
Multiplot, Budget	MSDOS	$ 150	$ 115
mu Logi mu Star	NEW!	$ 250	$ 186
mu Math mu Simp	NEW!	$ 225	$ 169
Business BASIC Compiler	MSDOS	$ 600	$ 469
Pascal Compiler	MSDOS	$ 500	$ 369
C Compiler	MSDOS	$ 500	$ 375
BASIC Compiler	MSDOS	$ 350	$ 265
Fortran Compiler	MSDOS	$ 350	$ 269
COBOL Compiler	MSDOS	$ 750	$ 569
BASIC Interpreter	MSDOS	$ 350	$ 269
MX, TIBOR?, Direct Calc (makes a clear Lotus output Visacalc)		$ 195	$ 139
NORTH AMERICAN BUS SYSTEM, The Answer		$ 250	$ 189
OSBORNE/CDEX, Book & Disk - Business, Statistics & Math Programs			
Some Common Basic Programs (70 programs)		$ 100	$ 89
Practical Basic Programs (40 more programs)		$ 100	$ 89
PBI, CORPORATION, Personal Investor		$ 145	$ 99
PEACHTREE SOFTWARE, Peach Pak 4 (GL, AR/B AP)		$ 995	$ 699
PERFECT SOFTWARE, Perfect Write ™		$ 349	$ 219
Perfect Speller ™ or Perfect Calc ™, each		$ 295	$ 129
Perfect Filer ™		$ 595	$ 259
ROSZEN, T Maker III		$ 295	$ 219
SOFTWARE PUBLISHING, PFS: File	NEW!	$ 140	$ 86
PFS: Report	NEW!	$ 140	$ 86
SORCIM/IUSA, SuperCalc II		$ 295	$ 199
Supersort I		$ 195	$ 139
Spellguard		$ 195	$ 129
STC, The Creator		$ 300	$ 199
SYNAPSE, File Manager		$ 150	$ 89
SYNERGISTIC, Data Reporter		$ 250	$ 179
★ VISICORP, VisiCalc ? 64K		$ 250	$ 179
VisiCalc w VisiSchedule, each		$ 250	$ 179
VisiTrend/Plot		$ 300	$ 219
VisiFile or Desktop Plan I, each		$ 300	$ 219

UTILITY

★ CENTRAL POINT, Copy II PC, Backup and Utility	NEW!	$ 40	$ 36
★ CORE, Fastrak ?, RAM Disk simulator and printer spooler program. Works on CP/M-86 or optional RAM Card. Manu Drawn	NEW!	$ 100	$ 89
HAYES, Smartcom II		$ 119	$ 89
MICROCOM, Microcomputer		$ 100	$ 89
MICROSTUF, Crosstalk		$ 195	$ 129
NADY SYSTEMS, Backup Plus Utilities		$ 35	$ 29
NORELL DATA, System Backup		$ 50	$ 39
NORTON, Norton Utilities, 5 powerful programs, 3 disks		$ 80	$ 70

HOME & EDUCATIONAL

EPYX, Automated Simulations, Temper or Apoxie Oil Barons	NEW!	$ 40	$ 29
	NEW!	$ 100	$ 79
★ ARMONK, Executive Suite		$ 40	$ 27
BLUE CHIP, Millionaire		$ 80	$ 39
BPI SYSTEMS, Personal Accounting		$ 195	$ 139
★ BRODERBUND, Apple Panic		$ 30	$ 22
CONTINENTAL, The Home Accountant Plus		$ 150	$ 112
DATAMOST, Pig Pen or Space Strike, each		$ 30	$ 22
DAVIDSON, The Speed Reader II		$ 75	$ 69
INFOCOM, Deadline		$ 50	$ 39
Zork I or Zork II or Zork III each		$ 40	$ 29
★ INSOFT, Word Tris or Quadris or Mysteries, each	NEW!	$ 35	$ 29
★ MICROSOFT, Flight Simulator (by Sub-Logic)	NEW!	$ 50	$ 36
PBI, CORP, Personal Investor		$ 145	$ 99
SIR-TECH, Wizardry, Scenario #1		$ 40	$ 35
SPINNAKER, Snooper Troops #1 or #2, each		$ 40	$ 35
Story Machine or Facemaker or Rhymes & Riddles, ea.		$ 35	$ 29
STRATEGIC, the Warp Factor		$ 40	$ 30

IBM-c is a trademark of IBM Corporation

IBM-PC

System Includes
Two 320K Disk Drives by CDC
90 Day Warranty By Us
Call For Details And Configurations

for the IBM PC or XT

HARDWARE

		LIST PRICE	OUR PRICE
MEMORY CHIP KITS Add-on to your memory cards or XT mother			
★ 64K kit, 200NS, 9 chips, 4164	NEW!	$ 150	$ 49
16K kit, 250NS, 9 chips, 4116 (No PC-1 motherboard)		$ 30	$ 19
AST Combo Plus, 64K w asynch, par & clock cct		$ 395	$ 279
Above Combo Plus 256K S?P/C		$ 695	$ 525
SuperVision, monochrome 132 Col, x 44 line video board		$ 850	$ 699
2 Plus 64, Intel 2?64, 64K expand to 192K, par port		$ 875	$ 695
★ CommX, 256K RAM Card with 7 ports ? RAM disk emulator and printer spooler software 2 Year Warranty		$ 750	$ 235
CURTIS PC Pedestal ? for Displays on PC		$ 80	$ 68
Hi Foot Caster for IBM Keyboard (extends 2 to 9")		$ 50	$ 35
Key Tronic, 83 Key Standard Typewriter Keyboard	NEW!	$ 200	$ 159
MICROSOFT, 64K RAM Card w Parity		$ 350	$ 259
256K RAM Card w Parity		$ 675	$ 535
64K Expansion Card, 4 of 4 Function		$ 395	$ 295
256K System Card, 4 Function		$ 625	$ 465
MBI Monte Carlo 64K Ram Function (to 1000K)		$ 625	$ 365
QUADRAM, 64K RAM Card w Parity			
★ Quadrlink, IBM to Apple ?e Link		$ 180	$ 140
Quadboard 64K, expandable to 256K, 4 function board		$ 395	$ 265
Quadboard 256K, four function board		$ 595	$ 429
Quad ?-2 + 64K plus serial port		$ 325	$ 275
Quad ?-2 + 256K plus serial port		$ 550	$ 440
Quad ?-512 + 512K plus serial port		$ 895	$ 675
Quadmother		$ 295	$ 235
Quadmother II use with Quadmother I, set 64K x 256		$ 275	$ 269
Microtaker w/ Copy Par Par, 64K, #1&#2 w Parallel Supply		$ 180	$ 139
Microtaker w/ Copy Par Par, 64K, #1&#2 w Power Supply		$ 319	$ 235
Microtaker w/ Copy Par?Par, 256K #1&#? 2&#? Power Supply		$ 460	$ 345
Microtaker, Snap-on 64K Par?Par Expan #1&#2 w/Power Supply		$ 179	$ 145
Microtaker, Snap-on 64K Par?Par Expan #1&#2 w/Par Supply		$ 319	$ 235
All Microtakers are expandable (re-copy by $12K) (Snap-ons by $4K)			
TG PRODUCTS Joystick		$ 65	$ 49

DRIVES

ControlData OR Tandon

★ **DSTM DRIVES** Includes Sided 360K 320K Same as new supplied with IBM-PC/8 XT. Tested, installation instructions 90 day warranty by us

each	$ 529	$ 249
2 or more	$ 529	$ 239
	$ 395	$ 199

★ **DAVONG** BITERNAL Hard Disk, 5-6MB $1895 $1595
(For PC+ 1, complete) 15-19MB $2795 $1995
MAYNARD, Floppy Drive Control Board, for up to 4 drives $ 185 $ 165
same with Serial Port $ 205 $ 235
same with Parallel Port $ 275 $ 206

VISTA IBM-PC/XT Hard Disk Backup 6MB V1200 Disk Pak $1549 $1049

PRINTERS AND ACCESSORIES

	CALL
EPSON MX or FX PRINTERS	
LEADING EDGE Combs Banana NEW!	$ 250
OKIDATA, Microline 82A, 80 col, 120 cps, S/P, friction sprocket	$ 449
Microline 83A, 132 col, 120 cps, S/P, friction sprocket	$ 649
PRACTICAL PERIPHERALS, Microbuffer II+ Limited Serial	$ 349
Microbuffer II+ Limited Serial, Parallel	$ 349
★ STAR MICRONICS 9x9 Dot Matrix 120cps, 2 3K Games 10"X	$ 499
9x9 Dot Matrix 160cps, 2 3K, Games 15"	$ 649
IBM-PC to Epson or Star Micronics Cable	$ 60
Apple Interface and Cable for Epson or Gemini	$ 99
Grappler - by Orange Micro, specify printer	$ 165
Apple Graphics Dump Program by Epson	$ 19
LETTER QUALITY - DAISY WHEEL PRINTERS:	
COMREX Comrex CR?, 200 wpm Limited Special $1199	
Comrex Tractor Feed for CR-1	$ 119
SUPPLIES: Tractor Feed Paper Ribbons, Heads, Dume Daisy Wheels and Ribbons	

	LIST PRICE	OUR PRICE
ASHTON-TATE, dBase II	$ 700	$ 399
MICROCRAFT, Verdict (Logic) or Billkeeper (Professional) each	$ 995	$ 469
MICROPRO, WordStar ? plus free WordStar Training Manual	$ 495	$ 269
MailMerge ™ (Call on 2 Pak 3 Pak and others)	$ 250	$ 129
WordStar Professional 4 Pak 3 above Starlinder	$ 895	$ 429
MICROSOFT, Multiplan	$ 275	$ 179
Fortran 80 Compiler	$ 500	$ 325
BASIC Compiler	$ 350	$ 295
COBOL 80 Compiler	$ 750	$ 545
mu Logi mu Star 80	$ 250	$ 179
Macro-80	$ 200	$ 145

MORE IN STOCK

8" CP/M-80 SOFTWARE MUCH MORE IN STOCK

MONITORS AND ACCESSORIES

		LIST PRICE	OUR PRICE
AMDEK 12" Green ?-300G		$ 200	$ 159
12" Amber ?-300A		$ 210	$ 158
12" Color I Composite		$ 379	$ 299
★ 12" Color II RGB, Hi Res (Apple II/ II E (IBM PC)		$ 529	$ 459
★ 13" Color III RGB Commercial (Apple II/ II E)		$ 479	$ 399
DVM Color Bl/ III to Apple II Interface		$ 199	$ 175
NEC 12" Green, IBM Jr/ PCjr 1401H		$ 249	$ 159
12" Color Composite Model JC-1212M		$ 450	$ 348
PRINCETON, RGB Hi Res		$ 750	$ 599
QUADRAM Quadchrome 12" RGB Color		$ 795	$ 565
Quadchrome II 13" RGB ? 512 ? 2 pages w cable card disk		$1095	$1095
SANYO 9" Green, Model DM?109		$ 200	$ 139
12" Green, Model DM?120CK		$ 280	$ 198
13" Color, Composite Model DM5613		$ 470	$ 349
ZENITH 12" Green Model ?ZM-121		$ 150	$ 88

MODEMS AND ACCESSORIES

		LIST PRICE	OUR PRICE
HAYES, Microcomputer II for the Apple II+		$ 379	$ 275
Apple Terminal Program for Microcomputer II		$ 100	$ 80
IBM-PC Smartcom II Software		$ 119	$ 89
Stack Compatible (RS-232)		$ 249	$ 199
Smartmodem 300 (RS-232)		$ 269	$ 225
Smartmodem 1200 (RS-232)		$ 699	$ 535
IBM-PC Smartmodem 1200 ß Plus Smartcom II		$ 599	$ 439
Microtaker (100 5-1/4 disk)		$ 395	$ 275
IBM-PC to Modem Cable		$ 39	$ 29
NOVATION Apple-Cat II 300 BAUD		$ 249	$ 179
212 Apple Cat 1200 BAUD		$ 775	$ 569
SIGNALMAN MKIII (RS-232)		$ 99	$ 79
SSM Transcend 1 for Apple II Data Comm		$ 69	$ 68
Modem Eliminator for Apple ?s ? ?/+		$ 29	$?/+
Transmodem 1200 (110 300 1200)		$ 695	$ 595

CORVUS

8 Meg Hard Disk w interface	$2395	$1995
11 Meg Hard Disk w interface	$3195	$2695
29 Meg Hard Disk w interface	$4195	$3495
IBM-PC interface (IBM DOS) Manual 8 Cable Kit	$ 300	$ 239
Mirror Back up Software	$ 750	$ 595
Apple Interface Manual 8 Cable Kit	$ 300	$ 239
Other Interfaces, Omni-Net Constellation Mirror All in Stock		

hp

★ HP ?5C Portable Computer 48K load to 148K $ 995 $ 885
HP ?41C Calculator $ 195 $ 148
HP ?41CV Calculator with 2 ?M Memory $ 275 $ 218
Full Line of HP ?41 and HP41 accessories & software Call

MICROSOFT

MORE IN STOCK

DISKETTES

CONTROL DATA CORPORATION Certified Top of the Line Diskettes.

CDC 100 each 5-1 4 with ring, S S DD 48 t Apple IBM etc ;	$ 550	$ 189
10 each 5-1 4 with ring, S S DD 48 t (IBM H P etc)	$ 55	$ 39
100 each 5-1 4 with ring, S S DD 48 t (IBM H P etc)	$ 750	$ 295
10 each 5-1 4 with ring, S S DD 96 t (IBM H P etc)	$ 75	$ 35
DYSAN, 10 each 5-1 4 SS SD (Apple etc)	$ 60	$ 38
10 each 5-1 4 DS DD 48 T (IBM H P etc)	$ 80	$ 49
MAXELL 10 each 5-1 4 MD-1 SS, SD or SS DD	$ 55	$ 29
GENERIK ™ DISKETTES		
100 each SS SD 5?inch (Apple Atari etc)	$ 415	$ 130
★ 1000 each SS SD 5?inch (Apple Atari etc)	$3200	$ 995
100 each DS DD 48 Track (IBM H P etc)	$ 825	$ 168
★ 1000 each DS DD 48 Track (IBM H P etc)	$4560	$1200

With jackets, no labels; produced by a top of the line manufacturer. 90 day warranty by us.

PLOTTERS

ENTER COMPUTER Sweet-P Personal Plotter with Apple Interface and Software $ 795 $ 695

★ Means a BEST buy **AD #978**

CASH & CARRY OUTLETS:
Over-the-counter sales only Open Monday through Saturday 10:00 until 5:00

PORTLAND, OREGON, 11580 S.W. Pacific Hwy -Terrace Shopping Center Tigard, 97?3 Phone 639?7?7 and ? Call ?45-1500

SEATTLE, WASH., Grand Opening Soon, Call for location (800) 547-1266

ORDERING INFORMATION AND TERMS: All Mail: P.O. Box 23068, Portland, OR 97223, Include telephone number AD #978
Call terms usually in stock. We immediately honor Cashiers Checks, Money Orders, Fortune 1000 Checks and Government Checks. Personal or Company Checks allow 20 days to clear. No C.O.D. And ?% for VISA or MC. For U S Mainland add ?% for shipping, insurance and handling ($4 M for UPS with $3 minimum for S&H. UPS ground is standard to and ?% more for UPS Blue with $10 minimum for S&H. Add 12% total for S&H for US Postal. APO or FPO with $15 minimum for S&H. For Hawaii, Alaska and Canada, UPS is in some areas only, all others are Postal so call. rents or specify Postal. Foreign orders except Canada for $ I&M add 18% or ?25 minimum for S&H except for monitors add 30% or $50 minimum for S&H. Prices subject to change and typo errors, so call to verify. All goods are new. include warranty and are guaranteed to work. Due to our low prices, ALL SALES ARE FINAL. Call before returning goods for repair or replacement. Orders received with insufficient S I&H charges will be refunded.
ORDER IN OR OUR HOURS 8 A M to 9 P M. PST, Monday through Friday and 10 a m Saturday 8 A M here is 8 A M in New York

OUR REFERENCES: We have been in computers and electronics since 1958 a computer dealer since 1979 and in mail order since 1980. Banks 1st Interstate Bank, (503) 640-4679 We belong to the Chamber of Commerce (503) 644-0123, Better Business Bureau (503) 227-0648 and Direct Marketing Association or call Dunn and Bradstreet if you are a subscriber "Estrak ?" and Generik ™ are trademarks of ComX Corporation WordStar MailMerge Starlinder, InfoStar are trademarks of MicroPro

Professionals™

LOW PRICES TO PROFESSIONALS WHO KNOW WHAT THEY WANT AND KNOW HOW TO USE IT™

DEALERS WE BUY EXCESS INVENTORIES

apple® II+/IIe supply center

APPLE IIe 64K 40 COLUMN $1,175
APPLE IIe 128K 80 COLUMN $1,395
APPLE IIe STARTER SYSTEM BY APPLE (System A)
64K and IIe computer
Disk I with controller
Apple Monitor III
Monitor Stand
$1,695

APPLE IIe STARTER SYSTEM BY CONROY-LA POINTE (SYSTEM B)
128K and IIe computer
1 Micro Sci Drive with controller
Fan Utility and DOS 3.3 Diskette
Sanyo 9" Green Monitor
RF Modulator for color TV
Game Paddles
Game with color graphics and sound
$1,875

WARRANTY Limited warranty is 100% Parts & Labor for 90 days by us

To substitute or delete drive on System B, subtract $245 and add drive price (System D)

To add one Micro Sci A2 Drive to above add $245 (System DD)

To substitute or delete monitor on System B, subtract $130 and add other monitor price (System M)

HARDWARE
for Apple II

RAM EXPANSION

	LIST PRICE	OUR PRICE
● CompZ for IIe 80 col 64K Addon Card	$ 295	$145
● CompZ RAM Card 21+ Way 8 Slot	$ 595	$ 39
● ALS ADOSplus II	16K $ 150	$ 79
● Microsoft RAM Card II	16K $ 130	$ 79
● Saturn Systems RAM Card II	32K $ 249	$149
RAM Card II	64K $ 425	$319
RAM Card II	128K $ 595	$459
● Axiom RAM Disk System	64K/128K $ 995	$795

VIDEO CARDS

● ALS Smarterm® II w/	3 "/3	$130
CamX 80 col. 64K Addon Ilex	7.95	$145
Videx Videoterm 80 col w/	5	$245
● UltraTerm 80 col w/	3.79	$279
Soft Video Switch-II	5 .35	$ 25
Enhancer II-B	5 .49	$ 39
Function Strip II	5 .79	$ 69
Full Video Line Call Up to 30% off		
Vista Vision 80	$ 295	$199

MISCELLANEOUS

ALS 16K 2716 EPROM Card w/ 2	$ 99	$ 79
Cards ea	$ 189	$129
Cards ea	$ 279	$139
A&T&R RF Modulator to use TV	$ 35	$ 25
CCS Serial Interface 7710A	$ 150	$ 99
Dan Paymar Lower Case Chip-II	$ 50	$ 30
Dan Utah DAC-800 S-A Mouth	$ 125	$ 85
Eastside Word Card copier	$ 65	$ 49
Kensington System Saver	$ 90	$ 80
Key Tronic 5000 Keyboard		
84 keys (-II)	$ 298	$219
Kraft Joystick (Adj-II-B)	$ 65	$ 49
Paddle (Adj-II-B)	$ 50	$ 39
M&R Sup-R-Term	$ 69	$ 49
● Microsoft Z80 SoftCard	$ 345	$235
Z80 SoftCard Plus (-ProDOS)	$ 345	$235
SoftCard Premium Pack-II	$ 695	$495
SoftCard Premium Pack-IIe	$ 495	$345
Micro Tek Dumpling 64 Buffer	$ 349	$269
● Orange Micro Grappler Plus	$ 199	$159
Practical Peripherals		
MBF 16/64K Pair (Epson Interface) - as	$ 279	$200
MBS 8K 32K Set (Epson Interface) - as	$ 219	$180
MicroBuffer II 16K - as	$ 259	$199
Pair Serial/Parallel - as		
MicroBuffer II 64K - as	$ 349	$259
Pair Serial/Parallel - as	$ 375	$279
PCPI Appli-Card, 14 features - &Mfg	$ 175	$ 99
RH Electronics Super Fan II	$ 75	$ 69
● Saturn Systems Accelerator II	$ 599	$425
SSM A10-A Serial/Parallel Interface	$ 225	$189
TG Products Game Paddles (II +)	$ 70	$ 49
Joysticks (II +)	$ 60	$ 45
Select-A-Port (II +)	$ 69	$ 44
Trak Ball (II +)	$ 69	$ 44
Videx PSIO Para Ser Interface	$ 279	$199
WICO Trackball Adj-II +	$ 90	$ 51
Analog Joystick	$ 70	$ 47

SOFTWARE
on disk for Apple II II - IIE

BUSINESS

	LIST PRICE	OUR PRICE
Apple Computer, Inc. 50% off list, on Apple Inc. software	Call	
Applied Soft Tech. VersaForm	$ 389	$265
Artic Multi-Window II	NEW! $ 150	$ 98
Ashton-Tate dBase II (Req Z80)	$ 700	$399
Financial Planning Pkg (Z80)	$ 700	$399
Friday	$ 295	$180
User's Guide by Software Banc	$ 24	$ 19
BPI Systems GL AR AP PR or thru each	$ 395	$295
Broderbund Bank Street Writer	$ 70	$ 39
Continental GL AR AP or PR ea	$ 250	$180
Home Accountant	$ 75	$ 49
FCM	$ 100	$ 99
Dow Jones Market Analyzer	$ 300	$230
Hayden Pen Writer (Specify 80 col/ board)	$ 150	$ 88
Howard Soft. Real Estate Advisor II	$ 195	$128
Tax Preparer	$ 225	$149
Ints. Unlim. Typing Tutor (PRO)	$ 150	$119
LJK Letter Perfect w/ Mail Merge	$ 150	$ 89
● **Micro Craft** Inventory (Z80 CP/M Card)		
Professional Billkeeper	$ 995	$600
Vendor Lodger Billing	$ 995	$600
Micro Lab Tax Manager	$ 180	$119
Micro Pro (all require Z80 CP/M Card)		
WordStar™ - Training Manual	SPECIAL $ 495	$200
WordStar	SPECIAL $ 995	$345
SpellStar™	SPECIAL $ 250	$129
● MicroStar Professional 4 Pak		
3 above + Star Index	SPECIAL $ 895	$429
● WordStar ■ MailMerge & CP/M special	SPECIAL $ 995	$345
Microsoft Multi-Plan (CP/M or Apple DOS)	$ 275	$180
Multi-Plan Z80 Addon (CP/M or DOS)	$ 125	$ 79
Bugger Multisoft (CP/M or DOS)	$ 150	$111
Sierra On-Line ScreenWriter II	$ 130	$ 98
The Dictionary NEW!	$ 100	$ 88
Camera Manager II NEW!	$ 230	$154
Osborne C.P. Soft Disk and Book:		
Some Common Basic Programs (75 each)		
Statistics and Math Programs	$ 100	$ 49
Practical Basic Programs (40 each)	$ 100	$ 49
Peachtree Requires CP/M & MBasic; 40 columns		
Series 40 GL & AP & AP - all 3	$ 595	$395
Series 40 line or Payroll each	$ 400	$275
Series 8 Text & Spell & Mail - all 3	$ 400	$275
Perfect. Perfect Writer	$ 495	$219
Perfect Speller	$ 295	$179
Perfect Writer Speller 2 Pak	$ 695	$250
Softporn (-II Rated)	$ 345	$149
Quark Word Juggler (Ile)	$ 239	$179

	LIST PRICE	OUR PRICE
Sensible Sens. Speller, specify 80 Col Brd	$ 125	$ 85
★ **Silicon Valley** Word Handler	$ 250	$139
Sat. Sys. Executive Secretary	$ 250	$188
Executive Speller	$ 75	$ 55
Software Publishing PFS: File	$ 125	$ 85
PFS: Report	$ 125	$ 85
PFS: Graph	$ 125	$ 85
Stoneware DB Master	$ 229	$149
DB Utility-I or II	$ 95	$ 99
Videx Appointer Synthesized disk	$ 20	$ 15
Vidcalc 80 col. printout disk	$ 50	$ 30
Vidcalc 80 col. to 1-2-3 disk	$ 90	$ 88
Videoterm Utilities Disk	$ 37	$ 30
VisiCorp Personal Visiplanner		
Visicalc 3.3	$ 250	$199
Visiplot (Advanced file) NEW!	$ 250	$199
VisiFile or VisiDex each	$ 250	$150

UTILITY & DEVELOPMENT

Beagle Utilities	$ 20	$ 15
DOS Boss	$ 24	$ 15
Apple Mechanic	$ 30	$ 22
Control Point Fixer (DOS 3.3 and Utility	$ 20	$ 15
Copy II Plus (bit copier)	$ 30	$ 24
Computer Appl. Notcbes Away II	$ 79	$ 59
Epyx Graphics Dump	$ 13	$ 9
Insoft Grafi GRX by Paul Lutus	$ 75	$ 68
Microsoft A.L.D. II	$ 125	$ 75
BASIC Compiler	$ 395	$299
Cobol-80	$ 750	$549
Fortran 80	$ 395	$149
TASC Compiler	$ 175	$150
● **Omega** (Locksmith Bitcopier)	$ 70	$ 75
Pengun Comp. Graphics. Sys	NEW! $ 70	$ 53
Graphics Magician	NEW! $ 40	$ 34
Phoenix Zoom Grafix	$ 40	$ 34
Quality Bug Off! (Ile)	NEW! $ 40	$ 34
Saturn Systems VC-Expand	$ 109	$ 49
VC-Expand 80	$ 149	$ 99
Sensible Basic Utils (for compiler)	$ 40	$ 30

HOME & EDUCATION

Broderbund Graphics Ms	$ 35	$ 26
BudgeCo Pinball Construc Set	$ 40	$ 27
Continental Home Accountant	$ 75	$ 49
Datamost Aztec or Zaxxon each	$ 40	$ 27
Edu-Ware (Large Inventory)	Call	
Hayden Sargon II (Chess)	$ 35	$ 29
Infocom Zork I II or III or Starcross each	$ 40	$ 27
Deadline	$ 50	$ 34
Lightning Mastertype	$ 40	$ 27
Micro Lab Miner 2049er	$ 40	$ 27
Muse Castle Wolfenstein	$ 35	$ 23
Sierra On-Line Ultima II	$ 60	$ 48
Softporn (-II Rated)	$ 35	$ 29
Sir-Tech Wizardry	$ 50	$ 39
Sub-Logic Flight Simul	$ 34	$ 25

OTHER BRANDS AND PROGRAMS IN STOCK CALL.

DISK DRIVES for APPLE II+ /IIe

M-Sci MIC RO-SCI	A2 (-II & -) 143K Disk Drive	$ 478	$ 249
	Controller Card for A2 Drive	$ 160	$ 79
	Disc Disk Utility and DOS 3.3 Software	$ 20	$ 15
Rana	Elite-1 143K 40 Tracks	$ 379	$ 289
	Elite-2 320K 80 Tracks	$ 549	$ 429
	Elite-3 652K 160 Tracks	$ 649	$ 549
	Elite-3 Controller w Manual & Disk	$ 149	$ 89
TEAC	● 143K Disk Drive 1/2 Hight	$ 379	$ 279
	Controller Card	$ 80	$ 69
	●Electronics by Cornell		
VISTA	Solo S: 143K Disk Drive Std Height	$ 300	$ 249
	Duet S: Double Sided, 320K Half Height	$ 420	$ 338
	Quartet S: 2 Quints Side by Side w/ Standard Cabinet	$ 715	$ 575
	Controller Card	$ 88	$ 75
	Disk Pak V1200, 64MB Backup System	$1540	$1040
	● V1800 Dual 8" Std Format		
	● Controller Compatible for Apple	$2195	$1295
● CENTRAL POINT Fixer Utility and DOS 3.3		$ 29	$ 15

WHILE THEY LAST
● OVERSTOCK SPECIALS ●
FOR APPLE II/II + /IIe

● ALS Synergizer - Supercalc - Condor for (II +)	$ 749 $299
Anadex DP9500 Dot Matrix Printer	$ 995 $395
● CCS Serial Interface 7710A	$ 150 $ 99
● CompZ 16K RAM Card 21+ Warranty for II -	$ 179 $ 39
MicroCom Micro Courier	$ 250 $ 99
Micro Telegram	$ 250 $ 99
Microsoft 16K RAM Card for II -	$ 150 $ 79
Saturn Systems 32K RAM Card for II -	$ 249 $169
Silicon Valley Word Handler	$ 250 $139
Videx Videoterm 80 column card for II	$ 345 $229

VSC-002
Apple II + Work-a-like, Look-a-like
Note: Substitutions and revisions same as System B specs
System 2 is software and hardware compatible to the Apple II +
VSC-002 64K (Apple II – Compatible) $ 899 $ 395
VSC-002 64K (Same System I same as Apple IIe System B above except 64K, 80 columns) $1510 $1195
Limited Quantity

AXLON The Leader in Atari Add-ons
ATARI
Rampower I 72K System 800/XL $ 475 $299
Rampower 48K Module for 400/1 $ 195 $115
Rampower 32K (400 or 800) $ 135 $ 89
Ramcan Diagnostic Diskette $ 15 $ 12

★ Means a BEST buy.

AD #978

VISA

master charge

THE WORLD'S LARGEST COMPUTER MAIL ORDER FIRM™

CONROY-LA POINTE™
Formerly **Computer Exchange**™

ALL MAIL: P.O. Box 23068, Portland, OR 97223
SHOWROOM AT 11507 SW PACIFIC HWY PORTLAND, OR OPEN M-SAT 10-5

CIRCLE 133 ON READER SERVICE CARD

NATIONAL ORDER DESK **TOLL FREE (800) 547-1289**

All Other Orders including Portland: 245-6200

Oregon TOLL FREE [800] 451-5151

Hot Line For Information On Your Order [503] 245-1030

AtariWriter

creative computing

SOFTWARE PROFILE

Name: AtariWriter
Type: Word processor
System: 16K Atari 400/800/1200
Format: Cartridge
Language: Machine language
Summary: A nicely packaged and usable word processor.
Price: $99.95
Manufacturer:
Atari, Inc.
1265 Borregas Ave.
Sunnyvale, CA 94086

Arthur Leyenberger

It seems that every time you turn around there is another word processor program for the Atari computer. The latest entry in the word processing sweepstakes, *AtariWriter,* comes from none other than Atari itself. This cartridge-based program is unique in that it allows text files to be saved on cassette tapes, opening up the world of word processing to the Atari user without a disk drive. This feature, together with its ease of use, makes *AtariWriter* a candidate for "Best Atari Product in a Long Time."

An easy to use program is one that may be used immediately after removing it from its package. *AtariWriter* is such a program as evidenced by my beginning to type this review only moments after opening the box. Turn on the computer (400, 800, or 1200), pop in the cartridge and select the Create option from the menu when it appears. You are now in the Create mode and may begin typing. Pressing the ESC key at any time brings back the main menu without losing any of your text contained in memory.

Time and errors can also be minimized by using the Search and Replace functions.

If *AtariWriter* is used with a disk drive, the Atari 810 Master Disk (or any disk containing DOS 2.0S files) must be inserted into the drive before powering up the computer. Otherwise, the Atari 410 Program Recorder should be connected prior to inserting the cartridge and applying power.

Unlike the *Atari Word Processor* (Atari's previous word processing program) the menu that appears at power up is the only menu used in the program. The activities that may be performed with the word processor are listed alphabetically. Menu selections are made by entering the first letter of the command (displayed in reverse video). The program then asks what you want to do next.

The Create File option is used to start writing a new text file. If a text file already exists in memory, *AtariWriter* asks if you want it erased. This type of fail safe message appears throughout the program whenever there is a possibility that you may inadvertently delete or erase some text.

Editing

The Edit File option of the main menu allows revisions to be made to a text file already in memory. It is usually used after loading, saving, or printing a text file. The editing functions are available only in this mode and are particularly easy to use. The cursor (a blinking underline) is moved through the text one character at a time by means of the CTRL key plus one of the four arrow keys. The OPTION key plus the up or down arrow key moves up or down one screen at a time.

Most of the text manipulation and formatting commands are initiated by using the CTRL key or one of the Special Function keys in conjunction with another key. For example, to determine the amount of currently available memory in bytes, you would press OPTION-F. With 48K of memory and a disk drive,

Arthur Leyenberger, 40 Lawrence Rd., Parsippany, NJ 07054.

Can you tell the IBM from the Transtar 130?

A

Letter quality
standard of
the industry

5x magnification

B

Letter quality
standard of
the industry

5x magnification

One of these two print samples was generated by an **IBM Selectric II**: the letter quality standard of the industry.

The other was generated by the new **Transtar 130** letter-quality printer.

And print quality is just the beginning! The new Transtar 130 daisy wheel printer is also plug-and-go compatible with the best-selling word processing packages! It features bidirectional printing, superscript, subscript, underlining and a true boldface. Retail price? **Only $895.**

Quietly producing copy at 18 cps Shannon text speed, the Transtar 130 also features a unique autoload button to make printing on letterheads a breeze! Three new daisy wheels have just been made available for the 130 from your dealer: letter gothic (shown), script, and a 15-pitch "gothic mini"—perfect for printing spreadsheets to fit on one page!

Offering an end-user warranty period of a full six months, the Transtar 130 is an extraordinarily reliable machine. Its minimal failure rate runs less than 1%, but if your 130 should ever need repair, a nationwide network of authorized Transtar service centers stands ready.

Have you decided yet whose type is whose? If you picked A...You picked Transtar. The new standard for letter quality printing.

Transtar

P.O. Box C-96975, Bellevue, WA 98009

IBM is a registered trademark of International Business Machines, Inc.

CIRCLE 221 ON READER SERVICE CARD

AtariWriter main menu.

Search and replace mode.

Text entry screen.

you start out with approximately 20K of memory available for text. This translates into about 16 double-spaced pages. Slightly more text memory is available if only a tape recorder is used.

Other straightforward commands are: CTRL-A, move cursor to beginning of line; CTRL-Z, move cursor to end of line SELECT-T, move cursor to top of file; SELECT-B, move cursor to bottom of file; SELECT-S, search and replace; CTRL-P, begin new paragraph; and CTRL-C, center text.

Blocks of text can be manipulated easily by placing a CTRL-X at the beginning and at the end of the block. The block may then be deleted, copied, or moved to another location. Copying and moving text are very powerful features, allowing you to duplicate or shift parts of the text file around without having to retype the material.

Time and errors can also be minimized by using the Search and Replace functions. For example, if I consistently misspelled the word Atari in this text file I could use these functions to locate and to correct each mistake quickly. The program gives me the choice of deciding whether to replace each occurrence individually or change all of them at once (globally).

Unfortunately, control characters may not be used with the Search and Replace functions. For example, whenever I use the word *AtariWriter* I use two printer control codes before and after the word to turn the italics font on and off on my printer. Control codes are inserted by preceding the decimal value of the printer code with a CTRL-O. With other word processors I have gotten into the habit of placing ## at the start of the word and a #$ at the end of the word to be italicized. When I am finished with the entire document I perform a global search and replace the ## and #$ with the corresponding printer codes.

When creating a new or editing an existing text file the bottom of the screen always displays the file name (if loaded from disk), the line and column position, and a message stating, Press ESC to Return to Menu. The default tab positions are indicated by arrows. The first line at the top of the text file is called the Print Formatting Block and displays the values used for formatting and printing. These settings include left, right, top, and bottom margins; spacing, lines per page and justification information; and paragraph indent and skip values. These values have default settings which you may change and save with the text file.

An interesting and useful function of* AtariWriter *is the ability to see on the screen what your printed document will eventually look like.

Menu selections for disk interaction include: disk formatting, displaying or printing a disk file index, and loading, saving, and deleting files. The Save File command has several useful features. If the text in memory is to be saved under the same name as is displayed at the bottom of the screen only the RETURN key need be pressed in response to the Filename? prompt. If a file by that name already exists on the disk, the user is asked if the existing file should be replaced. When returning to the Edit File mode, *Atari Writer* puts you back exactly where you left off.

Printing

An interesting and useful function of *AtariWriter* is the ability to see on the screen what your printed document will eventually look like. This is the Print Preview option that formats your text file, page by page, on the screen as it will print on paper. You then view your text one "page" at a time through a 36-character by 21-line window that may be scrolled vertically or horizontally through the page.

The final command on the menu is for printing. The first time a document is printed, you are asked to choose from the following list of printers: Atari 1025, Atari 825, Atari 820, and Atari 822. If you have a non-Atari printer, you must select the Atari 820. For the remainder of the session, the program remembers the printer that you have selected.

If you have a non-Atari printer, you will be unable to use the built-in printer control codes like CTRL-U for underlining and SELECT-E for elongated (double-width) printing. However, control codes may be inserted directly within the text by means of the CTRL-O command. In any case, the Print File command lets you start and finish at any page and get up to 99 copies of your document.

According to the manual, a printer driver will soon be available that will permit you to store a file on your data disk that will boot automatically when DOS is loaded. This file will contain the codes needed for underlining, super- and subscripting, and the printer fonts that your printer supports. This will allow you to use the features of your printer without inserting a series of complicated and lengthy control codes.

Originally, the Atari Program Exchange (APX) was to supply these printer drivers soon after *AtariWrite* was released. As of this writing, Atari does *not* plan to supply the printer drivers as promised. Once again, Atari refuses to acknowledge the existence of (or support) non-Atari products.

Summary

My overall impression of *AtariWriter* is positive. It has good error trapping, is very easy to use and understand, and can be used with the cassette recorder. Powerful features like file merging and chain printing are supported. The Print Preview function is a unique and useful method of overcoming the limitations of a 40-column screen.

Nevertheless, this word processor needs a printer driver. Without it, *AtariWriter* is only the best Atari product to be released in a long time. With a printer driver, *AtariWriter* will be the best Atari word processor for the majority of Atari computer owners. □

The Nation's Model Urban School District Prepares for the Future.

Duval County Public Schools Implement Radio Shack's TRS-80® Color Computer

The Blueprint for Academic Excellence

The Duval County Public Schools Receive Recognition for a Model Year

Amid the concern for public education in America, the Duval County public school district in Florida has been the recipient of many awards and substantial national recognition. Following a request from the U.S. Department of Education in 1982, the prestigious Danforth Foundation selected Duval County Public Schools as a national model urban school district. As a result, the Duval County school system has received nationwide recognition from the news media and educational organizations.

Attention Earned Through Achievement

For Duval County Public Schools, the Danforth award is a culmination of awards from various academic competitions. In addition to winning numerous state matches, Duval County won the second and third annual National Academic Super Bowls. And it was a Duval County public school that represented Florida in the U.S. Academic Decathlon, placing fifth among teams from 27 states and three foreign countries. Such achievement is also reflected on student test scores. On the State Student Assessment Test, scores have increased 47% in mathematics and 13% in communications between 1977 and 1982. On the nationally-normed Stanford Achievement Test (below), elementary students have scored above the national average for six straight years, senior high students for the past three years, and junior high students improved the most by reaching the national average last year.


1976
Important Areas of Progress
1982
More graduates attended college/school full or part time.
The number of truant students dropped 26 percent.
The percentage of school dropouts decreased by 31 percent.

Determination to Improve Education

The Duval County Public Schools have not always been a model of success. In fact, as recently as six years ago, behavior problems and low test scores plagued the Duval County school system. Then a district-wide improvement program based on strict academic and disciplinary standards was implemented; and the change has been remarkable. Improvements include providing students with peer tutoring and special help sessions during lunch breaks, both before and after class, and for two hours on Saturday mornings. District-wide "theme" programs have also been implemented. In 1981, a "Courtesy is Contagious" campaign emphasized respectful student behavior toward teachers and fellow students. The traditional values of courtesy, respect and patriotism infected schools, students, staff members and the entire community. Last year a "Learn to Learn" program stressed the improvement of study skills and work habits. A Homework Hotline and a School-Based Homework Assistance program were implemented to encourage students to keep their books open after regular classroom hours.

Preparing Students for the Future

The Duval County Public Schools continue to upgrade the quality of education. To prepare students for the information age, the school system is implementing TRS-80 Color Computers in its classrooms.

Stanford Achievement Test Countywide Mean Percentile Scores

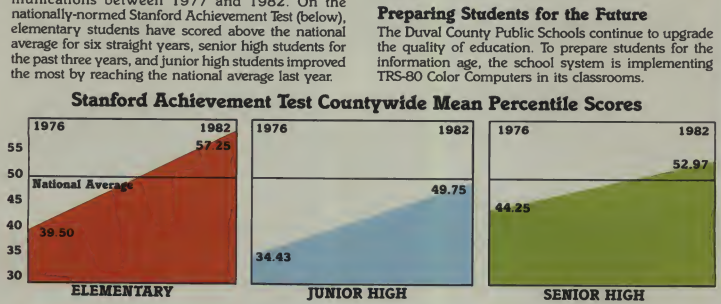

Computers Ente
By Design, n

The Nod of Approval. To provide students with the best computer education possible, Duval County Public Schools performed an exhaustive review of various microcomputer manufacturers. In the end they chose Radio Shack. According to Superintendent Herb Sang, Radio Shack provided the Duval County schools with "quality computer products, full support, and prices we could afford."

Color Computer Labs. Duval County presently has Color Computer labs in 28 elementary schools. Each lab consists of 15 Color Computers joined in a cost-effective network. By the fall of 1984, computer labs will exist in all 96 Duval County elementary schools. In addition to the instructional use of the Color Computer, a TRS-80 Model 12 will be placed in each elementary school to be interfaced with the school district's Student Information Management System. This connection with the district's mainframe computer will permit the Duval schools to easily send and receive student information to the central data base. Records previously kept on paper can be stored, updated and retrieved electronically—which saves valuable time.

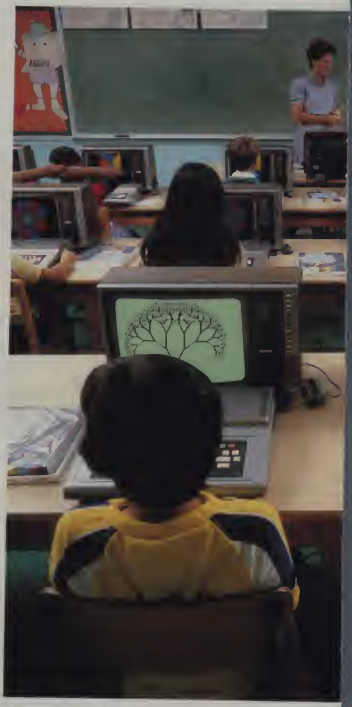

An Open Program. The Duval County public school sys
learn from its computer project. There are demonstratio
teachers in the school system are given the opportunity
lab. In addition, parents are welcomed to the sites for a
parents can provide further input on educational applic
of how to supplement their home computer applicati

r the Classroom
ot by Chance

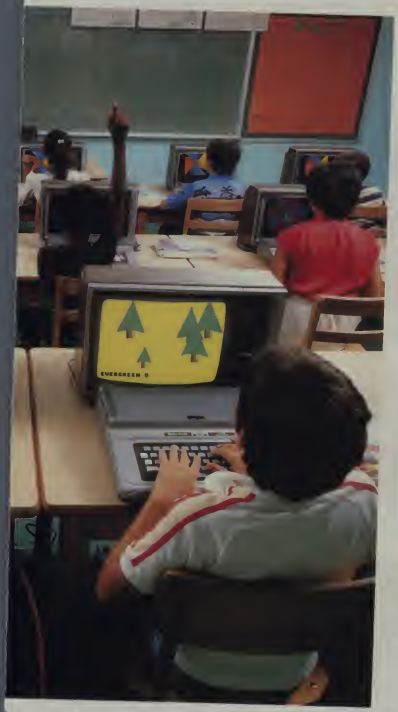

tem encourages teachers, parents and other school districts to
n sites in each of its five administrative areas. All elementary
to receive in-service training in the operation of a computer
a computer literacy training program. Through observation,
ations with the computer. They also can become more aware
ons with educational ones.

Pursuing Objectives Compatible with a New Age. Duval County Public Schools clearly see the importance of the computer in our everyday lives. It is the school system's purpose that students will have at least a basic understanding of the functions and uses of the computer, how it is programmed and what its impact is on society. In addition, students can develop their logic by utilizing the systematic processes required in programming. And through the use of Computer Assisted Instruction (CAI) courseware, students can develop other fundamental skills as well as acquire knowledge of various subjects.

Color LOGO Learning Lab. With the development of computer literacy as a major objective, the Duval County school system selected Color LOGO as the primary programming language for elementary computer study. Through manipulation of a "turtle" on the computer screen, young students learn to program, develop problem-solving skills, grasp graphic relationships and gain valuable insight into advanced mathematical, geometric, logical and programming concepts.

Members of The Team Behind Putting Computers In Front of Duval County Students

Jack Nooney, School Board Vice Chairman. "We must provide young people with skills needed to function in a world dependent on computers."

Herb Sang, Superintendent. "The use of computers will be just as important to a student's education as reading, writing and math."

Wendell Holmes, School Board Chairman. "I believe that preparing students for the information age should be a top priority in education."

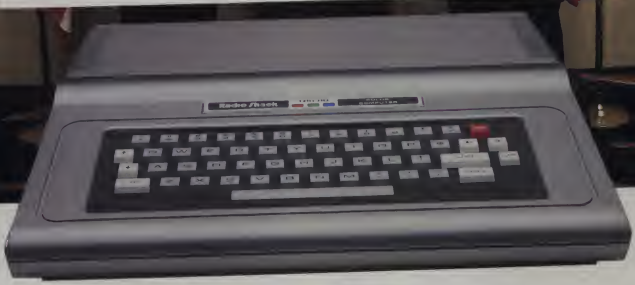

A Model Computer for a Model School District

Through an arrangement between Tandy Corporation/Radio Shack and the Duval County Public Schools, educators nationwide will be able to view one of the most effective uses of computer technology for instructional purposes to be found anywhere. Duval County has been established as a national model urban school district, and the addition of the microcomputer centers at the elementary level will only serve to maintain this district's leadership role in education. Duval County officials look forward to long-term educational benefits as a result of their commitment to computer learning environments; benefits which include implementation of the Color LOGO language for elementary grade levels, instructional software to supplement existing subject study and creative approaches to learning and study skills.

RadioShack's TRS-80® Color Computer Ideal for Any Classroom!

Configurable to Your Budget and Needs. Our affordable Color Computers offer both price and feature flexibility for your particular budget and instructional needs. Choose the Standard BASIC Color Computer or the Extended BASIC Color Computer. Use either computer with our wide variety of Program Pak™ and cassette tape courseware. And you can expand with one or more external disk drives to use our powerful disk courseware. With a Network 2 or Network 3 Controller, you can share the learning experience by connecting up to 16 non-disk student stations to a "host" disk computer.

Building Skills Needed for a New World. The Color Computer is an ideal system for introducing students to computer terminology, interaction and programming. The BASIC programming language is built into the Color Computer, and Color LOGO—a language designed to help students grasp fundamental concepts by programming a "turtle" on the screen to do graphics—is available on Program Pak or disk. Our Computer Assisted Instruction courseware provides information, exercises and feedback to supplement the teacher's lessons. For example, one of our CAI courseware packages includes high-resolution graphics and recorded speech to provide facts about our solar system. Another presents six laboratory experiment simulations where students control variables and view the changing results. We also offer courseware packages to supplement instruction in math, science, history, reading and language arts and computer literacy. In addition, our authoring systems make it easy for teachers to develop their own courseware.

For the name of your Regional Educational Coordinator, call 800-433-5682, toll free. In Texas, call 800-772-8538.

Radio Shack®

The Name in Classroom Computing™

A DIVISION OF TANDY CORPORATION

FC-0611

©1983 Tandy Corp

Apple Writer II

Stephen Arrants

Word processing is intensely personal. Loyalty to a package sometimes exceeds loyalty to one's political party. *Screenwriters* don't talk to *Wordstars*, an *Executive Secretary* is never seen out with a *Bank Street Writer*.

And those *Apple Writers* . . . a real breed apart. Imagine using a word processor from the manufacturer of your computer! Aren't hardware manufacturers the worst software publishers? They spend so much time and money to develop the hardware that software is often an afterthought. The "special" software is often thrown in to "sweeten" the deal. After all—you need something to run on your new computer, don't you? By the time you find out that the "free" software is about the worst imaginable, you have probably moved on to games and adventures.

Happily, *Apple Writer II*, redesigned for the new Apple IIe, is one of the best word processing packages around. *Apple Writer* is one of the original word processors. It has been improved and updated a few times, but in its latest incarnation, it takes full advantage of the redesign of the Apple, both inside and out.

creative computing
SOFTWARE PROFILE

Name: Apple Writer II
Type: Word Processor
System: 64K Apple IIe, 80-column card optional
Format: Disk
Language: Machine language
Summary: One of the best word processor packages available for the Apple.
Price: $195
Manufacturer:
Apple Computer, Inc.
20525 Mariani Ave.
Cupertino, CA 95014

Enhancements

Cursor movement is much easier. Instead of a complicated ESC sequence, the four arrow keys move the cursor up or down one line or left and right one character. An arrow key used with the Solid-Apple key moves the cursor by word or 12 lines up or down. Using the Open-Apple key with the left or right arrow will copy text into a buffer for later insertion.

A DELETE key, now present on the keyboard, functions as a destructive backspace—anything deleted is gone forever. CTRL-W can still be used to delete text and store it in a buffer.

If at any time during use you need help, just type Open-Apple-? As long as the *Apple Writer* master or backup is in drive one, help screens on all aspects of *Apple Writer* use will be displayed.

Apple Writer II detects the presence of an 80-column card and sets the display for this mode. If you have a color monitor, the 80-column display looks shabby. This is because of the way a color monitor translates the display signal to the screen. Use the 40-column display when using a color monitor. If you still use a TV set as a monitor, the 80-column display can't be used. The card is not an absolute necessity, however. *Applewriter II* works fine with a 40-column display.

The display is a bit different. The data line may be toggled to a display of tab stops or no display at all, save text. The data line shows you in which direction *Apple Writer II* will seek in find and replace modes, available memory, document length, cursor position, tab position, and file name. Press ESC once and a tab stop display replaces the data line. Press ESC once more and all data lines are suppressed. Another ESC brings you back to the data line.

Retrieving repetitive terms from a glossary used to be an involved operation. You pressed CTRL-G and then the character designating the word or phrase. With *Apple Writer II*, you just press Open-Apple and the letter designator.

Commands are for the most part mnemonic, such as CTRL-S for save, CTRL-L for load, CTRL-F for find/replace, and CTRL-C for case change. A few are not—CTRL-O for DOS commands, for example. All are CTRL plus one key commands. A prompt then appears at the bottom of the screen asking for a file name, material to search for, etc. If you wish to load a file, but you don't remember its name, enter ? at the prompt. A disk catalog is displayed followed by the load prompt. Find the file, enter its name, and it is loaded into memory.

Do you wish to examine a file without loading it into main memory? Just enter

the file name followed by a \ and the file is displayed. Pressing RETURN brings you back to the original file. This is useful when you want to examine earlier versions of a file without erasing the file on which you are working.

Underlining is much easier with *Apple Writer II*. In previous versions, you enclosed the text to be underlined with the \ character which was available only via a special key sequence. To underline between words, another key sequence was required. *Apple Writer II* does away with those complications, since the \ key is now on the Apple IIe keyboard. For example, to underline the words Apple Writer, you enter \Apple Writer\. Everything between the two backslashes is underlined, including spaces. To underline words only, enter a \ at the space: \Apple\Writer\ would underline only the two words, not the space between them. One other underlining improvement is that of a variable underline token. You may switch the specific token to whatever you wish. It can be a \, *, <, or almost any other character that makes sense to you.

As usual the documentation is about the best around.

Setting other printing commands is just as easy. CTRL-P brings you the Print prompt. Enter a ? and the values are displayed on screen. Enter the command and the value you wish to change. Press RETURN and you are back in the text mode. Print values may also be changed in text.

Suppose you wish to indent a block of text and have it single-spaced, for a long quote. Just enter a period followed by the command and its new value on a separate line. When you are done, just enter new values.

Word Processing Language

Included with *Apple Writer II* are special programs written in WPL, Word Processing Language. This language allows the creation of special programs which let you create form letters and mailing lists to do away with repetitive tasks. Some of the programs included on disk are a word counter, which counts the number of words in a specific document; a print value program, which aids in the setting of values for your display or printer; a spooling program, which lets you print several texts together; a form letter creator; and a program to convert *Apple Writer 1.1* programs to an *Apple Writer II* format.

Learning WPL isn't easy, but it can be done. A complaint about earlier versions of *Apple Writer* was that WPL was never fully explained. For the most part, this has been cleared up. The people at Apple have done an excellent job explaining this sometimes frustrating aspect of *Apple Writer*.

Documentation

As usual, the documentation is about the best around. Apple has listened to users' complaints and suggestions, and the result is clear, readable, and anything but boring.

First, Apple split the documentation into two parts: a manual on *Apple Writer II* and a separate manual on WPL. Each feature of *Apple Writer II* is explained carefully with plenty of examples. Each chapter is designed as a tutorial, and everything discussed in a particular chapter is reviewed at chapter's end. If something didn't sink in the first time, going over the material at the end should help.

The manual on WPL is excellent. WPL is not only explained in clear and simple language, but instructions on writing your own WPL programs are given. Naturally, not every user will take advantage of this. Not every user needs to write individual programs. Then again, it is nice to have this information handy when you want to try to write your own WPL program.

What's Missing

There are still a few features missing. Microjustification of spaces isn't available, but to me that is a small point. After all, microjustification may make text look good, but it won't improve your writing! A spelling checker along the lines of *SpellStar* or *The Sensible Speller* would be another useful addition. But these are minor complaints.

I have used many different word processors, and *Apple Writer II* is my favorite by a wide margin. I still don't like Apple's policy of copy-protecting the disks. For $195, they should allow the creation of one or two extra backups. (Apple provides one back-up.)

You only license the software; you don't purchase it outright. If both disks become unusable within 90 days of purchase, Apple will provide a new copy. After that, you are on your own. I wouldn't be too worried though. I have gone through three copies of the older version. Each time, Apple sent a replacement for a small charge. I hope they continue this service.

Summary

In its latest incarnation, *Apple Writer II* is perhaps the best word processor for the Apple. It uses fully the design changes in the Apple IIe, making it one of the easiest systems to use. Although learning all its tricks may take a little time and effort, I think you will be amply rewarded.

Apple Writer II is currently available as part of the Apple IIe introductory package. If you bought your IIe without *Apple Writer II*, seriously consider adding this excellent package to your library. □

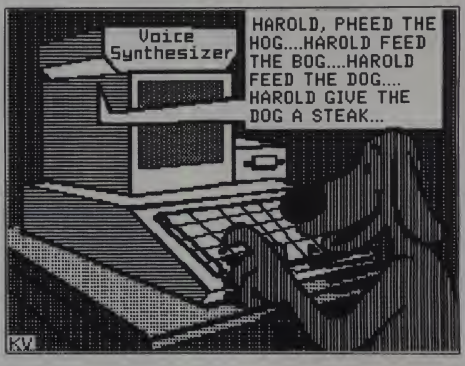

Ed·u·ware
(ej' o͞o wâr) *n.*
The first name in learning.

THE SCIENCE OF LEARNING™
Professionally designed instruction in specific academic skills for ages 4 through adult.

Elementary Mathematics

Introduction to Counting presents young children with the concepts of numbers, addition, subtraction, shape discrimination, weight, height, and measurement. *Apple, Atari disk $39.95. Atari tape $29.95.*

Arithmetic Skills teaches basic number skills. High resolution graphics, animation, and sound effects make counting, addition, subtraction, multiplication, and division interesting. *Apple $49.95.*

Fractions builds and reinforces skills in working with fractions. Definitions, numerators, denominators, addition, subtraction, multiplication, and division are explained in small increments and a learning manager makes the program flexible to meet the needs of individual learners. *Apple $49.00.*

Compu-Math™ Fractions, a comparable *Atari* program is also available. *Atari disk $39.95. Atari tape $29.95.*

Decimals presents addition, subtraction, multiplication, division, rounding off, percentage and conversion as they apply to decimals. *Apple $49.00.*

Compu-Math™ Decimals, a comparable *Atari* program is also available. *Atari disk $39.95. Atari tape $29.95.*

Advanced Mathematics

Algebra, volumes 1 through 6 is a series of independent programs comprising a first-year course in algebra. Concepts are presented in four distinct learning styles so that self-managed learning is encouraged. Volumes 1 through 4: *Apple, IBM PC $39.95 each.* Volumes 5 and 6 (sold as a set): *Apple, IBM PC $49.95.*

Language Skills

Spelling and Reading Primer™ uses simple words and pictures to introduce basic reading and spelling skills. Word groups cover simple two- and three-letter words through difficult multi-syllable words, double vowels and consonants, and directions and numbers. *Apple $39.95.*

Compu-Spell™ builds spelling skills in a tutorial format. A system diskette can be used with six different data diskettes geared to vocabulary for grades 4, 5, 6, 7, 8, and an adult level containing words commonly misspelled in business. System Diskette: *Apple $29.95.* Data Diskettes: *Apple $19.95 each.*

Compu-Read™ improves reading speed, recall, and test-taking skills. The system adjusts itself to your learning requirements and provides detailed information on progress and reading rates. *Apple, Atari disk $29.95. Atari tape $24.95.*

PSAT Word Attack Skills and **SAT Word Attack Skills** develop specific vocabulary skills in definition, connotation, roots and prefixes, and application. Test-taking skills required for the Scholastic Aptitude Tests are sharpened. *Apple $49.00 each.*

PSAT/SAT Analogies develops skills tested in the analogies portion of college entrance examinations. Word relationships, meanings, and achieving under test-taking conditions are stressed. *Apple $49.00.*

Introduction to Poetry presents rhyme and meter in a clear and simple tutorial format. Definitions are given on the screen and are sounded out by your computer. The program is highly interactive and easy to operate. *Apple $39.95.*

Computer Skills

Hands On BASIC™ Programming combines hand-holding software with a 200-page tutorial that steps the novice through beginning BASIC programming. This complete learning system won't leave you hanging with an error message. Special features allow you to diagnose the problem and correct your mistake. *Apple $79.00.*

DRAGONWARE™
Entertaining, colorful, animated games with lasting educational value, for ages 4 through 10. Webster, our wise and wonderful dragon, is your child's companion in the adventure of computer-based learning.

Spelling Bee Games™ contains four fun activities in which hand/eye coordination, memory skills, and motor skills are exercised. Twenty-two word lists covering simple two- and three-letter words through multi-syllable words provide variety and scope. *Apple, Atari disk $39.95.*

Webster's Numbers™ is a magical place where mosquitoes in mazes, balloon races, building blocks, and boxes teach pre-school children the basics of counting. *Apple $39.95.*

INTERACTIVE SIMULATIONS™
Realistic recreations of real-world adventures where scientific evaluation yields the solution.



Rendezvous makes you the pilot of a true-to-life space shuttle. Your mission is to dock with an orbiting space station. *Apple, Atari disk $39.95.*

INTERACTIVE FANTASIES™
Science fiction adventure games that challenge the intellect and startle the imagination.

Prisoner 2™ In a surrealistic environment of misleading clues and sugar-coated propaganda, you survive by your wits alone. Escape without divulging the information your captors desire. Can you escape? Can you even find the bars? *Apple $32.95. Atari disk, IBM PC $39.95.*

Empire I: World Builders™ Struggle to tame a gallactic wilderness and establish an infant Empire's first colonies. Stand at the edge of the new frontier. *Apple $32.95.*



Empire II: Interstellar Sharks™ Dodge the bureaucracy and pursue ultimate success in a high-tension, intergallactic entrepreneurial arena. Making it depends on how well-equipped you are to meet the onslaught of those in power. *Apple $32.95.*

Empire III: Armageddon™ The end of a once great Empire now torn by rebellion, poverty, corruption, and an unfeeling authority. Where do your loyalties lie? *Apple $32.95.*

For more information or the dealer nearest you contact:

EduWare Services, Inc.
28035 Dorothy Drive
PO Box 22222
Agoura Hills, California 91301
213/706-0661

The Science of Learning, DragonWare, Interactive Simulations and Interactive Fantasies are trademarks of Ed.u.Ware. Ed.u.Ware is a registered trademark of EduWare Services, Inc. Apple is a trademark of Apple Computer. Atari is a registered trademark of Atari, Inc. IBM PC is a trademark of International Business Machines.

EDUWARE®

CIRCLE 155 ON READER SERVICE CARD

We've got a hit on the charts.

One picture is worth a thousand words. Or numbers.

Now there's a simple way to transform pages and pages of business data into a single, dramatic format.

Introducing DR Graph™—high quality business graphics software from Digital Research.™ It lets you create impressive business charts, graphs, or any combination of both—quickly and easily. You can even build graphs from electronic spreadsheets such as VisiCalc® and SuperCalc.™

See what you're creating, instantly.

Think of it as painting by numbers. Because DR Graph actually lets you create your graph step-by-step.

First, enter the data you wish illustrated. Then just choose from the menu, hit a key, and take a quick look at what you've created—instantly.

Make your axes thick, your border lines thin. Go with solid, or broken grid lines. Add color when and wherever you please for all your special reports. It's easy to experiment until the graph format is perfect. Then DR Graph can print it, plot it, or store it for future use.

You get the versatility you need.

DR Graph lets you convert business data into dozens of personalized choices. Do you like your bars vertical or horizontal, stacked or clustered? How about adding line curves to your bar graph? Or special labels on the axis? With DR Graph, you've got it. All with the simple stroke of a key. DR Graph even displays up to four different graphs on a single page.

Multiple graphs on a single page.



Combine bar and line graphs with a simple keystroke.

Pie charts with exploding slices add impact.

Create clustered bar graphs.

Tap a key and vertical bars turn horizontal.

Mix words with your pictures.

DR Graph lets you write comments on your graphs, too. You not only control the size and color of the type, but also have four different typestyles to choose from. Write your own legends and titles. Or add additional text right onto the graph—exactly where you want it.

Plus, its 8 color and 6 pattern fills provide customized highlighting. So, your presentation graphs will be as professional as you are.

All the business graphics you'll ever need, ready to roll.

DR Graph works with today's leading microcomputers, as well as with a wide range of printers and plotters. All you need is Digital Research's GSX™ graphics enhancement for your computer's operating system. Contact your computer manufacturer, or stop by the CP/M Library™ at your computer shop for an eye-opening demonstration. Call 800-227-1617, ext. 400 (in California 800-772-3545, ext. 400) for a free, full-color brochure.

Coming soon! CP/M '83 East in Boston, September 29–October 1

DIGITAL RESEARCH™

The best of everything in business graphics.

VisiCalc is a registered trademark of VisiCorp. SuperCalc is a trademark of SORCIM Corporation.
The logo, tagline, DR Graph, GSX and CP/M Library are either trademarks or registered trademarks of Digital Research Inc. ©1983 Digital Research Inc.

CIRCLE 150 ON READER SERVICE CARD

Our Readers Use More Software

Did you know that nearly 90% of the readers of *Creative Computing* use a computer regularly, and that the average reader has $4230 invested in his personal system? Of this, $647 is in software. Moreover, our average reader plans to spend an additional $530 on software in the coming 12 months.

Nearly 88% of our readers buy off-the-shelf software for their personal use. For what? For everything! Games are used by 62% of our readers; word processing, 53%; languages other than Basic, 32%; storing and analyzing data, 22%; simulations and models, 17%; household accounting, 17%; education, 16%; graphics, 15%; communications, 15%; and scores of others.

At work, 43% of our readers use their computers for information storage and retrieval, 38% for word processing, 34% for education, 22% for modelling and forecasting, 17% for data communications, and 12% for accounting.

The average *Creative Computing* reader is college educated, 37 years old, has a household income of $43,840 and uses his computer on a daily basis.

So if you have a great software product to sell and want to reach nearly a third of a million qualified buyers, you should be advertising in *Creative Computing*.

creative computing

System Saver™

The most important peripheral for your Apple II and IIe.

For Line Surge Suppression

The SYSTEM SAVER provides essential protection to hardware and data from dangerous power surges and spikes.



By connecting the Apple II power input through the SYSTEM SAVER, power is controlled in two ways: 1) Dangerous voltage spikes are clipped off at a safe 130 Volts RMS/175 Volts dc level. 2) High frequency noise is smoothed out before reaching the Apple II. A PI type filter attenuates common mode noise signals by a minimum of 30 dB from 600 khz to 20 mhz, with a maximum attenuation of 50 dB.

For Cooling

As soon as you add 80 columns or more memory to your Apple II you need SYSTEM SAVER.

Today's advanced peripheral cards generate more heat. In addition, the cards block any natural air flow through the Apple II creating high temperature conditions that substantially reduce the life of the cards and the computer itself.



SYSTEM SAVER provides correct cooling. An efficient, quiet fan draws fresh air across the mother board, over the power supply and out the side ventilation slots.

For Operating Efficiency

SYSTEM SAVER contains two switched power outlets. As shown in the diagram, the SYSTEM SAVER efficiently organizes your system so that one convenient, front mounted power switch controls SYSTEM SAVER, Apple II, monitor and printer.



Available in 220/240 Volt 50 Hz



The heavy duty switch has a pilot light to alert when system is on.You'll never use the Apple power switch again!

Easy Installation



Compatible with Apple Stand

$89.95 at your local dealer or order direct by phone or mail.
For phone or mail orders include $2.50 for handling. New York State residents add sales tax. VISA and MASTERCARD accepted.
Dealer inquiries invited.

Kensington Microware Ltd.
919 Third Avenue, New York NY 10022
(212) 486-7707 Telex: 236200 KEN UR

KENSINGTON MICROWARE

CIRCLE 203 ON READER SERVICE CARD

creative computing software evaluation

Educational Programs For The Very Young

Brian J. Murphy

If you are the parent of a young child and also the owner of a personal computer, you are in an excellent position to give your child a painless and entertaining introduction to reading, writing, and numbers—and to using a computer.

The trick is to find software that is easy for a child to use successfully, that will not put so much pressure on your little one that he becomes discouraged.

Perhaps even more difficult is finding software that teaches skills that are worth having and that do it in a consistent, entertaining manner.

The packages reviewed here are, in my opinion, worthwhile on all counts. Let's start with programs suitable for the very young.

Early Games For Young Children

The first is John Paulson's *Early Games for Young Children* released by Counterpoint Software. This set of games allows very young children to approach the computer in a relaxed, low pressure atmosphere. The emphasis is on enjoyment.

Brian J. Murphy, 133 Post Rd., Fairfield, CT 06430.

creative computing
SOFTWARE PROFILE

Name: Early Games for Young Children

Type: Math and Language learning games

System: 48K Apple II, II Plus; disk drive

Format: Disk

Language: Applesoft

Summary: Good games for the very young making their very first approach to a computer.

Price: $29.95

Manufacturer:
Counterpoint Software Inc.
Suite 140 Shelard Plaza North
Minneapolis, MN 55426

Nine games are available in the Apple II version we examined: Match Numbers, Match Letters, Count, Add, Subtract, Alphabet, Names, Draw, and Compare Shapes. The programs are selected from a low-res graphics "picture menu." All the child has to do is hit the spacebar when a picture of the game he wants to play comes on screen.

The game that a young child will probably find most entertaining is Draw. In this game the child can place low-resolution graphics shapes on the screen just by pressing single keys on the keyboard. Some keys draw horizontal lines, others vertical and diagonal. The colors are changed by strokes of the spacebar.

For the very young user, help and encouragement from Mom or Dad will make this game more rewarding. Hint: Don't expect your baby to draw neat little pictures of houses and trees the first time out—or ever, for that matter. Remember, this is supposed to be entertainment. Encourage your child to doodle, to enjoy the colors and shapes that appear on screen.

If your child is especially happy with his artwork, use the save feature to record

Early Games for Young Children

Early Games Music

the picture to the program disk. This will not only preserve your youngster's masterpiece but will also reinforce his positive feelings about himself—especially if it is you who suggests saving the picture.

Compare Shapes

In the Compare Shapes game, graphics are once again used to good advantage, this time to help the child to develop skills in evaluating visual information and drawing conclusions from it. The child is confronted with four shapes numbered 1 through 4. The idea of the game is to key in the number of the shape which differs from the other three. Again, parents will have to help very young children, but most should catch on quickly. Basic visual, problem solving, and analytic skills are emphasized here.

Match Numbers And Match Letters

Two more entertaining and useful games on this disk are Match Numbers and Match Letters. In these games the child is shown a large number or letter drawn on the low-res screen. To play, he simply keys in the character which matches the display on the screen. That is the whole game, and for the purposes of entertainment for a preschooler, it is fine.

For learning purposes, the child is given practice using the computer keyboard and a chance to become familiar with the symbols on it.

On the minus side, it must be observed that there is no counting involved with the numbers and no phonetics included with the letters. Mom and Dad must supply this supplementary material, but it is well worth the effort, of course, since the child will probably show an early eagerness to know what these symbols are all about. Take advantage of that opportunity.

Add and Subtract

Add and Subtract, the arithmetic games, are not as well thought out as the other games on this disk and may be a little frustrating for a preschooler. Add and Subtract presuppose skills in understanding numbers that are more typical of Kindergarten and Grade 1 students than preschoolers. To succeed with these games requires that your preschooler have some arithmetic tutoring at home.

On the low-res screen, the child sees several blocks and an add or subtract function symbol followed by more blocks representing the number to be added or subtracted. This is what teachers call a problem in whole numbers—the level on which a child first understands the concept of quantities. If the problem were to be kept on a whole number basis, the child would solve the problem in terms of graphics—by drawing or erasing blocks.

That is not the case in these games. To solve the problem the child must follow several steps. First he must translate the purely graphic information he sees on screen into verbal form (three plus two), then make the leap from verbal language to symbolic language (3 + 2), perform the arithmetic, then select the correct numeric character on the computer keyboard to respond correctly.

As the child plays, the screen fills with lines, angles, and boxes.

Making these conversions is no challenge to a grownup; adults make the transitions from whole numbers to verbal expressions to symbols instantaneously and without conscious effort. But for a preschooler, with at best a shaky understanding of whole numbers, these games could prove frustrating without adequate preparation and adult involvement.

These are not good "first games" for a very young child. If the correct responses could have been made by adding or subtracting blocks on the graphics screen, thus keeping things on a whole number basis, the Add and Subtract games would have been much more appropriate—and valuable.

Counting

In Counting the child is shown a number of blocks and must choose the number symbol on the computer keyboard which correctly describes the quantity on screen. The arithmetic function of Add and Subtract is not included, making the game a little easier. What is required is counting out and, again, the transition from whole numbers to verbal expressions and then to symbols.

The support of an adult is again crucial for the games to be of real benefit. Otherwise the child will simply hunt and peck across the keyboard looking for the correct response until he stumbles across it. That is neither entertainment nor education.

Names

Names is an entertaining game which uses a child's inborn fascination with himself to provide the motivation. The child types in his name and is then asked to spell it, providing practice in typing. A correct response is rewarded with a jazzy low-res graphics recapitulation of the spelling. The routine ends with the child keying in his name again for the same reward. If a more intense learning experience is desired, parents can help children to sound out the names as they are keyed in and as the program spells them on screen.

Alphabet

Alphabet is a cute little routine which efficiently and painlessly performs the task of teaching the alphabet. The game starts with a big, low-res A and waits for the child to key in the next letter in the alphabet. As long as the child makes correct responses, the progression of graphics letters proceeds uninterrupted. If the child makes a mistake, the alphabet up to the point of the error is recapitulated in the text window at the bottom of the screen. This gives the child a chance to sing his ABC song and figure out what the next letter must be. This is a nicely thought out, entertaining and simple game that should easily hold the interest of a child.

Early Games Music

Early Games Music is a companion program package which is designed to give preschoolers their first introduction to music through the medium of enjoyable games. As with the learning games on the previous disk, the child can select the various programs in the package from a picture menu.

creative computing

SOFTWARE PROFILE

Name: Early Games Music

Type: Music learning games

System: 48K Apple II, II Plus; disk drive

Format: Disk

Language: Applesoft

Summary: Games for preschoolers well designed to foster an early interest in music.

Price: $29.95

Manufacturer:
Counterpoint Software Inc.
Suite 140 Shelard Plaza North
Minneapolis, MN 55426

One of the programs, Kaleidoscope, should prove popular with young users. For each stroke of a number key a musical note is played and a graphics shape appears on the low-res color screen. As the child plays, the screen fills with lines, angles, and boxes. This game provides a good "hook" for the more serious activities available on the disk.

In Guido's Quiz (named after the eleventh century monk who named the notes of the musical scale) the screen displays piano keyboard, a bass clef, or a

An introduction to the modern art of programming using the ancient art of drawing.

DELTA DRAWING™ Learning Program lets kids enjoy drawing and coloring while they learn computer programming concepts. Even kids who have never used a computer before can learn to write simple programs and develop an understanding of procedural thinking. It's easy, clear, and fun!

With DELTA DRAWING you use single-key commands to create a picture. Press "D" to draw; press "R" to move right. And, as you draw, DELTA DRAWING keeps track of every command. So you can easily switch from your picture to the list of commands (a program!) that you've used to draw it. You begin by drawing pictures that produce computer programs, but soon you can learn to write programs that draw pictures.

DELTA DRAWING lets you save your pictures and programs on a disk or cassette. And you can print your drawings on a printer with graphics capability.

DELTA DRAWING Learning Program is available on disk for **IBM**® and **Apple**® computers, and on cartridge for **Atari**® and **Commodore 64**™ computers.

Look for DELTA DRAWING at your local software retailer.

SPINNAKER™

We make learning fun.

Apple, IBM and Atari are registered trademarks of Apple Computer, Inc., International Business Machines Corp. and Atari, Inc. respectively. Commodore 64 is a trademark of Commodore Electronics Limited. DELTA DRAWING Learning Program is a trademark of Spinnaker Software Corp.
©1983, Spinnaker Software Corp. All rights reserved.

Alphabet Beasts and Co.

Learning About Numbers

treble clef, as you prefer, with all the notes named (the scale of musical notes, by the way, is named by single letters from A to G). As the program runs, a note disappears and a matching one is played on the speaker. The child must strike the appropriate letter key on the keyboard to respond correctly.

At first glance this does not seem like an especially challenging game. But consider the age of the children for whom it is designed and the likelihood that this is the first exposure they have had to keyboards and written music. It is then that the value of this gentle, no-pressure approach becomes easy to understand. This is a musical activity the child can succeed at and enjoy; it makes music fun and introduces concepts that will be valuable later on, especially if the child is to play an instrument.

The Perform/Record/Playback program allows the child to key in melodies at random. As the child keys in the music, the results are displayed on the video keyboard, treble clef, or bass clef, as the child wishes. This visual activity is eye-catching and helps to reinforce the concept that the tones the child is hearing have their counterparts on the keyboard and in written music.

If the child wishes, the music can be saved to the program disk and played back. As with the graphics save feature in the learning programs, your encouragement as a parent to the child to save his musical masterworks will help to enhance this positive learning experience.

Children are susceptible to the urge to make melodies, and the *Early Games Music* program offers a way for a beginner to try, with the Melody Tutor. This program plays like a Simon Says game. The notes played by the computer speaker are also displayed on the screen (in number form instead of letter form, unfortunately, but it is the only logical way to use the full range of notes provided in the program).

After the music plays and the notes are displayed, the program pauses to allow the child to imitate the sequence from the keyboard. If the child makes a mistake, the program replays the music and allows for a second try. This program really isn't a valid preparation for instrument playing; it simply gives the child an opportunity to play a recognizable tune, which of itself is a wonderful reinforcement of his interest in music.

The idea with the *Early Games* program packages is to provide very young children with first experiences at the computer keyboard that will entertain and teach. The packages succeed in that respect; they are a good introduction to the computer and to the subjects they teach for a preschooler.

Alphabet Beasts and Co.

When we all learned our alphabet, we learned it in pretty much the same way, by singing the alphabet song and having books read to us proclaiming, "A is for Apple, B is for Ball," and so forth. But did you ever imagine that B would stand for Baba Yaga the witch, I for Icarus, or D for Dragon?

Alphabet Beasts and Co. by Software Productions is not just an alphabet primer; it is an exotic collection of elves, mythical beasts, and characters from legend portrayed in some of the very finest hi-res color graphics ever concocted for an educational software package.

The disk is easy to use. After the initial boot, you simply select a letter, hoist your three-year-old onto your lap, and watch the colorful alphabet show unfold. Each time a letter is pressed, a little presentation appears on screen. First, there appears a hi-res illustration, then a little verse in which the subject letter appears. Here are two of the verses:

My new ROBOT, her name's Rose
I taught her all
The games she knows!
R is for ROBOT.

In a hut upon chicken feet
BABA YAGA the witch
Struts down the street.
B is for BABA YAGA.

These verses are, of course, meant to be read aloud to the child. For a beginning reader they are a good medium for practice in phonics—sounding out the words. Several of the verses repeat the sound of the letter over and over, giving you the

creative computing

SOFTWARE PROFILE

Name: Alphabet Beasts & Co.

Type: Alphabet, numbers primer

System: 48K Apple II, II Plus, IIe; disk drive

Format: Disk

Language: Applesoft, Machine language

Summary: Superb graphics, inventive approach make this a great tool to teach letters and numbers.

Price: $29.95

Manufacturer:
Software Productions
2357 Southway Dr.
P.O. Box 21341
Columbus, OH 43221

COMPUTERS ARE CREATING JOBS FOR NRI-TRAINED PEOPLE.



IF YOU'RE SERIOUS ABOUT MAKING MONEY IN MICROCOMPUTERS, NRI IS SERIOUS ABOUT SHOWING YOU HOW.

The U.S. Department of Labor projects job openings for qualified computer technicians will soon double. International Resource Development, Inc., estimates a 600% increase in these jobs in a decade. And most of these will be new jobs, created by the expanding role of computers.

NEVER HAS THERE BEEN A FASTER-GROWING FIELD OF TECHNOLOGY.

Many people are afraid of losing their jobs to computers, but thousands of jobs will be created for those who are prepared to meet the challenge.

With NRI training, you'll be prepared. You can have a profitable, exciting future as an expert who can handle the operational, programming and technical aspects of all kinds of microcomputers and microprocessors.

LEARN IN YOUR SPARE TIME.

NRI trains you in your own home, at your convenience...no classroom schedules to meet, no need to quit your job. As a class of one with complete course materials and the backing of a staff of professional electronics instructors, you'll get extraordinary hands-on training on the latest, most popular microcomputer: the new TRS-80™ Model 4 with Disk Drive. Designed to perform diverse personal and business functions and accept more software, the TRS-80 is yours to keep.

LEARN HOW TO USE, PROGRAM AND SERVICE STATE-OF-THE-ART MICRO-COMPUTERS.

Through your carefully designed NRI course, you'll get a wealth of practical experience. You'll build circuits... from the simplest to the most advanced...with your NRI Discovery Lab.® You'll use a professional 4-function LCD digital multimeter for analysis and troubleshooting. With NRI training you'll explore your computer's registers, memory and input-output ports. You'll even write programs to control the circuits you've designed and built. You'll perform hundreds of challenging experiments, always backed by a full-time faculty ready to help you personally.

When your NRI training is complete, you'll be a computer technician, ready for your first job — servicing, testing or programming all types of microcomputers — in a rewarding and challenging new career.

THE CATALOG IS FREE. THE TRAINING IS PRICELESS.

Send the coupon today for your FREE 104-page catalog. It's a valuable guide to opportunities and training in the high-tech revolution. You'll see how easily you become part of the growing high-tech world of microcomputers.

If the coupon has been removed, please write to us today.

Your NRI course will include the new TRS-80 Model 4 with Disk Drive or the TRS-80 Color Computer with NRI Computer Access Card...plus a professional LCD multimeter, NRI Discovery Lab and hundreds of demonstrations and experiments. It's all yours to keep.

TRS-80 is a trademark of the Radio Shack division of Tandy Corp.

All career courses approved under GI bill. ☐ Check for details.

175-103

NRI School of Electronics
McGraw-Hill Continuing Education Center
3939 Wisconsin Avenue
Washington, D.C. 20016

We'll give you tomorrow.
The catalog is free.
The training is priceless.

Please check for one free catalog only.
☐ Industrial Electronics
☐ Computer Electronics including Microcomputers
☐ Color TV, Audio, and Video System Servicing
☐ Electronics Design Technology
☐ Digital Electronics
☐ Communications Electronics • FCC Licenses • Mobile • CB • Aircraft • Marine
☐ Basic Electronics
☐ Small Engine Servicing
☐ Appliance Servicing
☐ Automotive Servicing
☐ Auto Air Conditioning
☐ Air Conditioning, Heating, Refrigeration & Solar Technology
☐ Building Construction

Name (Please Print) Age

Street

City/State/Zip

Accredited by the Accrediting Commission of the National Home Study Council

opportunity to emphasize the phonic value of the letter.

Here is an example for the letter M, a verse in which five of the words begin with that letter, giving you multiple opportunities to read and emphasize the M sound for your child.

At this very moment
Magic will be made
By Merlin the MAGICIAN.
M is for MAGICIAN

In connection with the opportunities for phonics practice, the program offers an ingenious animation of block printing for each letter in the text area under the individual illustrations. Three ruled lines are displayed to the bottom left of the screen, simulating ruled composition paper. Each letter chosen is drawn on that space, in just the manner a child would be taught in school. The child, having seen the picture and heard the verse read aloud, enters the appropriate letter from the keyboard, which begins the letter drawing process, complete with entertaining sound effects.

Watching this animation, a child might be easily motivated to take up the challenge and attempt to draw the letter himself. At that point you run to wherever you keep your papers and pencils and let your child have a go at it. Be patient and helpful as the child makes his first efforts; after all, what we are talking about is a head start in reading and writing.

One of the most delightful aspects of the program is the subject matter for the alphabet primer. A clever parent can use the subject matter of mythical monsters, elves, characters from Greek mythology, and all the other myriad magical manifestations as a departure point for many a fine session of storytelling and read-aloud.

Used with imagination, this program can be not just an introduction to the alphabet, but to the entire world of reading. The pictures are so beautifully executed and the subject matter so imaginative, that a child almost has to want to know more about them. That is your cue to bring out the appropriate storybook for a read aloud, read along session.

Number Tutor

Alphabet Beasts and Co. also includes a number tutor. All you have to do to access the numbers at any time in the program is to press one of the number keys. A fascinating little sequence which depicts the number in counting, verbal form, and numeric symbol will ensue.

First, the name of the number is written in block letters in an animation at the bottom of the screen. The Arabic number symbol is then written alongside the verbal expression. Then, in the graphics screen above, an animated fire-breathing dragon appears to create a picture of a dragon (or dragons) bent into the shape of the number symbol. Finally, one at a time, little dragons appear to the right of the graphics screen until the appropriate number is reached.

This number sequence not only introduces the three major ways of expressing a numeric value (whole number, verbal expression, numeric symbol), it also provides counting practice and, most importantly, the entertainment to sustain the interest of the child.

Rounding out this package is a cute game called Creature Features in which the child can create, on the hi-res graphics screen, creatures combining the various parts of a dragon, an alien, a genie, and a little boy. Once the creature is created, the program projects the figure into one of a number of settings, including a city landscape, the moon, a sidewalk by a schoolbus and—my favorite—at the dinner table to the astonishment of a typical mom and dad. There are 256 different combinations of monsters the child can make, which promises that the program will have the power to entertain and stimulate your youngster's imagination for extended periods.

Alphabet Beasts and Co. embodies all of the most important virtues one expects in educational software for the home. It has great graphics, it is well thought out, it is entertaining for children and for their parents, it stimulates the imagination, it is rich in subject matter; and it is easy to use. It also costs much less ($29.95) than many educational programs we have seen which attempt to teach the same material but which do not offer the same high level of beauty in graphics or imagination in overall design. *Alphabet Beasts* should find an honored place in the software libraries of many a home and school.

Learning About Numbers

Too many of the programs designed to assist in teaching elementary arithmetic are very well-intentioned and very clever without being well thought out or comprehensive. *Learning About Numbers* is an important exception to this trend.

Learning About Numbers is a math education program suitable for grades K through 3 from C & C Software. It is well designed as a game for very young children and as a tool for teaching the most basic concepts about numbers.

Let's Count

The simplest program in this package is Let's Count, a wonderful first introduction to numbers. In this game the child learns to count recognizable objects such as flowers, houses, and cars. At the simplest levels of the game, the activity is restricted to counting the objects on the screen. With each right answer the student gets, a happy face appears on the screen to reinforce the feeling of success and to inspire continued play.

As the student demonstrates proficiency in answering the problems (90% correct answers) the difficulty level increases. At this point the items to be counted are grouped in sets, with boxes drawn around each set to emphasize the groupings. This instruction in sets is an important preparation for the development of skills in addition and subtraction, and is an indication of the planning evident in this package.

Addition is phased into the game, using the sets. A typical addition problem in this set format works like this: First, a box with three flowers is displayed on the screen. The child counts the flowers and types a 3. A second box appears on the screen, this time with two flowers. The child counts, then types a 2. A box with five flowers is then shown, and the student counts the result and enters the correct number, 5, from the keyboard.

In this exercise the child has had practice in counting and exposure to the whole number approach to addition. He also benefits from the graphics which illustrate the processes of counting and addition for better understanding.

To make this exercise work, teacher supervision is crucial, especially for children using the program for the first time. The child will need guidance to understand that the number of objects on the screen, the verbal counting he must do to tally them, and the number symbol he must key in are related. Once that level of comprehension is reached, the

creative computing

SOFTWARE PROFILE

Name: Learning About Numbers Vol. 1

Type: Counting, arithmetic tutor

System: 48K Apple II, II Plus, IIe; disk drive

Format: Disk

Language: Applesoft, machine language

Summary: An intelligent methodical language approach to teaching counting that will engage and keep the interest of children.

Price: $40

Manufacturer:
C & C Software
5713 Kentford Circle
Withita, KS 67220

Using Your Brain Is Fun When You're Playing Quizagon!

Knowledge, strategy, luck...all are part of mastering this exciting, new type of game!

Over 6,000 questions explore and expand what you know about science, sports, entertainment and potpourri.

It's a family game. It's a party game. It's a game for people who want to challenge their minds.



Available for the IBM PC, Apple II, Commodore 64, and VIC-20 computers
For the name of your nearest dealer call 800-328-1223

CSI

counterpoint software, inc.
4005 west sixty-fifth street • minneapolis, mn 55435
(612) 926-7888 • (800) 328-1223

Stickybear ABC

Stickybear Numbers

child will find it easy to select the program from the picture menu and practice with it on his own.

Arithmetic Fun

The next level of math skills is represented in the Arithmetic Fun program for addition and subtraction. In this game, the child deals strictly with numeric characters. Reinforcement is provided by a rather interesting collection of hi-res graphics characters: a little prince locked in a dungeon, the troll digging his way to the dungeon to carry him off, and the little heroine trying to get to the dungeon to rescue the prince.

The child can choose to help either the troll or the heroine; each correct response brings his chosen character closer to the goal. This is a game that should easily hold the attention of children from grades K through 2.

As the child practices with this game, and as the number of correct responses increases, the skill level increases. There are nine levels of difficulty in all. At the first level, the first number added is from 1 to 3, the second from 1 to 2. If the child progresses to level 9, numbers 0 to 9 are used, as are multiples of 10. (In fact, multiples of ten begin to appear at skill level 4.)

The same prince-troll-heroine game format is used for the Arithmetic Fun multiplication game. In this game the skill levels begin with the multiplication or division of numbers from 1 to 3 by numbers ranging from 1 to 2. At the highest skill level, the numbers are from 0 to 9. Multiples of 10 appear in Level 3. Using the Educational Management routines provided in the package, the teacher can set time limits, ranging from 1 to 15 seconds, for the responses in these games. The teacher can also opt for no time restrictions at all.

Let's Tell Time

The final program on the disk is Let's Tell Time. On the graphics screen appear a clock face and a digital watch. Using the arrow keys, the child must move the hands on the clock face until they match the time displayed on the digital watch. Again, the difficulty of the problems posed is graded by skill level.

Each correct response brings his chosen character closer to the goal.

At the lowest skill level, the child must move the minute hand only five or ten minutes and the time shown is always on the hour. As the difficulty level increases, he must move the minute hand farther to half and quarter hour settings. At the fifth of the nine levels, some of the numbers on the clock face disappear, leaving 12, 3, 6, and 9 only. At the highest level of difficulty the times can be at any of the 12 five-minute intervals on the clock face.

In the Management program, there are several routines which assist the teacher in monitoring the progress of the student and in customizing the games to meet the needs of individual students or the class as a whole.

One of the options available includes keeping a roster of the students using the program. The roster tallies the number of program runs made by the student, the number of right answers, and the number of answers right on the first try. The teacher can erase the scores or change names on the roster as desired.

The Management program also allows the teacher to create a list of exclusive users, to turn graphics reinforcements and sound effects on or off, and to establish the requirements for advancement to higher skill levels within the arithmetic and counting games.

This program is extremely well thought out, both as entertainment to maintain the interest of children in learning and as a methodical and effective classroom aid.

Stickybear

Smokey the Bear, Yogi Bear, Paddington Bear, and Winnie the Pooh had better watch out. The computer era has given birth to the bear of the future, Xerox/Weekly Reader's Stickybear. He is the hero of some of the most polished educational software ever created for the Apple II.

More precisely, Stickybear is the central character of *Stickybear Numbers*, *Stickybear ABC*, and *Stickybear Bop*, software packages that not only educate as they entertain but do both exceptionally well. Stickybear and his family are the creations of children's illustrator Richard Hefter, realized in high-resolution color graphics. In *Stickybear ABC* Hefter's cast of characters helps to illustrate the alphabet using animation and sound effects creatively.

For once, the old cliche is valid: This program is so simple a child can figure it out. All you have to do is slip the disk into your drive, boot it up, and turn the keyboard over to your preschooler. Any letter he hits on the board will result in an animated graphic of an object that begins with that letter. If he keys W, he may see a windmill, or watch and listen as Stickybear blows a whistle. Hitting Q may result in a picture of a stately queen marching by, or a view of Stickybear sleeping snugly under a quilt.

BEFORE YOU DAMAGE YOUR COMPUTER, PLUG IT IN RIGHT.

INTRODUCING THE WIRE TREE™ AC SURGE PROTECTOR, FROM NETWORX™

Power surges and voltage spikes. Their causes can be as simple as someone opening your refrigerator, or running a power tool, or switching on a fluorescent light.

But their results can be devastating. They can wipe out your computer's memory. Even damage its sensitive circuits.

That's why smart computer users protect their personal computers by plugging them into The Wire Tree from Networx.





Voltage surge enters The Wire Tree. | Constant power output | R.F. interference enters The Wire Tree. | Filtered power output

The Wire Tree has four outlets and provides power surge protection that conforms to IEEE guidelines.

It comes with a bracket to mount underneath your desk or table and has a unique cable support feature which organizes your system's power cords into a neat bundle and moves them out of your way. And it lets you control system power from a single illuminated on/off switch.

You've invested a lot of time and money in your computer system. Protect that investment with The Wire Tree. Ask for one at your local computer store.

NETWORX

Networx, Brooklyn, N.Y. 11237 (212) 821-7555

CIRCLE 194 ON READER SERVICE CARD

PIED PIPER™

THE COMPUTER WITH THE STORY!

THE $1299.00 PIED PIPER™ STORY:

- AN INCREDIBLE 1 MEGABYTE OF FLOPPY DISK STORAGE CAPACITY!
- STANDARD 64K MEMORY – No need to buy extra memory boards
- FULL SIZED TYPEWRITER KEYBOARD
- PLUS AN ADVANCED SOFTWARE PACKAGE – Including the CP/M® operating system and business applications programs!

And it's portable! Weighing only 12½ pounds, the PIED PIPER™ goes where you go. The PIED PIPER™ computer is the total system solution you've been waiting for!

Combining value and performance in an attractive portable carrying case, the PIED PIPER™ complements your busy lifestyle. No other microcomputer offers more value for the money.

Remember the PIED PIPER™. What a Story!!!

Contact your local dealer or
PTM Electronics Corporation, 525 Middlefield Road, Suite 120,
Menlo Park, CA 94025 (415) 326-6226
PIED PIPER is a trademark of Semi-Tech Microelectronics Corp
CP/M is a registered trademark of Digital Research Inc
Video monitor must be purchased separately

CIRCLE 254 ON READER SERVICE CARD

Even for an adult, the temptation to go through the entire selection of 52 graphics is virtually irresistible. Any parent testing this package in a computer store will hardly be able to wait to bring it home to try it out on Junior. They never made ABC books like this when *we* were little.

creative computing
SOFTWARE PROFILE

Name: Stickybear ABC

Type: Educational

Systems: 48K Apple II or Apple III in emulation mode.

Format: Disk

Language: Assembly

Summary: Outstanding ABC primer with great graphics.

Price: $39.95

Manufacturer:
Xerox Education Publications
/Weekly Reader
245 Long Hill Rd.
Middletown, CT 06457

In addition to the disk, the package comes with an entertaining hardcover children's book by Hefter, "The Strawberry Look Book." This is not an ABC primer but a little vocabulary builder. The Stickybear family goes shopping in town, and the book illustrates and names all the things they see. Having been made receptive to the Stickybears by the program, a primary grade youngster should be ready for more of their adventures, and quite receptive to Mom or Dad reading the Look Book aloud or reading it on his own.

Further support and reinforcement comes in the package in the form of colorful Stickybear stickers which can decorate lunchboxes, toychests, etc. and a Stickybear ABC poster, suitable for display at home or in the classroom.

Stickybear Numbers

Equally handsome is the *Stickybear Numbers* package. It boots as easily as the alphabet program and operates similarly. The youngster simply selects a number and sees it illustrated in color graphics and sound. The major difference is that there are more shapes and picture formats to illustrate the numbers than in the ABC program offers for letters.

You see spinning hats, ice cream sundaes, Stickybears emerging from windows, airplanes, spaceships, furiously revolving planets, flying birds, stars, fish, boats, and so on. This apparently random use of shapes and picture formats makes *Numbers* even more exciting for a youngster than the ABC program. Of more value is the way that these shapes are animated. They are placed on the screen one by one to introduce and reinforce the concepts of counting.

As with the ABC program, there are

creative computing
SOFTWARE PROFILE

Name: Stickybear Numbers

Type: Educational

Systems: 48K Apple II or Apple III in emulation mode

Format: Disk

Language: Assembly

Summary: Super program for learning counting and numbers with wonderful graphics.

Price: $39.95

Manufacturer:
Xerox Education Publications
/Weekly Reader
245 Long Hill Rd.
Middletown, CT 06457

IF YOU'D RATHER BE SAILING, TRY SAMS BERMUDA RACE.
Now you can sail all-year round, without ever leaving the comforts of your home with Sams BERMUDA RACE – the new sailing software program for your Apple® computer. BERMUDA RACE is the ultimate test for any sailing enthusiast, novice or expert. So whether you race alone or against a competitor, you may be surprised to find out how good a sailor you really are. Or aren't. Either way, you're sure to enjoy the challenge and excitement of Sams BERMUDA RACE. To order or to get the name of your local software dealer, call 800-428-3696 or 317-298-5566. And ask for Operator 437.
Offer good in U.S. only and expires 2/29/84. Prices subject to change without notice. In Canada, contact Lenbrook Electronics, Markham, Ontario L3R 1H2
SAMS BOOKS AND SOFTWARE
HOWARD W. SAMS & CO., INC.

CIRCLE 219 ON READER SERVICE CARD

Stickybear Bop

supporting materials, including a color poster, stickers, and a hardcover book, "One Bear, Two Bears" in the package. The book serves the same purpose as the program; it introduces counting and addition and subtraction concepts at the most basic level. Again, this is a book that can be read aloud or read alone by the child. Interest is almost assured if the child is primed by a session on the computer.

Stickybear Bop

After a busy session with *ABC* and *Numbers*, parent and child deserve some recreation, and what better way to get it than by enjoying a session of *Stickybear Bop*, a pleasingly non-violent arcade game which Mom and Dad are as likely as their very small children to enjoy.

There are six rounds in the game, each with its own set of rules and requirements. You control a teetertotter board using single key commands or a paddle or joystick. When you key 1 or press the paddle 0 button, the board tosses a ball at one of the moving targets. In the various rounds you shoot at planets, stars, ducks, members of the Stickybear family, and so forth. Ten misses and you are out of the game.

In round one you aim at a shooting gallery full of targets; hit one with your ball and the target disappears in a puff of smoke superimposed by the legend BOP! It is comic and cute.

In later rounds you aim at objects juggled by Mr. and Mrs. Stickybear and at a pair of little birds which try to steal the little white balls you need to play with. In another round you try to hit sandbags dropped by Stickybear from his hot air balloon. Hit three and you increase your stock of ammunition by one. If you are hit by a sandbag, your teetertotter board goes SPLAT! and the game is over. The games are all fun and not at all violent.

More than just a word is in order in discussing the artistic qualities of this software and supporting materials. It is an axiom of the entertainment software business that the cover art on a game package far exceeds the realism and artistic quality of the actual game graphics. This is not the case with the Stickybear series.

What you see on the cover is exactly what you get on the inside. The illustrations created by Richard Hefter for his series would look great in a book; they look just as good on the hi-res screen. Hefter obviously understood the limitations and the potential of Apple graphics. The finished product does not make you continually aware that you are watching computer graphics. It is more like watching a children's book come to life.

In a classroom setting, the Stickybear series would be a valuable resource for instruction on the kindergarten and first grade levels. The bright colors, animation, and sound effects are well-suited to attract and hold a child's attention. Youngsters won't have to be chained to the computer to run the Stickybear programs. Once you have grabbed them with the flashy colors and sound, the actual learning will come easily.

Teachers and parents can participate in the action, helping the child to sound out the letters and the words and by counting along with the program.

Xerox/Weekly Reader has made a most auspicious entry into the "edutainment" software field. The Stickybear series of learning programs and the Bop game combine the highest quality programming with sound educational theory. The result is software that makes learning fun for all members of the family. The Stickybear programs will be a valuable addition to the software libraries of schools all around the nation and in the homes of parents who want to turn their Apple computers into powerful teaching tools. □

creative computing
SOFTWARE PROFILE

Name: Stickybear Bop

Type: Arcade game

Systems: 48K Apple or Apple III in emulation mode

Format: Disk

Language: Assembly

Summary: Very entertaining multi-level arcade game for all ages.

Price: $39.95

Manufacturer:
Xerox Education Publications
/Weekly Reader
245 Long Hill Rd.
Middletown, CT 06457

"Bad news dear. I've been replaced by Coleco-Vision."

CIRCLE 109 ON READER SERVICE CARD

creative computing software evaluation

Growing Up Literate

Betsy Staples, Brian Murphy, and David H. Ahl

In the beginning were arithmetic programs. It was natural to look to the computer first for learning involving numbers, so the early educational programs for microcomputers were primarily arithmetic drill and practice.

As the industry has matured, computers have emerged from the arithmetic classroom and invaded every conceivable subject area from social studies to industrial arts.

Here we look at a collection of programs designed to help students in the language arts. Some of them are good examples of ways in which contemporary technology can be used to augment traditional teaching methods. A few serve to reinforce our oft-repeated caveat that just because it *can* be done doesn't mean it *should* be done.

Chambers of Vocab

"The time has come," said Tondor, "to test your powers in the great Chambers of Vocab.

"You have excelled over all the others. Now you must face the final trial."

When I read those opening lines in the documentation booklet of *The Chambers of Vocab*, I was excited. "This should be good," I thought. "Probably a variation on the adventure theme with vocabulary words as the clues to help you out," I thought. "What a great idea!"

Yes, it was a good idea. Unfortunately, it was all mine. The authors of the package had something else in mind.

The Chambers of Vocab is basically a tedious maze game which doesn't even offer you the convenience of a joystick option.

You begin the game by typing in the names of up to four players and selecting one of three difficulty levels. The preliminary screens and instructions are very nicely done. You are presented with a choice of several options of which you choose one by pressing M to move the "choice bar" so that it highlights your selection. When you have positioned the

Chambers of Vocab.

Trickster Coyote.

Introducing Snooper Troops™ detective series. Educational games that turn ordinary homes into Sherlock homes.

Where can you find educational computer games that your kids will really enjoy playing?

Elementary, my dear Watson. From Spinnaker.

Our SNOOPER TROOPS detective games are fun, exciting and challenging. And best of all, they have real educational value. So while your kids are having fun, they're learning.

As a Snooper Trooper your child will have a great time solving the mysteries. But it will take some daring detective work. They'll have to question suspects, talk to mysterious agents, and even search dark houses to uncover clues.

Luckily, the program provides your kids with everything they need: a SnoopMobile, a wrist radio, a SnoopNet computer, a camera for taking Snoopshots and even a notebook for keeping track of information.

SNOOPER TROOPS detective games help your children learn to take notes, draw maps, organize and classify information and they help develop vocabulary and reasoning skills. All while your kids are having a good time.

So if you want to find educational games that are really fun, here's a clue: Ask your local retailer for SNOOPER TROOPS computer games.*

*Available in disks for IBM,® Atari,® Apple,® Commodore 64™

SPINNAKER™

We make learning fun.

© 1983, Spinnaker Software Corp. All rights reserved. Apple, IBM and Atari are registered trademarks of Apple Computer, Inc., International Business Machines Corp. and Atari, Inc., respectively. Commodore is a registered trademark of Commodore Electronics Limited. "SNOOPER TROOPS" computer program is a trademark of Spinnaker Software Corp.

choice bar correctly, you press C for Continue to move to the next screen.

After you have made the preliminary choices, you are asked to wait while the maze is formed. Why this should take so long, I don't know, because the maze is always the same.

Suddenly a maze appears on the screen. In the middle is a small figure (you). Scattered about in the maze are four small colored symbols, and floating around in other areas are four clumps of letters. The letters are the "word beasts" that you must capture.

To capture a word, you must first make your way through the maze to one of the symbols and touch it. This is more difficult than it sounds, because the only way to control your figure is by pressing the N, S, E, and W keys. To get an idea just how frustrating this is, configure your favorite maze to use those controls and see how long you last. Reader's Digest, unfortunately, has not provided the option to reconfigure the controls.

The other thing that makes running this maze tedious is the fact that your figure moves less than half an inch with each keypress, and you must wait until he stops moving before you can press again—even to keep him moving in the same direction. As you tap away on the illogically placed control keys, you begin to wonder if the game will ever end.

As you make your way around the maze, you must be careful not to collide with any of the word beasts. The beasts sort of slither through the maze, turning corners one letter at a time—which is to say very slowly. If you find yourself with a word undulating about between you and where you want to go, you have no choice but to sit and wait for the word to crawl by; there is only one way to get to any given point in the maze. To me it would have made more sense to have permitted the player to take another, perhaps, longer route to his goal instead of just standing in one place wasting time.

When you waste time, you lose points.

creative computing
SOFTWARE PROFILE

Name: The Chambers of Vocab

Type: Educational maze/word game

System: 48K Apple

Format: Disk

Summary: Tedious maze game with little educational value.

Language: Forth-79

Price: $48.95

Manufacturer:
Reader's Digest Services
Microcomputer Software Division
Pleasantville, NY 10570

There is a tally of "power points" at the bottom of the screen. These flicker away as you play, but there is no mention anywhere of their presumed function or of the rate at which they are consumed. Your score at the end of the game is the number of power points you have left after capturing all the beasts.

Which reminds me, we still haven't captured a beast yet have we? Well, after you touch one of the symbols, the screen changes and you see the definition of one of the roving words. You then see a display of all the words remaining uncaptured in the maze, another of those that have been captured, and a third of the score. Several times, I forgot the definition of the word while waiting for the game to cycle through the auxiliary screens.

The Chambers of Vocab *is basically a tedious maze game which doesn't even offer you the convenience of a joystick option.*

When you return to the maze screen, you must tap your way toward the word that has been defined. This is fairly easy, providing no other word blocks your path. If you touch any word other than your object word at any time, you are returned to the center of the maze to begin again.

Each game consists of three mazes each featuring four words. There is only one set of words for each difficulty level, but you can enter your own words and definitions right on the master disk—a very simple and well documented procedure.

The words in the third difficulty level are, indeed, more difficult than those in the first, mostly because they are longer. As such, they take longer to crawl out of your way and cost you more points, so it is more difficult to get a high score.

The Chambers of Vocab is not a great educational game. The game itself is not even entertaining enough to serve as motivation for drill and practice. There are several things that might have made it a better game, including the choice of reasonable control keys or a joystick option, the addition of an extra word in the maze to make the last capture something other than perfunctory, and the use of a more complex maze that would offer more than one path to the goal symbol or word.

As you may have guessed, I was very disappointed by *The Chambers of Vocab*; somehow I expected a great deal more from a company bearing the venerable name of Reader's Digest. —*EBS*

Trickster Coyote

A good tool for teaching vocabulary, at least for review and drill purposes, is the Reader's Digest educational program, *Trickster Coyote*.

No one should be surprised by Reader's Digest having produced a learning game like this. For years one of the most popular features in the magazine has been "It Pays To Build Your Word Power," a little game that has been subtly teaching remedial high school vocabulary to RD's readers for generations. *Trickster Coyote* is basically a colorful, computerized version of the same game.

The key word here is programmability. We can take the slick appearance of the high-resolution color graphics, the music, and the special effects for granted. They are not as important as flexibility in letting the teacher construct his own word lists and definitions to suit the needs of his own classroom. We shall see how this feature works in a moment.

As the program begins you are given the choice of entering words or playing the game. For those who want to try the game out right away, *Coyote* comes equipped with its own word list, divided into three levels of difficulty. Level one is suitable for elementary students. Level three is about right for middle school students.

You select words by the level of difficulty. You also have the option of playing with the words used in the last game or with a selection of eight words that the teacher has saved in advance. Before the game begins, you are given the option of a warm-up. During this phase, you can see the definition for any of the words in the game, a synonym, and an

creative computing
SOFTWARE PROFILE

Name: Trickster Coyote

Type: Vocabulary tutorial

System: 48K Apple II or II Plus, disk drive

Format: Disk

Language: MicroMotion Forth-79

Summary: Colorful vocabulary game a teacher can adapt to specific classroom needs.

Price: $48.95

Manufacturer:
Readers Digest Services
Microcomputer Software Division
Pleasantville, NY 10570

TO HELP EDUCATE YOUR CHILD, WE ASSEMBLED THIS DISTINGUISHED FACULTY.

It's a rare teacher who can make a child think learning's fun.

But we've found several of them. And they make Monkeymath™ more fun than your child ever dreamed an educational game could be.

Monkeymath
by Dennis Zander

Of course Monkeymath helps give your child a better understanding of addition, subtraction, multiplication and division. That's the part *you'll* like.

But the part your *child* will like is Monkeymath's arcade-type action and animation, three skill levels and scoring. So, like any good arcade game, kids just can't stop playing it.

In fact, in a recent issue of Antic magazine, David Plotkin called Monkeymath ". . . one of the most entrancing educational games ever written." (And Monkeynews™ and Monkeybuilder,™ our soon to be released reading comprehension and word recognition games will be every bit as entrancing.)

So Monkeymath does more than help your child understand math—it teaches him that learning can be fun.

And, as you can see, you don't find teachers like that just anywhere.

Monkeymath,™ *Monkeynews,*™ and *Monkeybuilder*™—a new educational series from Artworx.® For the Commodore 64, Atari, Apple and VIC-20 computers. Cassette/Diskette from $23.95. Artworx Software Co., Inc., 150 North Main St., Fairport, N.Y. 14450. For a free catalog of Artworx Software write or call 800-828-6573.

Artworx®

So you can play.

CIRCLE 275 ON READER SERVICE CARD

Word Attack.

Snake-O-Nyms.

example of the word used in a sentence.

Once you are familiar with the words, the game can begin. An animated boy, representing the player, chases a coyote across a bridge of floating logs on the hi-res video screen. At the upper left of the screen is a definition of one of the game words. The idea is to land the boy only on blank logs or on logs where the word correctly matching the definition is written. Landing on a log with a word not corresponding to the definition dumps the boy in the water. To pass those logs by, you must carefully time a stroke of the spacebar to get the boy to leap over the undesired word.

As the game progresses, the coyote changes into a rabbit, a raven, a buffalo, and a bear. Each change lets you know that you are progressing toward victory. If you can successfully evade all the coyote's traps, victory is signaled by an animation of the little boy dancing in triumph atop a totem pole while the coyote slinks away. In an optional "challenge round" the difficulty level increases, and some of the letters of the words are blanked out.

Another game option on the disk is Trickster Tag, a game which involves less eye/hand skill. In this game you get 10 seconds to memorize four words which are projected on the screen, then covered by images of the coyote. The definition of one of the words appears at the top of the screen. The four coyotes flicker, one by one, and it is your job to determine when the flicker is over the correct word. A score line at the bottom of the screen keeps track of right and wrong answers.

The fuel that powers these games is the word list which, as we noted before, can be added to by the teacher or by the student himself. Picking the "edit" option from the main program menu, allows the teacher to enter eight words at a time into the "personal word list." A teacher can use this feature to enter words from the current vocabulary unit or to individualize instruction for students in need of review work. The word list is saved directly to the disk, which is not write-protected.

The program is not really suited for testing for a grade, but it makes a very good reviewing tool, especially since it offers a teacher the ability to check the students' progress. The latest scores for up to four students can be stored on the program disk and can be accessed by student or teacher.

Trickster Coyote is well-designed educational software. Although the word list is adaptable to virtually any level of study, the juvenile theme of the game itself probably limits its application to elementary level students. Chances are that the kids on the middle and high school levels will find the game too cutesy. —*BM*

Word Attack

Word Attack is a vocabulary building program from Davidson & Associates. It is structured logically, leading you from the introduction of the words to be studied to two quizzes and, finally, to an "arcade game," in which you use your new vocabulary to earn points.

At the beginning of the program you choose from levels 1 to 9, which are geared for students in grades 4 through 12. Levels 7, 8, and 9 are said to be appropriate for students preparing for the SAT. Next you select one of three word lists for your level: adjectives, nouns, or verbs.

You can choose to start with any of the four exercises, but it makes most sense to start with Word Display. Word Display displays a word, a synonym, or definition, and a sentence using the word. All displays in the program use upper- and lowercase as appropriate.

Once you have learned the 25 words in your word list, you can move on to Multiple-Choice Quiz which offers a multiple-choice question for each word. The word appears at the top of the screen, and below it are four numbered definitions (all of them from your list). You must choose the number of the correct definition. A counter at the lower right of the screen keeps track of the number of seconds it takes you to complete the quiz.

You can also choose reverse mode, which asks you to match the word to the definition. At the end of the quiz, you see your score and get a chance to repeat the words you missed.

By the time you get to Sentence Completion, you had better have a good command of your words, because this exercise asks you to fill in the blank in a sentence with one of your words. The definition appears at the top, but unless you have really learned your list, it can be difficult

creative computing
SOFTWARE PROFILE

Name: Word Attack

Type: Educational

Author: Janice Davidson and Richard Eckert

System: Apple II, IBM PC

Format: Disk

Summary: An entertaining and educational vocabulary builder

Price: $49.95

Manufacturer:
Davidson & Associates
6069 Groveoak Pl., #12
Rancho Palos Verdes, CA 90274

HIGH TECHNOLOGY REQUIRES HIGH PERFORMANCE ACCESSORIES

In the fast moving, high technology world of microcomputers, the need for high performance accessories often gets overlooked.

Discwasher, recognized as a world leader in audio/video care accessories, understands this need and has developed a line of computer accessories to allow users to get the most from their computer hardware.

The easy-to-use *Discwasher® Disk Drive Cleaner* is both a problem preventer and problem solver. Its dry format safely cleans single or double-sided drives without altering the delicate head alignment or doing possible damage to rubber drive parts with solvents.

The *Discwasher® Computer Cassette Drive CareSet™* is a total maintenance package for your cassette drive system. It includes both the Discwasher® Computer Cassette Drive Head Cleaner and the Computer Cassette Drive Mechanism Cleaner. Together, these two maintenance units can keep the high resolution heads and the critical drive system of your cassette drive system in optimum performance.

The *Discwasher® DiscKeeper™* is a magnetically shielded storage system for floppy disks that takes up no more space than conventional folder packs. DiscKeeper protects against stray magnetic fields which can destroy valuable software. Three DiscKeeper sizes provide loss-free storage and protection for transporting any size disk format.

discwasher

1407 NORTH PROVIDENCE ROAD, P.O. BOX 8021, DEPT. CC, COLUMBIA, MO 65205 USA

A DIVISION OF JENSEN an ESMARK Company

CIRCLE 169 ON READER SERVICE CARD

THE ONE COMPUTER TO HAVE WHEN YOU'RE HAVING MORE THAN ONE.

If you're considering linking up more than one computer, there's only one computer worth considering.

The British Broadcasting Corporation Microcomputer System by Acorn.

One of the BBC Micro's many built-in features is an economical and powerful communications network.

We call this the Econet® local area network.

Econet lets you combine up to 254 BBC's into a single communications system. Virtually no other system lets you hook up this many computers this easily.

What's more, you can link two micros without any special hardware. And all computers on the Econet network can share disc drives and printers.

But what really makes Econet such a great network of computers is the computer it networks. The BBC Micro. The most versatile computer anywhere for its size and price. Its enormous built-in expansion potential means it can handle anything from basic tasks to advanced Econet networking. It also means changing technology won't change it into an obsolete system overnight.

All of which make Acorn the perfect communications system for schools or business.

If you'd like to learn more about how Acorn can build you the perfect communications network, write Acorn Computers Corporation, 400 Unicorn Park Drive, Woburn, Massachusetts, 01801, or call toll-free 1-800-225-8001 (in Massachusetts call 617-935-1190). We'd be happy to communicate with you.

ACORN COMPUTER

© 1983 Acorn Computers Limited

CIRCLE 105 ON READER SERVICE CARD

to recall the proper word. If you get stuck, you can ask for help, which consists of a list of four possible words. Of course, you must also spell the words correctly to get credit for an answer.

The last exercise, Word Attack, is the most fun. In it, you must use the arrow keys to move a little creature wearing a dunce cap back and forth at the bottom of the screen. Four words appear in boxes at the top of the screen, and a definition appears at the bottom. Your job is to position the creature under the correct word and fire his cap at it. There is a timer at the right, and you must shoot before time runs out.

At the beginning of the game, you choose one of three speeds which govern the amount of time you have to shoot. Words shot correctly at faster speeds earn more points.

You can earn extra points by shooting a bonus creature that periodically emerges from the lefthand side of the screen. All vocabulary fire is halted as you try to hit the bonus creature. If you are successful, you earn several hundred bonus points. The only problem is that if you use a rapid fire technique in trying to hit the creature, you can ruin your next vocabulary shot. If you press the fire key after the previous shot hits the creature, that shot will be suspended for a moment while your bonus score is displayed and then reactivated to hit whatever word is overhead. Occasionally, it happens that you hit the correct word by accident—usually you lose credit for the round.

Another bug in the program appeared during one of the quiz exercises. I had answered a few questions and then pressed ESC to exit the quiz. The scoreboard appeared with the report that out of three questions I had answered four correctly for a total score of 133%—quite a neat trick.

For the most part, *Word Attack* is a well constructed educational program. The quizzes and games are interesting enough to keep you motivated, and there is provision for adding your own word lists, complete with definitions and example sentences.

My only quibbles are with some of the word usages and definitions. In the interest of keeping definitions and example sentences short, the authors have sacrificed some of the nuances of meaning that make a rich vocabulary worth having. If, as *Word Attack* maintains, *bier* is just another word for *coffin*, why bother to learn it?

I was also a bit put off by a similar lack of precision in a few of the example sentences. "If a person dies intestate, he has no control over the distribution of his inheritance" is technically correct, but *property* or *estate* in place of *inheriance* would have done a better job of conveying the idea that I think the authors had in mind.

Of course, after you have mastered the 675 words that come with the program, you will want to enter your own words and definitions which can be as precise as you wish. Given this flexibility, I can recommend *Word Attack* for people of all ages who want a systematic and entertaining way to develop their vocabularies. *—EBS*

Snake-O-Nyms

The hero is a frog; the villains are snakes. Sound familiar? No, it isn't Frogger, it's *Snake-O-Nyms* from EduFun, and for some of us it's more fun than Frogger, because the snakes don't win quite as often.

The object of *Snake-O-Nyms* is to find the correct synonym for the word that appears at the bottom of the screen. The possible matches—about 25 of them—scroll horizontally across the screen along with a collection of evil frog-eating snakes. Using the joystick for the Atari (or keyboard for the Apple), you guide your smiling frog face among the slithering meanies and press the trigger (RETURN key) when it is on top of the word you think matches the one below.

If you choose the correct word, your score is increased by 100 points, but you have no time to congratulate yourself. A new word appears at the bottom of the screen almost instantly, and the snakes and synonyms continue to scroll by. If you hit or are hit by a snake, you lose one of the four frogs with which you begin the game.

The alternate version of *Snake-O-Nyms* offers a series of antonyms. High scores for both games are saved to disk with the player's initials.

As the game begins, the snakes and words move very slowly. After your second match (200 points) they speed up to a reasonably challenging rate, and at 1000 points, they begin to move so fast that I found the game almost impossible. The documentation promises an extra frog and additional snakes at 2000 points—I wouldn't know; I never got that far.

Snake-O-Nyms is a satisfying amalgam of intellectual and arcade skills. You must know the meanings of the words to choose the matches, and you must be able to guide the frog safely to the synonym (or antonym). There is enough skill involved to keep your interest even after the words become familiar.

Snake-O-Nyms *is a satisfying amalgam of intellectual and arcade skills.*

Word Flip, the second, totally different game on the disk is a Concentration type game in which you attempt to match words and endings. The game board displays 24 blocks lettered A through X. If you uncover two words or two endings, obviously, you get no points. If, however, you uncover a word and an ending, you must make a decision; you must indicate whether the pair is a match, not a match, or a match that results in a misspelling (teach+ed). In the last case, you must then type the correct spelling (taught). You earn 1 point for recognizing a non-match, 6 for recognizing a match, and 7 for re-spelling the word.

Again, the problem of displaying a misspelled word surfaces, but in this case, the word is on the screen for a very short time. As soon as it is identified as a non-match or misspelling, it disappears.

Unfortunately, there is no provision for adding your own words to either *Snake-O-Nyms* or *Word Flip*, so children will eventually master the material on the disk and move on to other challenges. This is the only significant shortcoming I found with the program.

An interesting feature of this package, which is obviously intended for home use, is the Manager record-keeping system included on the disk. With it, parents can keep track of the number of games played and the children's scores. Each play of the game is recorded with the player's initials, the number of attempts, and the number of correct responses. If nothing else, this feature should provide parents with an idea of how often the game is used.

The 11-page User's Guide begins with clear instructions for loading both Apple and Atari versions and provides brief but

creative computing
SOFTWARE PROFILE

Name: Snake-O-Nyms

Type: Educational game

System: 16K Atari, 48K Apple

Format: Cassette, disk

Summary: Nice combination of intellectual and arcade skills.

Price: $29.95 cassette, $32.95 disk

Manufacturer:
EduFun Division
Milliken Publishing Co.
1100 Research Blvd.
St. Louis, MO 63132

The Eating Machine™
Improve Your Eating Habits.

Let The [illegible] help you attain your full potential for [illegible] than you. It's a simple but factual program [illegible] for diet management and sound nutritional practices. It uses the power of your computer to give you vital information on your actual intake of calories, iron, calcium, vitamins A & C, and sodium and compares your diet to the recommendations of [illegible] authorities.

The Eating Machine™ comes with an expandable data base of 500 common foods that can easily be customized to fit your own eating preferences. You can also analyze recipes and add the results to your data base for future reference.

The Eating Machine™ is used in schools and clinics. Let The Eating Machine™ be your guide to a more healthful future.

For APPLE II & APPLE IIe 48K DISK DRIVE **$49.95**

Look for these other fine Muse products.

MUSE
SOFTWARE
347 N. Charles Street
Baltimore, Maryland 21201
(301) 659-7212

CIRCLE 192 ON READER SERVICE CARD

Word Flip.

Story Machine.

adequate descriptions of both games. An interesting commentary on the state of computer assisted instruction is the section for each game that suggests to parents additional activities to reinforce the skills being exercised by the computer. EduFun suggests making flash cards on 3 x 5 file cards! —*EBS*

Story Machine

Story Machine is an educational game designed to help five- to nine-year-old children learn to write sentences, paragraphs, and simple stories.

Normally, upon loading the disk, you would select Option 1, Write Story. The screen is then divided into two parts, the lower third where you write the story and the upper two-thirds where the characters appear and the story is acted out.

For your story, you must use the *Story Machine* dictionary of 45 words. The 13 nouns and 10 verbs may be used in either singular or plural form. The dictionary is in the instruction booklet, on a laminated card, and can be viewed on the computer by selecting Option 2.

The rules for writing stories are simple. Each sentence must begin with an article, pronoun, or adjective. You must use present tense verbs (run, not ran). A prepositional phrase may not follow a verb. We found that these and the few additional rules were quickly learned by users.

If a sentence is not grammatically correct or if a word is misspelled or not in the dictionary, the computer draws a line through the mistake and erases it for you.

As you enter sentences, the computer animates them for you. For example, if you typed, "The boy runs to the apple," after typing boy, a small boy would appear on the upper part of the screen. Upon typing the period at the end of the sentence, an apple would appear and the boy would run to it.

As you enter sentences, the computer animates them for you.

Say you continued, "He eats the apple. The girl hops to the house." These actions would then be animated on the top of the screen. There are a few sentences that cannot be animated even though they are correct, for example, "The boy jumps the rock," or "To the house the boy jumps." We found that users quickly learned to avoid these constructions and the computer had no trouble animating all their sentences.

creative computing
SOFTWARE PROFILE

Name: Story Machine

Type: Educational Game

Authors: Clark Quinn, Margaret Weinstein, James Schuyler

System: 48K Apple, Atari 800, IBM PC

Format: Disk

Language: Forth

Summary: Write your own animated stories

Price: $34.95

Manufacturer:
Spinnaker Software
215 First St.
Cambridge, MA 02142

The computer also will not animate sentences in which the spatial relationship is inappropriate. For example, if the boy was not next to the apple when we told him to eat it in the first example above, the computer would reply, "Can't do it from here," or "must be closer."

Once users got the hang of the program, the next thing they wanted to find out was what happens when you do every single thing in the dictionary, but especially, what does the verb "zot" do. They also wanted to find out what a "Bumpus" was. We're not giving either one away.

We found that different children responded quite differently to this package. Some wrote sensible stories that could really happen while others created amazingly bizarre events. Stories can be acted out over and over again, saved and retrieved on other disks, and altered by changing sounds or colors. The disk traps for incorrect input and did not bomb out or do anything unexpected.

We feel that *Story Machine* was highly motivational and combined good, solid learning with the fun and excitement of a game. —*DHA*

Spelling Bee

For learners on the kindergarten through third grade levels, Edu-Ware's *Spelling Bee With Reading Primer* could make a valuable contribution to first lessons in language arts, provided that the teacher is willing to devote a little time to learning how to use the program.

For the child, this is virtually a turn-key system. He just turns the computer on and the game boots more or less automatically (the child must press one key to get the game going after the initial boot).

CONTEST!

For the best computer animation sequence created using Movie-Maker™. $1000 prize. Entries should be submitted on disk by December 31, 1983. Winning entry will be shown at 1984 West Coast Computer Faire. For more details, contact Reston Publishing Company.

RESTON CLOSES THE GAP BETWEEN ART AND COMPUTERS

In Reston's new book, **Genesis II, Creation and Recreation with Computers**, by Dale Petersan, artists, writers and musicians use computers to create new visions, new sounds and new ways of expressing themselves, all interwoven with stunning illustrations. With **Movie Maker**, an exciting new program for the Atari® Home Computer by Interactive Picture Systems, you'll learn how to do these things yourself. You'll compose scenery and shapes, then propel them into continuous, flicker-free action. You'll actually make a short animated movie, right at your keyboard. Let Reston release the creative spirit in you.

MovieMaker is a Creative Pastime™ from Reston Software®

A Prentice-Hall Company
11480 Sunset Hills Rd.
Reston, VA 22090
Available at your local bookstore and computer retailer or call us at (800) 336-0338.

Atari is a registered trademark of Atari, Inc.

For the Atari 800 with 48k memory. Coming soon: 16k ROM cartridge.

CIRCLE 232 ON READER SERVICE CARD

Now, the most significant advance in DEC™ software ever!

Announcing DIGITAL REVIEW...the monthly magazine exclusively for your DEC microcomputer.

HARDWARE: Each and every month, you'll get all the latest technological developments—minicomputers...microcomputers...peripherals...telecommunications—and what they mean to you.

PROGRAMMING: All the latest in programming techniques with special features devoted exclusively to traditional and new software applications.

COMPUTER GRAPHICS: Color visual tools for the financial analyst, the laboratory technician, and the physics major. DIGITAL REVIEW reports on the latest innovations and how you can use them in your field.

WORD PROCESSING: You'll learn the newest techniques that will make your office as efficient and as cost-effective as possible.

SOFTWARE: Whether it's the newest in operating systems...or advances in computer networks, DIGITAL REVIEW keeps you up-to-date...and spotlights releases that are changing the way businesses conduct their business.

I/O FEEDBACK: A chance for you—the user—to network your application needs and ideas.

Save up to 36% on

digital review

The magazine devoted exclusively to DEC™ users.

Yes! I want to subscribe to DIGITAL REVIEW:

- ☐ One year (12 issues) only $24.97—17% off!
- ☐ Two years only $43.97—27% off!
- ☐ Three years only $57.97—36% off!

Savings based on full one-year subscription price of $29.97.

CHECK ONE: ☐ Payment enclosed. ☐ Bill me later.

Please charge my credit card:
☐ American Express ☐ MasterCard ☐ Visa

Card No._____ Exp. Date_____

Mr./Mrs./Ms._____ 8H054
(please print full name)

Address_____

City_____

State_____ Zip_____

Add $13 a year in Canada and all other foreign countries. Please allow 30

Save up to 36% on

digital review

The magazine devoted exclusively to DEC™ users.

Yes! I want to subscribe to DIGITAL REVIEW:

- ☐ One year (12 issues) only $24.97—17% off!
- ☐ Two years only $43.97—27% off!
- ☐ Three years only $57.97—36% off!

Savings based on full one-year subscription price of $29.97.

CHECK ONE: ☐ Payment enclosed. ☐ Bill me later.

Please charge my credit card:
☐ American Express ☐ MasterCard ☐ Visa

Card No._____ Exp. Date_____

Mr./Mrs./Ms._____ 8H054
(please print full name)

Address_____

City_____

State_____ Zip_____

Add $13 a year in Canada and all other foreign countries. Please allow 30

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 66 BOULDER, CO

POSTAGE WILL BE PAID BY ADDRESSEE

digital
REVIEW

P.O. Box 2969
Boulder, Colorado 80321

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 66 BOULDER, CO

POSTAGE WILL BE PAID BY ADDRESSEE

digital
REVIEW

P.O. Box 2969
Boulder, Colorado 80321

Save up to 36%!

Now, through this Special Introductory Offer, you can save up to 36% when you subscribe to DIGITAL REVIEW.

digital review
P.O. Box 2989
Boulder, CO 80322

YES! I want to subscribe to Digital Review for:

☐ One year (12 issues) for $24.97—I save 16%!

☐ Two years for $43.97—I save 27%!

☐ Three years for $57.97—I save 36%!

Savings based on full one-year subscription price of $29.97. Add $13 for Canada and all other foreign countries.

CHECK ONE: ☐ Payment enclosed ☐ Bill me
Charge my: ☐ American Express ☐ MasterCard ☐ VISA

Account No. _____ Exp. Date ____

Name _____

8H054

Address _____

City _____ State _____ Zip _____

Please allow 30 to 60 days for delivery of first issue.

Would you like to receive special offers from qualified users of our mailing list? ☐ Yes ☐ No

Spelling Bee.

Watchwords.

The *Spelling Bee* game is very simple. A picture is drawn on the black and white high res screen and the student keys in the appropriate response, such as *pin, door, belt,* or *dog.* For each correct response a smiling face grins and a lively snatch of music is played. A running score is kept at the bottom of the screen.

If the teacher desires, he can preset the program to run the Reading Primer. In this game three picures are shown on the left of the screen. To the right is a word matching only one of the pictures. The child uses the spacebar to toggle between pictures and the RETURN key to make his choice. Wrong guesses and correct answers are tallied on screen.

So much for what the child sees; now for the teacher's role.

The teacher, by hitting the right arrow key as the title page is displayed, can access several utility routines which allow him to shape the lesson. He can see the lesson material in advance and decide what words will be covered in the quizzing. He can look at the performance of the last person to use the program and see which words have been causing the most trouble. This is a very important feature in identifying the areas which need work. The teacher can also command the program to run the *Spelling Bee* tutorial which is a familiarization exercise for the student, rather than a game.

Because the program depends on the pictures which accompany the words, you may not modify the subject matter to enter your own word list. In this respect, the program is more like a text book; you must decide in advance if the words in the word list are the ones you want to teach. Also, since the program requires that you take the time to review the student's performance after each individual session, it takes time to use it to its greatest potential. Without this close attention, the program can be used in a more passive role as a tool for drill, but you sacrifice the ability to monitor progress.

Spelling Bee is a great tool to supplement individual reading and spelling instruction. It would be especially effective in a setting where the teacher is assisted in the classroom by a paraprofessional or in a team teaching setting. Then the teachers can determine which students will use the program and give them the individualized attention needed while the rest of the class concentrates on other activities.

In the final analysis, none of these programs actually automates the learning process. The role of the teacher is still paramount in providing motivation, guiding the lesson, and evaluating the results. What these programs do is what they were meant to do: they provide teachers with tools to help students learn. —*BJM*

creative computing

SOFTWARE PROFILE

Name: Spelling Bee with Reading Primer

Type: Language Arts primer

System: 48K Apple II or II Plus, and disk drive

Format: Disk

Language: Applesoft

Summary: Entertaining games teach basic reading and spelling skills.

Price: $19.95

Manufacturer:
Edu-Ware Services Inc.
P.O. Box 22222
Agoura, CA 91301

Watchwords

I used to be a good speller. Then I became an editor. Now I see so many misspelled words every day that I am forced to look up words to which I would never have given a second glance before. That is why I object to any exercise that uses misspelled words in its format.

That is why I question the pedagogical philosophy behind *Watchwords* by Micromedia Software. The essence of *Watchwords* is the selection by the student of the correct spelling of the word being practiced. Obviously, for there to be a correct spelling to choose, there must be an incorrect spelling to not choose—that is the problem, and that is why I cannot recommend *Watchwords.*

You, however, may disagree with me, assuming perhaps that your child is smarter than I am and will not be adversely affected by constant viewing of misspelled words. For you, I continue this evaluation.

The program itself is basically well constructed. Required responses are consistent—always a number not followed by RETURN; there is ample opportunity to correct your errors before they are entered; and the rules can be changed to suit a student's needs.

The *Watchwords* package includes a program disk, a "wordisk," and an 8 1/2" x 11" typewritten manual. You load the program from the program disk and are then given an opportunity to modify the rules. The most significant options are those that govern the typing of the word. You can choose simply to select the correct spelling and go on, to select the correct spelling and then type the correct word, or to see only the correct spelling and type it.

Other options concern time limits, the number of words that will be presented, and the number of words that must be

DBi Software. A dazzling starstream of wisdom, wonder and wizardry.

Once, not too long ago, all microcomputer software systems were quite alike.

Rigid.

Regimented.

And boringly non-creative.

However, DBi's very unique, very Advanced SystemPac has put an end to all that.

It is, quite precisely, a marvel of software ingenuity and performance.

What it does – and does extremely well – is enable you to smoothly interface your microcomputer with word processing, data processing, and communications networks.

A pleasure to use, our Advanced SystemPac contains a highly sophisticated language that also permits you to write and implement your own data processing operating environment (DPOE) with any computer that operates with CP/M, MS DOS and PC DOS.

But, possibly the best news of all is that our DBi starstream universe of wisdom, wonder and wizardry can be yours for a price that is not out of this world.

So contact your local Victor microcomputer dealer today, or any of the other fine computer centers in the United States and Canada.

And be one of the first to soar into the 21st Century.

DBi Software Products
Turning innovation into information.
102 South Main Street Mt. Pleasant, MI 48858
(517) 772-5055

CIRCLE 145 ON READER SERVICE CARD

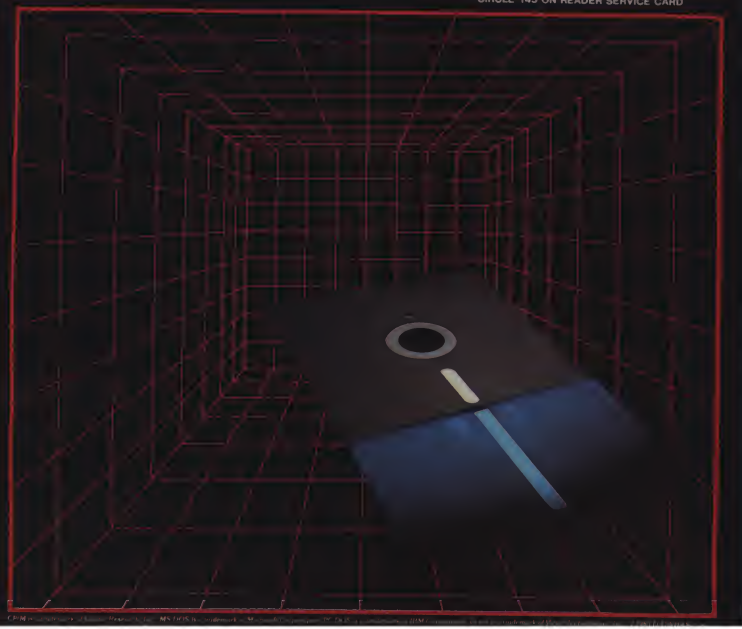

spelled correctly before you advance to the next level.

As you begin to play, you type in your name (if it has fewer than nine letters—poor Christopher), choose your starting level, and specify whether or not you want sound (the sound is so innocuous that it is actually more bothersome to have to keep answering the sound on/off question than to listen to the modest little beeps).

The next screen displays two words in hi-res graphics—all lowercase letters. You press 1 or 0 to indicate which is spelled correctly. If you have selected the type-in option, you must then type the word correctly.

If you make a mistake and select "natein" instead of "nation," the incorrectly spelled word disappears, leaving the correct one on the screen. A few seconds later, both words reappear and you choose again. You are not scolded, or even told that you were wrong; you simply have to choose again. If you are even moderately clever, you should be able to guess correctly the second time. If you don't, however, the sequence repeats itself, and will continue to do so until you get the plagued thing right.

After you have completed ten words (or the number you speeified when setting the options), you get a report on your performance expressed as a percent correct, and you find out whether you can continue to the next level. At the end of level 9 (or sooner if you elect to quit) you may choose to have the results of your session printed out—a feature that will be appreciated by classroom teachers.

When you have mastered the 540 words on the supplied wordisk, you will probably want to add words of your own. To do this, the manual tells you, you need *Wordisk Maker*, a program that, unfortunately, is not included in the *Watchwords* package. Instructions for using *Wordisk Maker* are included in the *Watchworks* manual as is an order form which along with $29.95 will get you the disk. Backup disks can be ordered for $9.95.

I think this is a bit much. For $59.95 you ought to get a complete package. It is quite fair to expect any vocabulary or spelling package to include a means of adding additional words. Discovering halfway through the manual that you must shell out another $29.95 if you want a really useful program is like finding out on your way home from the showroom that the brakes for your new car were an option you neglected to order.

If you are even moderately clever, you should be able to guess correctly the second time.

The manual is thorough and complete. All the information you need to use the program is included along with a set of educational objectives (reinforce recognition of correct spelling and provide familiarity with the keyboard). You do not, however, have to wade through the instructions to play the game in its default mode. Just booting the program disk and following the instructions will have you playing in short order.

Using *Wordisk Maker* is quite easy. The program offers clear instructions which are reinforced by the manual. The bad news is that you must be prepared to enter between 68 and 100 words for each of the nine levels—quite an undertaking.

After you type in the correct spelling of a word, you may choose either to enter your own misspelling or to have the program create one for you. I strongly advise the former, because the program simply transposes a random pair of letters: *residual* becomes *rseidual*, for example—and even I have no trouble choosing between those. —*EBS*

creative computing
SOFTWARE PROFILE

Name: Watchwords
Type: Educational
System: 48K Apple II or IIe
Format: Disk
Summary: Has serious pedagogical and marketing flaws
Price: $59.95
Manufacturer:
MicroMedia Software
276 Oakland St.
Wellesley, MA 02181

Word Division

Another language art package for the elementary grades is *Word Division* by Ahead Designs. This is a program designed to reinforce skills in identifying compound words and recognizing suffixes and prefixes. This, in turn, helps the student in spelling and in usage.

The game the program employs to do the actual teaching is very simple. Using paddle 0 you position a little marker on the high-resolution color display under the word to be divided. By pressing button 0 you "shoot" a line between letters. If you have made the division correctly, your score is recorded, and the next word comes up. There are ten words to a level and four levels to a round.

That is the game in a nutshell. Using a security code, the teacher can modify this game at will. The disk comes with several word lists totaling 1600 entries. The list is divided into four word groups of 400 each.

File A contains words for practice in identifying compounded words such as *classroom* and *schoolbooks*. In file B are more compound words mixed this time with non-compound entries (you move the marker off to one side and then fire for this sort of word).

File C covers suffixes *ed, ing, er, ly, es, y, ment,* and *s* and prefixes *a, al,* and *be*. File D covers prefixes *re, un, mid, mis, de, dis, en, fore, non,* and *sub*. D also drills on the *age, est, en, ful,* and 16 other common suffixes.

The program has many nice features. One is that the teacher's security code keeps the student out of word files where mischief can easily be made.

You can add your own word lists to the disk as needed. You must add 400 words at a sitting, however, so plan carefully and be prepared to spend an hour or so keying in your word list. This feature enables you to use the software to support virtually any text or curriculum materials.

Other features include a "grade book" which allows you to monitor the progress of as many as 30 students. Since the system is virtually tamper-proof, you could use the program to develop grades for students.

Other program routines allow you to set in advance the word list to be used in the quizzing. You can also modify the time limits allowed for responding to each word (you can gradually shorten the limit as skills sharpen) and to backup wordfiles on extra disks.

This is not glossy, glamorous soft-

creative computing
SOFTWARE PROFILE

Name: Word Division
Type: English tutorial
System: 48K Apple II, II Plus, or IIe and disk drive
Format: Disk
Language: Applesoft
Summary: Game effectively promotes recognition of prefixes and suffixes.
Price: $19.95
Manufacturer:
Ahead Designs
699 North Vulcan #88
Encinitas, CA 92024

THE EASY CHOICE

Best Separate Compilation – Best Error Handling – Best Implementation on a Small Computer

Comments From 1983 LA AdaTEC Compiler Faire

". . . JANUS/Ado encompasses at least 5 times as much of Ada as Supersoft, including mony of the more exotic features of the language." Creative Computing

". . . The compiler performed exceptionolly well . . . the linker performs flowlessly . . . the error handling is excellent . . . RR's support is the best I've ever encountered." InfoWorld

"The compiler breoks new ground in the microcomputer field with its excellent runtime error-checking code ond its excellent compiler error messages." Microsystems

"They're (RRS) honest to o fault, so they coll their longuoge JANUS; but its more nearly Ado thon any other microcomputer implementotion I know of . . . I watched some of the demonstrotions ond it works." Jerry Pournelle, Byte

Encouragement of this kind deserves a just reward; we now intend to complete our compiler and submit it for validation.

Our Ada line is available on the following operating systems: CP/M, CP/M-86, MS-DOS, PC-DOS and CCP/M-86

Available from the following distributors:

Westico, Inc.
25 Van Zant, St.
Norwalk, CT 06855
(203) 853-9880

Marfam Corporation
5340 Thornwood Dr. Suite 102
San Jose, CA 95123
(408) 226-0170

Suntex Data
10175 Harwin Suite 100
Houston, TX 77036
(713) 271-9191

Internationally

S-100 Systems
3687-4 Shobumachi
Obayashi
Saitama, Japan 346-01
04808 (5)0416:
04808(5)6565

Micronix
11 Blackmore St.
Windsor 4030
QLD. Australia
(07)57 9152

Nord-Micro Informatique
155, rue du Fauburg St.
Denis
75010 Paris
(1)205-39-47

CP/M, CP/M-86, & CP/M-86 are trademarks of Digital Research, Inc
ADA is a trademark of the U.S. Department of Defense
MS-DOS is a trademark of Microsoft

Copyright 1983 RR Software

RR SOFTWARE, INC.

specialist in state of the art programming

P.O. Box 1512 Madison, Wisconsin 53701

(608) 244-6436

CIRCLE 218 ON READER SERVICE CARD

Word Division.

Cause & Effect.

ware. The graphics are minimal, and there is little of the "arcade excitement" cited by some educational software makers. What recommends this game to teachers will be its versatility, adaptability, and flexibility in supporting lessons in this limited area of language arts.

As for the ability of *Word Division* to hold student interest, that is an open question. To keep interest high, I would organize the class into teams and conduct competitions. —*BJM*

Cause And Effect

Teaching children to read is not easy, but teaching them to comprehend what they are reading is even harder. After all, for comprehension to develop, the child must really *care* about what he is reading. That means the child must be motivated to read.

Two Apple reading comprehension games aptly designed to motivate young learners are *Fact or Opinion* and *Cause and Effect* from Learning Well. They provide motivation through play and competition.

One of the advantages these games offer in a classroom setting is the multiple player feature. The games are designed for play by from two to six students. This means that the teacher can place several children at the computer at a time and cycle the entire class through the computer station more frequently.

Another advantage of these games is that they place the kids in direct competition with each other. Nothing creates so much positive excitement in a classroom. If the teacher is careful to group the children by ability (to avoid one or two brighter children dominating the group) and is willing to put up with the noise of the children as their excitement for the competition grows, he will have little or no difficulty motivating his charges and in getting the maximum value from both games.

The object of *Cause and Effect* is to get to the top of a mountain displayed on the hi-res color screen by following one of several trails winding up the side of the peak. Progress is regulated by a graphics "spinner" which allocates the number of spaces a player can move (1 - 6) during the current turn. Along the way the players wander into campsites, where they find paragraphs to read. After each paragraph a question is displayed for the player to answer, requiring him to identify a cause and effect relationship outlined in the paragraph.

Without preparation, the student might find Cause and Effect *and* Fact or Opinion *a frustrating experience.*

Here is an example: One paragraph describes how a handsome prince discovered the girl he had fallen in love with the night before at the ball. He matched her foot to a glass slipper she had left behind when she rushed home suddenly. Having read the paragraph, the student is then told that the "effect" shown in the paragraph is the prince finding Cinderella.

The child is then given three "causes" to choose from. The correct cause, of course, is that the glass slipper fit Cinderella's foot. Having answered the question correctly, the player is rewarded with an extra space forward on the trail.

From time to time the player lands on a space marked by a climber's pick. When that happens, he receives a cause and effect message such as "Cause: You slept late. Effect: You lose one turn." This is a good elaboration of the theme, and reinforces the thinking skills the players need to identify the cause and effect relationships in the paragraphs.

When one of the climbers makes it to the summit, the game ends with a flourish of music and an on-screen announcement of the winning player's victory. This is a reinforcement that stimulates the kids to play on. The music also signals the teacher to come to the computer station to examine and record the scores and to organize the next program run.

Each child's performance in interpreting the paragraphs and answering the questions correctly is expressed in percentage form, with a flawless performance equaling 100%. A tally is also kept of the number of questions answered correctly and incorrectly. If a printer is part of the system, the teacher can choose to make printed copies of those scores. —*BJM*

creative computing
SOFTWARE PROFILE

Name: Cause and Effect

Type: Educational

System: 48K Apple II, IIe or II+ with disk drive

Format: Disk

Language: Assembly

Documentation: Excellent

Price: $49.95

Summary: Good game to foster analytical thinking in young players

Manufacturer:
Learning Well
200 South Service Rd.,
Roslyn Heights, NY 11577

dilithium Press is cooking again. With more than 32 practical, educational and fun programs specifically for your microcomputer.

Here's what's on the menu.

Annual	*Hamcode*	*Roadrace*
Argo	*Integrate*	*Simeqn*
Arithmetic	*Jot*	*Sortlist*
Biorhythm	*Kaleido*	*Sparkle*
Birthday	*Loan*	*Squares*
Checkbook	*Metric*	*Stats*
Curve	*Mileage*	*Stopwatch*
Decide	*Numbers*	*Tachist*
Decode	*Obstacle*	*Tune*
Diffeqn	*Pi*	*Vocab*
Flashcard	*Powers*	*Walloons*
Graph	*Pythag*	*Wan*
Groan	*Quest/Exam*	

Written in easy-to-understand language, each book contains complete program listings plus suggested projects. For only $19.95, we serve up everything from math, to business, to games with color graphics. Plus, you'll receive generous portions of screen display examples to help guide you through each program.

And we have a blue plate special! Save your fingers from typing in the program by buying the diskette or cassette for only $15 more ($34.95 for the book/software package.) Fully-tested and machine-specific, our software is backed with a **forever** replacement guarantee. For questions or problems, call our toll-free customer service number.

You'll find dilithium Software at your nearest bookstore or computer store. Use our toll-free number for their locations or ask for the latest copy of our catalog, "Smorgasbord", absolutely free.

If your microcomputer is starving for new projects, call today for the smorgasbord from dilithium Software.

dilithium Software
P.O. Box E
Beaverton, Oregon 97075
800-547-1842 or
646-2713 inside Oregon

CIRCLE 149 ON READER SERVICE CARD

The Commodore 64, VIC 20 and IBM P.C. software smorgasbord.

More Than 32 Basic Programs For The
Commodore 64
COMPUTER
Tom Rugg, Phil Feldman and Clarence S. Wilson
More than 32 Basic Programs for the
VIC-20
COMPUTER
More than 32 BASIC Programs for the
IBM Personal Computer

The Chaplin character licensed by Bubbles, Inc., S.A.

Draw attention to yourself.

(Write a program for the IBM Personal Computer.)

Let your imagination take wing.

Think charts. Graphs. Shapes. Images.

Use originality, creativity and color in programs that entertain. Educate. Organize. Analyze. And programs that get down to business.

Maybe you've written software like that. Or perhaps you're thinking about it.

If so, consider this.

You could draw attention to yourself by writing programs *for* the IBM Personal Computer *on* the IBM Personal Computer. Because all our advanced features (see the box at right) make it faster and easier to do so.

Enhanced BASIC already in ROM, for example, has graphics commands already built in.

And if you write a program using our Advanced BASIC, you'll find the DRAW command particularly appealing. It's virtually a separate graphics language *within* a larger language.

Put your visual together with both the characters and symbols in ROM for a simultaneous, text-and-graphics mix.

Have musical accompaniment as well.

It's easy, because BASIC controls the built-in speaker with a single command.

Utilize the ten, programmable function keys. Try F3 to paint. F4 for lines. F5 for circles. Or F6 for boxes.

IBM PERSONAL COMPUTER SPECIFICATIONS

User Memory
64K-640K bytes
Microprocessor
16-bit, 8088
Auxiliary Memory
2 optional internal diskette drives, 5¼" 160KB/180KB or 320KB/360KB per diskette
Keyboard
83 keys, 6 ft. cord attaches to system unit
10 function keys
10-key numeric pad
Diagnostics
Power-on self testing
Parity checking

Display Screens
Color or monochrome
High-resolution
80 characters x 25 lines
Upper and lower case
Operating Systems
DOS, UCSD p-System, CP/M-86†
Languages
BASIC, Pascal, FORTRAN, MACRO Assembler, COBOL
Printer
All-points-addressable graphics capability
Bidirectional
80 characters/second
18 character styles
9 x 9 character matrix

Permanent Memory
(ROM) 40K bytes
Color/Graphics
Text mode
16 colors
256 characters and symbols in ROM
Graphics mode
4-color resolution: 320h x 200v
Black & white resolution: 640h x 200v
Simultaneous graphics & text capability
Communications
RS-232-C interface
SDLC, Asynchronous, Bisynchronous protocols
Up to 9600 bits per second

Remember that these function keys make your program more "friendly" to the user and, therefore, more appealing to us.

In fact, if you're interested in licensing your software, we could be interested in publishing it.

We could also be interested even if it runs on *another* computer. If we select your software, we'll ask you to adapt it to our system.

So if you think your software is close to picture perfect, consider sending it in.

For information on how to submit your completed program, write: IBM Personal Computer, External Submissions, Dept. 765 PC, Armonk, New York 10504.

IBM®

CIRCLE 174 ON READER SERVICE CARD

The IBM Personal Computer
A tool for modern times

For more information on where to buy the IBM Personal Computer, call 800-447-4700. In Alaska or Hawaii, 800-447-0890.

†UCSD p-System is a trademark of the Regents of the University of California. CP/M-86 is a trademark of Digital Research, Inc.



Fact or Opinion.



Wordy.

Fact Or Opinion

A delightfully contemporary setting—a shopping mall—is the arena of competition in *Fact or Opinion*, a reading comprehension game which helps develop the useful skill of making distinctions between factual statements and "puffery" in advertisements and which prepares the student to examine what he reads with a critical eye.

In this game the object is to collect five presents at the hi-res mall and to exit ahead of the other players. The number of squares the player travels around the Monopoly-style playfield is determined by throw of a video die, on which the spots disappear as the player uses up his move.

If he lands at the entrance to a store, the player has an opportunity to win a present by reading a paragraph of advertising and then identifying which parts of it are statements of fact and which are statements of opinion. On some squares, instead of being given a paragraph to analyze, he is shown three sentences and asked to choose the one which is either fact or opinion.

A few of the paragraphs, being simple listings of merchandise for sale and prices, should be easy to interpret as fact. Other paragraphs are constructed more subtly and require more thought. Some of the paragraphs, for example, consist largely of questions which the student must learn to disregard, since they are neither fact nor opinion.

Some of the paragraphs are sheer opinion, but stated in a very assertive and positive manner. It will be hard for some students, at first, to identify opinion that is stated so aggressively. "You can have a really great date whenever you want one. We can match you with the right person. You need not be lonely ever again." This is opinion, of course, but many grownups might be unable to tell the difference. With enough practice playing this game a child should be able to spot the criteria which separate opinion from fact. The skills learned will enable the student to make critical judgments in his other readings.

The game ends when one of the students succeeds in making an exit from the shopping mall. Again, music signals the teacher to come to the computer station to check the scores. The tallies are kept in the same manner as *Cause and Effect*, with the same printout capability.

It is obvious that before these games can be used effectively there must be a program of supportive classroom instruction. Without the right preparation and advance skill-building, the student might find *Cause and Effect* and *Fact or Opinion* a frustrating experience. On the other hand, if the teacher plans carefully, the games can find a place at the center of a complete unit combining reading comprehension with an introduction to critical thinking.

One of the few weaknesses of these two programs is that they are not modifiable. Were the teacher to have the ability to supply the paragraphs used in the questions from texts or other classroom materials, the games could be linked more closely with the established language arts curriculum. It would also enable the teacher to grade the difficulty of the paragraphs and questions to match the exact needs and skill levels of the students.

The games are available in two versions. The Red Level versions are for students with reading abilities typical to Grades 2 to 3.5. The Blue Level games are geared for Grades 3.5 to 5. Used thoughtfully and with the careful preparation, *Cause and Effect* and *Fact or Opinion* can earn a useful place in any elementary reading program.—*BJM*

creative computing
SOFTWARE PROFILE

Name: Fact or Opinion

Type: Educational

System: 48K Apple II, IIe or II+ with disk drive

Language: Disk assembly

Documentation: Excellent

Price: $49.95

Summary: Great learning game; teaches critical thinking.

Manufacturer:
Learning Well
200 South Service Rd.,
Roslyn Heights, NY 11577

Wordy

Wordy from ComPress is a program I would like to be able to require all prospective contributors to *Creative Computing* to use. *Wordy* attempts to teach style by attacking some of the most common stylistic mistakes that writers make—mistakes that have made their writing wordy.

The eight ills that the program treats are circumlocutions, redundancy, *it is* constructions, weakening intensifiers, unnecessary *is* and *are* forms, vague expressions, pretentious diction, and elaborate constructions.

On each of the three *Wordy* disks is a general introduction to wordiness and a menu that lists all the lessons in the package. If you choose a lesson that is not on the disk currently in your drive, *Wordy* tells you which disk to insert.

Each lesson begins with a description of the kind of wordiness under consideration and several examples. Then follows

I have the slippers. Could you get the paper?

The perfect addition to any family, the RB5X Intelligent Robot™ is a versatile, multi-purpose, programmable home appliance.

RB5X comes completely assembled, with software that allows it to learn its environment; sonar and tactile sensors that detect obstacles in the robot's path; a routine that helps RB5X find its charger when its batteries are low; and an array of options that turns RB5X into a real workhorse.

With the vacuum attachment, you can program RB5X to vacuum the living room each morning after you leave. Add an arm, and RB5X becomes a messenger, able to lift and carry up to 12 ounces. Add the fire detector/extinguisher, and RB5X senses small fires, finds them, and puts them out. RB5X with voice capability can respond to your spoken word with actions or words of its own.

We also offer a Robot Control Language (RCL) with Savvy™ that makes programming RB5X easier than training the family dog. A unique combination of hardware and software, the Savvy system speeds up software development by letting you program your RB5X with common English words and phrases. Available now for the Apple II and Apple IIe, RCL™ will soon be mounted on board the robot, making it compatible with most other brands of computers.

Imagine all the wonderful things a robot in your home could do for you. Then see RB5X for yourself. You'll never be the same again.

Ask your local computer retailer for a demonstration. Or contact us for the name of the RB5X dealer nearest you.

RB ROBOT CORPORATION

18301 West 10th Avenue, Suite 310, Golden Colorado 80401, USA (303) 279-5525

CIRCLE 214 ON READER SERVICE CARD

a cute graphic which shows a young writer reconsidering his choice of words—he has a very astute "inner voice" that reminds him that conciseness is next to godliness. All of the example and exercise sentences are complex and interesting; most of them treat social studies topics.

The exercises take several forms. The simplest is a choice between two sentences in which you choose the less wordy of the two. The second form offers a sentence, each word of which has a number suspended over it. You type in the numbers of the words which begin and end the wordy phrase. This technique is somewhat less satisfactory than the first, because it is sometimes difficult to know just how much of the phrase the author wanted to include in the correct answer, and there doesn't seem to be any flexibility in the correct response; you either choose exactly the words the author chose or you don't get credit for the exercise. You do get a second chance to type the correct numbers, but by then your score is shot.

The least satisfactory of the three formats requires you to retype a wordy sentence, wording it so as to avoid the pitfall being studied. Although this makes the most sense from the standpoint of learning the material, it is very frustrating for the student. As in the second format, there is no flexibility in the response; you must type exactly what the author wants—there is only one correct answer.

Unfortunately, neither editing nor writing is an exact science, and it is quite possible to find more than one acceptable way to reword a sentence. It is even more possible to make a typing error (such as forgetting the period at the end of the sentence) that will strip you of all credit for the exercise. If your first answer is wrong, you must retype the entire sentence (some of them are quite long). I feel strongly that the author should have allowed for, at least, a typing error or two when specifying the answer.

creative computing
SOFTWARE PROFILE

Name: Wordy
Type: Educational
Author: Priscilla Sears
System: 48K Apple
Format: Disk
Summary: A very good introduction to wordiness.
Price: $100 for 3 disks
Manufacturer:
ComPress
P.O. Box 102
Wentworth, NH 03282

My only other criticism of the program is that there are not enough exercises. In addition to the explanation and examples, each lesson offers only five or six exercises—not quite enough to fix the concept firmly in your mind. A minimum of ten exercises per lesson would be better.

At the end of each series of exercises, the program repeats the exercises you did incorrectly, and then presents your score as a percentage on a horizontal bar. As you can guess, with so few exercises all of which demand perfect answers, it is very difficult to get a good score.

The high price of *Wordy* probably makes it most appropriate for use in schools and libraries where students can work on the short lessons as time permits. The disks are copy-protected, and back ups are available for $10.00 each.

All in all, ComPress is on the right track. The concept behind *Wordy* is excellent and just a little more programming sophistication would make the entire program an outstanding contribution to the body of educational software. —*EBS* □

Excellence Acknowledged.

Some people demand the best.

Superior quality at superior value identifies the "best" products, and the best in Apple II®-compatible drives is the Micro-Sci line of 5¼" floppy disk drives and subsystems.

Business people needing storage, reliability and fast access have been impressed with Micro-Sci's A40 system since we introduced it back in 1979. For a lower list price than the Apple Disk II®'s, the A40 offers 20Kb more capacity, faster access time and greater data reliability.

The Micro-Sci A70 drive combines quick access and high reliability with a full 286Kb storage capability.

The newest member of Micro-Sci's Apple II-compatible family, the A2, is a direct replacement for the Disk II, featuring total compatibility at a lower cost. Better still, you can mix our A2 drive and controller with their drive and controller for complete freedom of interchangeability.

And Micro-Sci's controller includes operating features like jumper-selectable 3.2 and 3.3 DOS.

Give yourself the privilege.

Micro-Sci delivers the most in quality, reliability and performance. So when you consider additional drives or a disk subsystem for your Apple II, indulge yourself in the Micro-Sci alternative.

See our complete product line today at a dealer near you.

(SPECIAL NOTE TO APPLE III® USERS: Micro-Sci also offers a full range of Apple III-compatible drives. Ask your local dealer for details.)

μ-SCI
MICRO-SCI

Micro-Sci is a Division of Standun Controls, Inc
2158 SOUTH HATHAWAY STREET • SANTA ANA, CALIFORNIA 92705 • 714/662-2801 • TELEX 910-346-6739
International Dealer Inquiries: IMC International Markets Corp Telephone 714/730-0963 • Telex 277182-ROBY UR

® Apple, Apple II, Apple III and Disk II are registered trademarks of Apple Computer, Inc

CIRCLE 273 ON READER SERVICE CARD

ATTENTION HUMANS!

MAGIC HAS LANDED

– the computer for the serious of mind.

Like television and stereo, computers can be used by many different people, in offices and business, in schools and at home ... the interest in programs is the difference.

Excessive consumption of mass quantities is EASY with Z80A and 6502 processors and up to FOUR 400KB DISK DRIVES.

Here are a few of the ways (or software programs) in which you can put Magic in your life.

Extensive selection of software abound everywhere at economy levels.

Planning and Scheduling • Church and Association Management • Mortgage and Interest Details •

LOVE is a ready-to-use computer system.

Games for Executives • Menu and Recipe Files • Retail and Store Management • Mail List Operations • Activity and Hobby Organizing • Learning FORTRAN • Order and Sales Entry • Christmas Presents List • College

MAGIC speaks many languages including CBASIC which comes with system, plus a dictionary, a word processor, an electronic spreadsheet and a filing system — FREE.

BASIC Programming and Learning • Electronic Spreadsheet • Administrative Reports • Address File, Control and Up-Dating • Dictionary and Spelling • Your Own Private Secretary • Designing Forms • Information for Insurance and Hospitalization • Learning Computers • Managing Home Purchases and Inventory • Structural Engineering • Medical Office Scheduling

ATTENTION HUMANS!
Our mission here on earth is rapid conversion of excessive data into functional modes of information... this may be accomplished with Itty Bitty Machine ... but more productively with MAGIC.

Professional Appointment Book • Income Tax Preparation • Accounts Receivable Accounts Payable and Aging • School Administration • Property and Asset Management • Engineering Circuitry • Sports and Activity Statistics • Medical and Legal Accounting • Wordprocessing and Letters • Travel

64K RAM, dual processor system, video, communications and printer interfaces.

Thesis and Reports • Data Communications • Business Marketing • File and Retrieval Systems • Dental Office Management • Librarying and Cataloging • Indexing for Small Business • Household Inventory • Investment Analysis and Tracking •

Magic computer

WRITE TO: Magic Computer Company, Inc. • Two Executive Drive • Fort Lee, NJ 07024
(201) 944-6700 • *CALL:* (800) 221-1565 • Telex: 144594

CIRCLE 181 ON READER SERVICE CARD

Announcing

SuperSprite™

Plug arcade excitement into your Apple computer

Super Sprite is an amazing peripheral card that plugs easily into the Apple's expansion slot. It magically transforms your Apple into an exciting entertainment center for colorful and dramatic animation, realistic sound effects and actual speech.

Sprites Galore

Only Super Sprite has multi-plane graphics for life-like 3-D animation. Watch your screen come alive with animated characters (sprites) that flit and fly, intersect and interact, and never get in the way of each other. **And sprite action can join standard Apple graphics on the screen at the same time.**

Software Support

Every Super Sprite package includes the Amperspirite™ software language that lets you devise sprites in seconds from the keyboard. Plus sound effects and speech! Or, simpler yet, you can buy a commercial game that's already written around the Super Sprite.

Your computer store should have Super Sprite in stock. If not, ask him to order one for you. Suggested retail is only $395.

Super Sprite package includes operator's manual, Amperspirite programming utility and demo diskettes.

Synetix Inc.

15050 N.E. 95th, Redmond, WA 98052, (206) 881-7110 **1-800-426-7412**

* Amperspirite is a registered trademark of Avant-Garde Creations, Inc ™ Super Sprite is a registered trademark of Synetix Systems, Inc 1983 ©Copyright Synetix Systems Inc 1983
®Apple is a registered trademark of APPLE COMPUTER, INC.

CIRCLE 261 ON READER SERVICE CARD

ANNOUNCING A REVOLUTION IN APPLE GRAPHICS AND SOUND

THE MAGIC BEHIND THE MIRACLE

There is no question that the new SUPERSPRITE BOARD from Synetix is something of a miracle.

Suddenly, the Apple's graphics capabilities have been pulled from mediocrity and launched into the forefront of today's state-of-the-art graphics explosion. SPRITE GRAPHICS, 16 HI-RES COLORS, 35 VIDEO PLANES, APPLE & SPRITE GRAPHICS TOGETHER, EXTENDED SOUND EFFECTS, VOICE AND MUCH MORE NEVER POSSIBLE ON THE APPLE BEFORE NOW.

Equally amazing are the three special software packages created especially for this board by Don Fudge, aptly titled THE STARSPRITE SYSTEM. The board, without STARSPRITE, would be much like the Apple without any programming language -- STARSPRITE is the key.

By the end of the first sitting with the STARSPRITE SYSTEM, you'll not only be able to perform functions once reserved only for seasoned programmers, you'll also be able to create graphics and animation that, until now, weren't even thought possible on the Apple.

STARSPRITE I is included at no extra charge with the SuperSprite board. This software and extensive manual teaches you how to take command of the board's graphics, sound, music and voice capabilities and includes three exciting, alterable arcade games.

STARSPRITE II is designed for intermediate programming and contains utilities and tutorials for animation, sound effects, music scene creation and much more.

STARSPRITE III is a professional programmer's dream-come-true, providing the entire system's source codes, machine language routines, pokes, buffers, collision paths, Ampersprite™ information, etc

The STARSPRITE SYSTEM is unlike anything yet created for the Apple. For more information dial (503) 345-5202 for a special two-minute recording. Our order number is (503) 345 3043. Call us now to experience the future

SPRITEWARE™ FROM AVANT-GARDE

(503) 345-3043 P.O. Box 30160 EUGENE OREGON 97403

CIRCLE 115 ON READER SERVICE CARD

TAKE A BREAK!

For Apple, Atari, Commodore 64, and IBM-PC

WITH NIGHT MISSION PINBALL

You deserve the best. You've earned it. Now reward yourself with a session of Night Mission PINBALL, the most realistic and challenging arcade simulation ever conceived! ■ Stunning graphics and dazzling sound effects put Night Mission PINBALL in a class by itself. Game features: multi-ball and multi-player capabilities, ten different professionally designed levels of play, and an editor that lets you create *your own* custom modes. ■ So take a break with Night Mission PINBALL from SubLOGIC. Winner of *Electronic Games* magazine's 1983 Arcade Award for Best Computer Audio/Visual Effects.

See your dealer . . .

or write or call for more information. For direct orders please add $1.50 for shipping and specify UPS or first class mail delivery. Illinois residents add 5% sales tax. American Express, Diner's Club, MasterCard, and Visa accepted.

Order Line: 800/637-4983

CIRCLE 257 ON READER SERVICE CARD

subLOGIC Corporation
713 Edgebrook Drive
Champaign IL 61820
(217) 359-8482 Telex: 206995

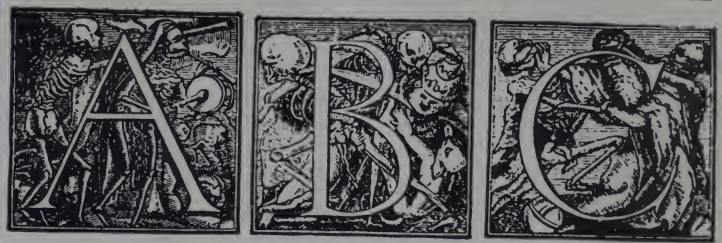

adventures in education

Graham Unwin

Role playing with a computer is but one way computers can be used as educational tools in the home and classroom. Adventures and simulations allow the student to assume a new identity and experiment with different kinds of behavior and unusual situations.

These adventures can be historical simulations, present day mysteries, science fiction projections into the future, or completely fanciful excursions into settings of indeterminate chronology. All require thinking, planning, strategy, and patience if the player is to succeed.

As a teacher who is constantly looking for educational value in the activities my students enjoy, I find that adventures and simulations offer positive learning experiences. As a young person plays an adventure game, he develops such important skills as spelling, reading comprehension, critical thinking, and creativity. He must analyze a situation and act in a manner consistent with the rules that he has learned govern his environment. Often, his understanding of historic and scientific events is broadened as he copes with unfamiliar situations.

Each game has certain objectives which may or may not be apparent as play begins. The writers of adventures are extremely clever at devising schemes and patterns which can be uncovered only through perseverance and systematic experimentation. Young people derive a great deal of satisfaction from attacking a task and sticking with it until the problem is solved.

They also enjoy participating in an ongoing story in which they are the characters who determine what happens next. The experience is completely different from the passivity of TV viewing or the physical involvement of arcade game play.

From an educational standpoint, participating in a good adventure serves as an effective introduction to the computer as a complex information processing tool that is easy and fun to use. The experience helps the student learn how to organize information as it demonstrates the abilities and limitations of the machine. Many students are inspired to learn more about the computer and eventually become accomplished programmers.

Students also appreciate the exploratory nature of adventures which creates a sense of suspense and anticipation. A cause one false move can bring about the demise of one's character in a moment, each move involves risk and must be made after carefully considering all the

Graham Unwin, 150-15 79th Ave., Flushing, NY 11367.

possible consequences.

As every computer enthusiast knows, there are many adventure packages on the market today. They are available for virtually every computer from the tiny Timex Sinclair 1000 to the mighty, all purpose CP/M system. They are also among the more expensive game packages available, so care must be taken in choosing the ones that will work best in the educational environment.

When I began using adventures in the classroom, I found that different programs were appropriate for different situations. A program that did not work well in the classroom might be quite effective as a teaching tool at home.

In my classroom, I scheduled computer adventure sessions during recesses, before school, and after school. After more than a year of experimentation, my team of 10- to 13-year-old experts has come to some important conclusions about many of the packages currently on the market. The remainder of this article is a discussion of their opinions and conclusions.

Wizardry

Wizardry, one of the most popular fantasy role-playing games around, allows several characters to travel together through an underground maze full of mystery and danger. Travel is guided by a three-dimensional representation of the maze, and the actions of the characters are influenced by a multitude of variables, only some of which are under their control. The unique mix of text and graphics and the character development offered in *Wizardry* capture and hold the interest of most students.

The game requires a great deal of strategic planning. Schemes must be conceptualized and tried. If they work, the rewards are immediate: the character is improved, a treasure is uncovered, or a needed item is found.

The other unique and appealing feature of *Wizardry* is its multiplayer format. It is the only game we have tried that allows several players to become involved in the game, each with his own character. Players must cooperate in sharing record keeping responsibilities as well as ideas and strategies. *Wizardry* encourages social interaction, cooperative behavior, and active dialogue. It is difficult but not impossible; continual progress spurs the player on.

Hi-Res Adventures

Another series of adventures popular with my students are the Hi-Res Adventures from Sierra On-Line. The series includes five regular adventures and one super epic called *Time Zone*.

It is best to start with one of the earlier games such as *Mission Asteroid* or *Mystery House* and work up to the more complex *Cranston Manor, The Wizard and the Princess, Ulysses and the Golden Fleece*, and *Time Zone*.

In *The Wizard and The Princess*, the goal is to save the life of a princess in a castle far away. This is not an easy task, and the problems encountered along the way call for some serious, flexible thinking. The game is good for a group, because the more people there are, the better are their chances of hitting on the correct solution.

Sierra On-Line also offers *Dark Crystal*, a hi-res adventure based on the movie of the same name.

A factor that must be considered with these and other adventures is the amount of frustration they induce. Beginning adventurers frequently reach an impasse and can spend hours trying to overcome a



single obstacle. The most effective way to deal with this problem in the classroom is to have a more experienced adventurer available to provide hints when the action bogs down.

Adventure International

Scott Adams of Adventure International has written more than a dozen text adventures, most of which have recently been converted to include graphics. *Adventureland, Pirate Adventure, Mission Impossible*, and *Strange Odyssey* are the favorites in my classroom. All are now available in graphic form for most computers.

Scott Adams adventures are known for the tricks and puzzles which players must solve to progress. These can keep groups of students busy for hours.

Adventures for Beginners

Phoenix Software, recognizing that it often takes a player a while to learn the techniques of successful adventuring, offers a tutorial adventure called *Birth of the Phoenix*. My students found this approach very helpful, and enjoyed playing the game, too.

Other high quality adventures from Phoenix Software include *Adventure in Time, Queen of Phobos*, and *Sherwood Forest*, an animated adventure that puts the player in the role of Robin Hood.

The Snooper Trooper games from Spinnaker Software are also good adventures for beginners. Written specifically for young people, *Granite Point Ghost* and *Disappearing Dolphin* are intended to be educational. The student plays detective and must try to solve a crime; suspects can be interviewed and clues uncovered. Snooper Troopers have provided many hours of challenging fun in my classroom.

Infocom

The adventures from Infocom are in a class by themselves. *Zork I, II*, and *III, Starcross*, and *Suspended* feature fantasy/science fiction scenarios that require a great deal of experience and determination. *Deadline* and the new *Witness* cast the player in the role of a detective whose task is to solve a crime before time runs out. They are very realistic and include complex vocabularies.

In terms of innovative designs and verbal interaction, Infocom is the leader in the field.

Ultrasoft

Mask of the Sun by Ultrasoft is another very challenging adventure. It requires the player to explore Aztec ruins for artifacts that are the key to his survival. The game is difficult, but the writers have taken care to provide enough information at each location to avoid total frustration.

Mask of the Sun, like the Infocom programs, is noted for the flexibility built into its vocabulary. With these games, adventurers can spend more time exploring ideas and less time searching for word combinations the program will accept.

Sword Thrust

Some of the students were particularly partial to *Sword Thrust*, a sophisticated version of an older text adventure called Eamon. *Sword Thrust* allows the player to create a character which he then stores on disk and uses in different scenarios. As the character progresses through a scenario, he gains experience and skill which he can use in future games.

Titles in the *Sword Thrust* series include *Vampyre Caves, Case of the Sultan's Pearl*, and *The Green Plague*.

Sirius Software

Sirius has released an adventure which my students found very difficult, but attractive, nevertheless, because of its ani-

NEW UP TO 2MB ON A SINGLE CARD!

STATE OF THE ART MEMORY SYSTEMS

512KB SINGLE BOARD IBM MEMORY W/RS232-C PORT

- Addressable as a contiguous block in 64KB increments thru 1 megabyte.
- On board parity with interrupt on parity error.

SINGLE QTY. PRICE: $595.00

MEMDISK 1 Allows memory to emulate disks. Increases system performance!! FREE with purchase of memory.

64KB SINGLE BOARD EXORCISER I, II, AND ROCKWELL SYSTEMS 65 MEMORY

- Parity checker on board.
- Addressable as a contiguous block in 4K increments with respect to VXA or VUA.
- Pin to Pin compatibility.

SINGLE QTY. PRICE: $250.00

NEW

512KB TO 2MB SINGLE BOARD MULTIBUS MEMORY

- Pin to Pin MULTIBUS compatibility for both 8 bit and 16 bit systems.
- On board parity with selectable interrupt on parity ERROR.
- Addressable up to 16 megabytes.

SINGLE QTY. PRICE:

512KB	**$ 895.00**
1MB	**$4495.00**
2MB	**$8700.00**

64KB SINGLE BOARD S100 MEMORY

- Addressable as a contiguous block in 4K word increments.
- Battery back-up capability.
- Functions with on-board refresh.

SINGLE QTY. PRICE: $250.00

NEW

256KB TO 1 MB SINGLE BOARD LSI 11 MEMORY

- On board parity generator checker.
- Addressable as contiguous block in 256KB increments through 4 megabytes.
- Battery back-up mode.

SINGLE QTY. PRICE:

256KB	**$ 595.00**
512KB	**$2650.00**
1MB	**$3995.00**

DON'T ASK WHY WE CHARGE SO LITTLE, ASK WHY THEY CHARGE SO MUCH.

Chrislin Industries, Inc.

31352 Via Colinas • Westlake Village, CA 91362 • 213-991-2254

TWX 910-494-1253 (CHRISLIN WKVG)

CIRCLE 136 ON READER SERVICE CARD

mation and style of play. Although the story line is a bit weak, *Escape from Rungistan* features some very novel problem solutions.

Copts and Robbers from Sirius is a good graphics-only adventure for the very young.

Keyboard Control

Another type of adventure requires that the movement of the character be controlled from the keyboard. These are challenging and require a somewhat different approach than the games that move the character about in response to verbal commands.

Their common drawback in the classroom is that they don't lend themselves to group play. Aside from this, they are very involving games. Examples include *Ultima, Odyssey, Adventure to Atlantis*, and *Temple of Apshai*.

The Search Series

In a category by itself is a set of simulations from McGraw-Hill called the Search Series. These are designed for use in the elementary and middle school classroom.

After having used *Geography Search* and *Community Search*, I have nothing but the highest regard for the quality of learning they encourage and their unique and innovative design.

Community Search, for example, is a simulation of man's early civilization building and confronts students with the kinds of decisions these people had to make. The class is divided into four groups of nations and told that they have been successful up to this point but are about to face a severe drought. Students progress by trial and error to knowledge of the best way to survive. *Geography Search* simulates the days of the early explorers at sea.

Scientific Simulations

The last group of games I will consider includes simulations that are based on actual scientific phenomena. Although I have seen quite a few of these, several are truly outstanding.

The first is *Rendezvous* from EduWare. In this simulation of the US Space Shuttle, the player flies the shuttle into space, establishes orbit, and then docks with a

Adventures In Education: A Comparison Chart

Program	TRS-80	Atari	Apple	IBM	Fantasy/Adventure Qualities	Historical/Scientific Qualities	Works for one person	Works for a group of people	Has character development	All text	
Adventureland		✓	✓		✓		✓	✓			
Pirate Adventure		✓	✓		✓		✓	✓			
Curse of Crowley Manor		✓	✓				✓	✓			
Interactive Fiction (discontinued)					✓		✓			✓	
Labyrinth of Crete			✓		✓		✓	✓			
Temple of Apshai	✓	✓	✓	✓	✓		✓		✓		
Dragon's Eye		✓	✓		✓		✓				
Hellfire Warrior	✓	✓	✓		✓		✓		✓		
Empire of the Overmind	✓	✓	✓		✓		✓	✓		✓	

space station. Accomplishing the docking maneuver is difficult, but the player gets a good sense of what it must be like to pilot a space craft.

Another simulation by the same author is a trip to Saturn called *Saturn Navigator* from Sublogic.

Microbe from Synergistic Software is a scientific adventure that takes place inside the human body. The player pilots a miniature submarine through the body to correct a patient's medical problem. To complete the mission, the player must make use of several resources, including a library, a navigator, a technician, and a physician.

The designers of the program have carefully provided the ability to control the difficulty of the mission, so that the game can be equally challenging for a 12-year-old or a medical student. The documentation is good and offers an exciting introduction to the field of medicine.

Writing Your Own

Students and teachers who enjoy adventures often long to put their experience to use in an adventure of their own. Few, however, have the programming skills necessary to do so.

Genesis for the TRS-80 from Time Management Software of Cushing, OK, is a program that can make their wishes come true. The new adventure can be recorded on disk and offered as a challenge to other members of the class. The program includes a well written tutorial that enables the user eventually to create a game of whatever complexity he chooses. Prospective authors should, however, be experienced adventurers before they try to write games of their own.

Summary

Whether in the classroom or at home, adventures and simulations offer a high quality educational experience for young people. The problem solving techniques learned in an underground cave or on a space ship can be applied in many of the situations students will face in real life. Tackling these problems in a group can be particularly beneficial as students learn from each other, and I recommend adventures to any teacher who wants to add a new dimension to learning in his classroom. □

Hi-res and text	Quality of graphics[1]	Movement of characters by keyboard director	Level of difficulty[2]	Time required[3]	Student rating[4]	Hints available from company (mail or phone)	Complexity[5]	Suggested age	Price	Manufacturer Name, Address, Telephone Number
✓	4		3	3	3	✓	2	11+	$24.95	Adventure International P.O. Box 3435 Longwood, FL 32750 (305) 862-6917
✓	4		2	3	4	✓	2	11+	Cassette: $24.95 Disk: $39.95	Adventure International
✓	4		3	3	3	✓	2	11+	$24.95	Adventure International
	NA		1	1	2		1	11+	Cassette: $30.00 Disk: $39.95	Adventure International
✓	1		3	3	1		3	12+	$29.95	Adventure International
✓	2		3	3	2		5	10+	$39.95	Automated Simulations 1043 Kiel Ct. Sunnyvale, CA 94089
✓	3		2	2	2		2	10-12	$29.95	Automated Simulations
✓	3	✓	4	4	2		5	11+	$39.95	Automated Simulations
	NA		4	4	1	✓	3	12+	Cassette: $30.00 Disk: $35.00	Avalon Hill Game Co. 4517 Harford Rd. Baltimore, MD 21214

[1]5 = Best graphics [2]5 = Most difficult [3]5 = Longest to play [4]5 = Highest rating [5]5 = Most complex

Program	TRS-80	Atari	Apple	IBM	Fantasy Adventure Qualities	Historical/Scientific Qualities	Works for one person	Works for group of people	Has character development	All text	
Ultima			✓		✓		✓		✓		
Sword Thrust (6 scenarios)			✓		✓		✓	✓	✓	✓	
Volcanoes			✓			✓	✓	✓			
Rendezvous			✓			✓	✓	✓			
Creature Venture			✓		✓		✓	✓			
Mummy's Curse			✓		✓		✓	✓			
Starcross	✓	✓	✓	✓	✓	✓	✓	✓			
Deadline	✓	✓	✓	✓	✓		✓	✓		✓	
Zork I, II, III	✓	✓	✓	✓	✓		✓	✓		✓	
Community Search, Geography Search	✓		✓			✓		✓		✓	
Snooper Troopers		✓	✓	✓	✓		✓	✓			
Mission Asteroid		✓	✓		✓		✓	✓			
Mystery House			✓		✓		✓	✓			
Wizard and the Princess		✓	✓		✓		✓	✓			
Crantson Manor			✓		✓		✓	✓			
Ulysses and the Golden Fleece		✓	✓	✓	✓		✓	✓			

Hi-res and text	Quality of graphics[1]	Movement of characters by keyboard director	Level of difficulty[2]	Time required[3]	Student rating[4]	Hints available from company (mail or phone)	Complexity[5]	Suggested age	Price	Manufacturer Name, Address, Telephone Number
✓	4	✓	4	4	4		4	12+	$39.95	California Pacific 1615 5th St. Davis, CA 95616
	NA		3	4	3		4	10+	$29.95 ea.	C.E. Software 801 73rd St. Des Moines, IA 50312
✓	3		5	5	5		5	15+	$50.00	Earthware P.O. Box 30039 Eugene, OR 97403
✓	4		5	4	5	✓	5	12+	$39.95	Eduware Services, Inc. P.O. Box 22222 Agoura, CA (213) 706-0661
✓	3		3	3	2	✓	2	11+	$29.95	Highlands Computer Services 14422 S.E. 132nd Renton, WA 98056
✓	3		3	3	2	✓	2	11+	$30.00	Highlands Computer Services
✓	3		5	4	4	✓	3	14+	$39.95	Infocom, Inc. 55 Wheeler St. Cambridge, MA 02138
	NA		5	4	4		5	13+	$49.95	Infocom
	NA		5	4	3		3	14+	$39.95	Infocom
	NA		3	3	5	✓	4	10-14	$180.00 ea.	McGraw-Hill 1221 Ave. of the Americas New York, NY 10020
✓	3		2	2	5	✓	3	10-13	$44.95	Spinnaker Software 215 1st St. Cambridge, MA 02142
✓	3		1	1	4	✓	1	10+	Apple $19.95 Atari $24.95	Sierra On-Line 36575 Mudge Ranch Rd. Coarsegold, CA 93614
✓	3		2	2	4	✓	1	10+	$24.95	Sierra On-Line
✓	3		3	3	5	✓	2	10+	$32.95	Sierra On-Line
✓	3		3	3	4	✓	2	11+	$34.95	Sierra On-Line
✓	4		4	3	5	✓	2	11+	Apple $34.95 Atari $39.95	Sierra On-Line

[1] 5 = Best graphics [2] 5 = Most difficult [3] 5 = Longest to play [4] 5 = Highest rating [5] 5 = Most complex

Program	TRS-80	Atari	Apple	IBM	Fantasy/Adventure Qualities	Historical/Scientific Qualities	Works for one person	Works for a group of people	Has character development	All text	
Time Zone			✓		✓	✓	✓	✓			
Transylvania			✓		✓		✓	✓			
Adventure in Time		✓	✓		✓	✓	✓	✓		✓	
Birth of the Phoenix		✓	✓		✓		✓	✓		✓	
Queen of Phobos			✓		✓		✓	✓			
Ali Baba & the Forty Thieves		✓	✓		✓		✓	✓	✓		
Copts and Robbers			✓		✓		✓				
Escape from Rungiston			✓		✓		✓	✓			
Wizardry			✓		✓		✓	✓	✓		
Knight of Diamonds (sequel to Wizardry)			✓		✓		✓	✓	✓		
Saturn Navigator			✓			✓	✓	✓			
Space Vikings			✓		✓		✓				
Microbe		✓	✓			✓	✓	✓			
Odyssey			✓		✓		✓		✓		
Apventure to Atlantis			✓		✓		✓		✓		
Mask of the Sun					✓		✓				

Hi-res and text	Quality of graphics[1]	Movement of characters by keyboard director	Level of difficulty[2]	Time required[3]	Student rating[4]	Hints available from company (mail or phone)	Complexity[5]	Suggested age	Price	Manufacturer Name, Address, Telephone Number
✓	4		5	5	5	✓	3	12+	$99.95	Sierra On-Line
✓	3		3	3	5	✓	3	10+	$29.95	Penquin Software 830 4th Ave. Geneva, IL 60134
	NA		3	3	3	✓	2	11+	$29.95	Phoenix Software, Inc. 64 Lake Zurich Dr. Lake Zurich, IL 60047
	NA		3	3	4	✓	4	10+	$22.00	Phoenix Software, Inc.
✓	4		3	3	3	✓	2	13+	$34.95	Phoenix Software, Inc.
✓	3	✓	3	3	3		3	11+	$32.95	Quality Software 6600 Reseda Blvd., Suite 105 Reseda, CA 91335
✓	2		1-2	1-2	3		2	10-11	$34.95	Sirius Software, Inc. 10364 Rockingham Dr. Sacramento, CA 95827
✓	3		4	4	2	✓	3	13+	$29.95	Sirius Software, Inc.
✓	3		4	5	5		5	11+	$49.95	Sir-Tech Software, Inc. 6 Main St. Ogdensburg, NY 13669
✓	3		4	4	5		5	11+	$34.95	Sir-Tech Software, Inc.
✓	4		5	4	5		5	12+	$34.95	Sublogic Communications 13 Edgebrook Dr. Champaign, IL 61820
✓	3		4	4	1		4	13+	$49.95	Sublogic Communications
✓	4		3-5	2-5	5	✓	2-5	11+	$44.95	Synergistic Software 830 N. Riverside Dr., Ste. 201 Renton, WA 98055
✓	2		3	5	2		3	11+	$29.95	Synergistic Software
✓	4		4	4	3		4	13+	$39.95	Synergistic Software
✓	4		4	4	2		4	13+	$39.95	Ultrasoft

[1]5 = Best graphics [2]5 = Most difficult [3]5 = Longest to play [4]5 = Highest rating [5]5 = Most complex

The ABC's of TI Software

Sherrie Van Tyle

Many buyers of low-cost computers select the TI 99/4A because of Texas Instruments' reputation for superior educational software. Does the software help a child develop reading and arithmetic skills, or does it merely dress up ordinary drills in colorful graphics and charming music? Let's have a look.

Early Learning Fun

Early Learning Fun from Texas Instruments offers drills in numbers, shapes, sorting, and the alphabet for children ages three to six.

The child will need a parent's help to follow the on-screen instructions and to become familiar with the computer keyboard. During the drills, the child matches the letter or number on the screen with the letter or number on the keyboard. The spacebar is used only to repeat a drill; the zero key tells the computer to go on to the next drill.

The exercises are arranged from the easiest—number and shape recognition—to more difficult drills in sorting and the alphabet. The drills are arranged to reinforce one another. For example, in the first set, a number appears on-screen for the child to match; the second set reverses the drill, asking the child to pick a number, which then appears on screen.

If the child presses the correct number, a series of musical notes chimes, and a matching number of brightly colored shapes appears. If the child's response is wrong, a deep tone sounds, and the child must try again until he finds the correct number. No score is kept.

According to the instructions, during the number drill the child "learns that the numeric symbol . . . represents a concrete quantity of things," The shapes that accompany the numbers are two-dimensional. Although a child may recognize the shape of the number 2, he may need tangible examples to understand the idea of two. You could, for example, group a set of blocks near the computer in increments up to 10 and have the child pick up the appropriate number of blocks.

The sorting drill sharpens cognitive skills. The child, presented with four shapes, must pick out the one that is unlike the rest and press the number next to that shape. This is more difficult than matching shapes and takes time to master.

During the alphabet drill, you may want to help the child think of other words that

creative computing
SOFTWARE PROFILE

Name: Early Learning Fun

Type: Educational

System: TI 99/4A

Format/Language: Cartridge/machine

Performance: Very good

Ease of Use: Good

Documentation: Good

Price: $29.95

Summary: Number and alphabet recognition, sorting and counting drills for preschoolers.

Overall Mark: Good

Manufacturer:
Texas Instruments
P.O. Box 53
Lubbock, TX 79408
(800) 858-4565



Early Learning Fun

Beginning Grammar

WHEN EAGLES FIRST RULED THE SKIES...

EAGLES™ flies you over France during World War I to join the men who first rose to the skies like some glorious birds of prey. This realistic strategy simulation gives you fourteen historic planes — including the feared Fokker DR-1 Triplane (the Red Baron's favorite) and the legendary Sopwith Camel — each accurately rated for such traits of climb and maneuverability. If you like, you can even fly planes of your own creation. You can play solitaire against enemy planes flown by the computer, or against other players. Fly balloon-busting missions, set up duels between aces or aircraft, or create grand dogfights involving as many as twenty planes. Choose historic scenarios, or let the computer set up the battles.

So head on down to your nearest computer/software or game dealer and get your wings today!

SSI

WRITE FOR A FREE COLOR CATALOG OF ALL OUR GAMES

Addition and Subtraction 2

Alligator Mix

begin with the same letter. Vowels, of course, have several different sounds each. Phonic flash cards could be used to supplement the alphabet drill.

Early Learning Fun delivers the fun it promises. On his own, a child enjoys the music and graphics and becomes acquainted with the computer. If the parent and child play together, with the addition of concrete examples and phonic practice, the software becomes educational.

Beginning Grammar

Beginning Grammar from Texas Instruments introduces the parts of speech to children in grades two to five. Children must be familiar with the computer keyboard because the drills use a combination of the spacebar, numbers, and letters.

Seven of the eight parts of speech are defined and presented in the drills (interjections are omitted). The prepositions and conjunctions, however, are combined in one drill; this confuses a child. The definition of a pronoun as a word that "relates a noun or pronoun to another word in the sentence" is too vague, especially when a conjunction is defined as a word that "joins words or groups of words together."

The definitions of nouns, verbs, pronouns, and adverbs are straightforward. A child learns shortcuts quickly—many adverbs end in *ly* and conjunctions are easily memorized in a rhyme, "and, or, but, nor." A parent or teacher can give specific examples of how prepositional phrases work in a sentence or act them out for the child: in a box, out the door, and under the chair.

Graphics are used cleverly: adjectives are displayed on a restaurant menu; adverbs on a theater marquee. Verbs are lifted off the screen. For nouns, the child moves the word selected by the computer into one of four slots: person, place, thing, or not a noun.

As in *Early Learning Fun*, the computer responds to a wrong answer with a low sound; for a correct answer, a short tune plays. Scoring is understated; a correct answer is worth one point, and the score is totaled in a small box at the lower right of the screen.

If the child hesitates for more than 30 seconds, the computer flashes a help screen that asks if he wants to see the instructions, redo the drill, or continue. Most children learn quickly where the AID key is. When the child is searching for the keys to type a word, the help screen merely interrupts and irritates.

Few elementary students are skilled touch typists, but in *Beginning Grammar*, the child must shift between the spacebar, letters, and numbers to enter answers. Presumably, the spacebar could have been used throughout the program. If the child types a wrong letter, however, the low tone sounds and the space for the letter remains blank. After two wrong answers, the computer points out the correct response.

Beginning Grammar is a more entertaining way to learn the parts of speech than to diagram sentences. If the parent or teacher considers it an introduction and provides further explanation, especially of the exceptions to the rules, the drills are worthwhile. Despite its shortcomings, children enjoy working with the parts of speech in *Beginning Grammar*.

creative computing

SOFTWARE PROFILE

Name: Beginning Grammar

Type: Educational

System: TI 99/4A

Format/Language: Cartridge/machine

Performance: Good

Ease of Use: Fair

Documentation: Fair

Price: $29.95

Summary: Clever graphics introduces the parts of speech.

Overall Mark: Good

Manufacturer:
Texas Instruments
P.O. Box 53
Lubbock, TX 79408
(800) 858-4565

Addition and Subtraction 2

Addition and Subtraction 2 from Texas Instruments was developed by Scott, Foresman and Company. The drills, for elementary students, are arranged in nine sets, starting with a review of numbers 0 to 18.

The drills are structured carefully; addition of numbers horizontally is followed by addition vertically; then three numbers are added horizontally. To go on to the next set, the child must answer 80% of the problems correctly.

Each drill starts with a tutorial. Along with the problem, the appropriate number of colored bars and objects are displayed on screen. When the numerals are added in the problem, the bars and the objects combine too. For young children, the concrete examples are important for them to understand what addition and subtraction mean, and the child may ask for another example. With larger numbers, the screen grows too crowded, however. The bars are small and difficult to count.

To enter an answer, the child presses the number keys. If the answer is wrong,

WordPerfect

A word processor should be an extension of your mind.

A good word processor should feel comfortable, and let you put your thoughts down quickly, almost effortlessly. It should have automatic everything, and include footnotes, merge, columns and math. The screen should be uncluttered and give you an honest view of your text without annoying codes. WordPerfect does all this and has proven itself at places like Harvard, RCA, State Farm, and Texaco. The software is well documented, is guaranteed, and is available for immediate delivery.

Available on Data General, IBM PC, Visor 9000 and Zenith Z-100 with others to be announced soon.

SSI

SATELLITE SOFTWARE INTERNATIONAL

288 WEST CENTER
OREM, UTAH 84057

(801) 224-6564 (800) 321-2808
TELEX 453-168

CIRCLE 248 ON READER SERVICE CARD

the computer places a red x over the answer. The message "try again" appears. If the child answers incorrectly a second time, the computer provides the right number.

The rewards for correct answers are ingenious graphics: an airplane tows a "way to go" sign across the top of the screen, a train chugs along the bottom, and a car inches ahead on a two-lane highway. A short tune accompanies the graphics.

creative computing
SOFTWARE PROFILE

Name: Addition and Subtraction 2

Type: Educational

System: TI 99/4A, speech synthesizer optional

Format/Language: Cartridge/Machine

Performance: Good

Ease of Use: Very good

Documentation: Good

Price: $39.95

Summary: Comprehensive drills in addition and subtraction of numbers up to 18.

Overall Mark: Very good

Manufacturer:
Texas Instruments
P.O. Box 53
Lubbock, TX 79408
(800) 858-4565

Level nine is a review of the addition and subtraction skills the child has learned. If the child answers at least 20 of the 24 problems correctly, he goes on to Extra for Experts, which approaches elementary algebra in skill.

In sum, *Addition and Subtraction 2* is well designed to sharpen arithmetic skills in young children. If the child works his way through the nine sets, he will have mastered elementary addition and subtraction.

Alligator Mix

Alligator Mix from Texas Instruments was developed by Jerry Chaffin and Bill Maxwell of the University of Kansas. *Alligator Mix* is an arcade-style drill in addition and subtraction for children ages 5 to 12.

The game is set in a swamp populated by alligators and apples. The object is to solve the addition or subtraction problem that appears in the apple, matching it with the solution that appears on the alligator's body. If the answer matches, the child opens the alligator's mouth by pressing the spacebar or the fire button on the joystick. If the answer on the alligator is wrong, the child does nothing; the apple disappears. The child scores points either way.

If three problems are solved correctly, the eyes of the alligator surface; for four correct answers, the head appears; for five right, another alligator pokes his head up. Each time, the alligators appear closer to the center of the screen, shortening the time available to solve the problem in the apple. A total of five alligators may be in the swamp at one time.

If the child lets the alligator eat an apple that does not match the solution or if he fails to open the animal's mouth for a correct solution, a miss is tallied at the bottom of the screen.

When the child misses too often, the alligators do not surface as quickly. Three missed problems in a set and the child must start a new set of problems on the alligator one level below. When three alligators vanish, the game ends, and the scoreboard appears.

The game is preset for skill level seven, which is too advanced for most young children, for problems using numbers 0 to 9, and for two minutes of play. After the title screen, the skill level can be set from one to nine by pressing AID. At level one, the child has about seven seconds to solve the problem before the apple reaches the alligator. If the child wants to use joysticks, this choice must be entered on the options screen. The game plays better with the joysticks. For young children, limiting the range of problems to numbers 0 to 3 makes it less frustrating.

Adults enjoy *Alligator Mix* because of its arcade-style play. The instructions say the child learns essential mathematical principles while he plays. To enjoy the game, however, he must understand the concepts of addition and subtraction. The game makes repetitious drills fun, but the child is merely practicing skills he already has. Of the four TI software packages reviewed here, only *Alligator Mix* misses the educational mark. □

creative computing
SOFTWARE PROFILE

Name: Alligator Mix

Authors: Jerry Chaffin and Bill Maxwell

Type: Educational

System: TI 99/4A, joysticks recommended

Format/Language: Cartridge/machine

Performance: Good

Ease of Use: Fair

Documentation: Adequate

Price: $39.95

Summary: Arcade-style addition and subtraction drills. More game than education. Also programmed in five foreign languages.

Overall Mark: Fair

Manufacturer:
Texas Instruments
P.O. Box 53
Lubbock, TX 79408
(800) 858-4565

"He overdosed on skills games!"

ALPHA-PAC

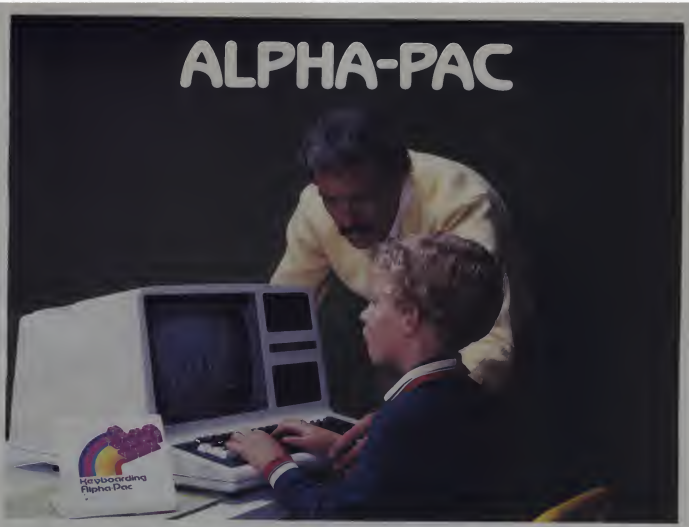

The Way To KEYBOARDING Success

Animated graphics are the stepping stone to learning the keyboard. KEYBOARDING—ALPHA-PAC features animated graphics galore!

This exciting NEW touch keyboarding program teaches the letter keys one step at a time. It shows you which fingers should strike which keys. It even shows you how to sit properly at your keyboard and the correct way to position your hands over the keys. What's more, the illustrations are animated—they move! So you can *see* how to move your fingers and how your hands should look when you keyboard properly.

The directions, illustrations, exercises, and user-input all appear on the display screen. As you practice, the program leads the way. An illustration of the keyboard remains on the screen for the first exercises. You can refer to the illustration on the display screen instead of looking at the keyboard. How handy!

When you make a mistake, 2 things happen:

1. The keyboard locks up until you strike the right key.
2. The correct key flashes on the illustrated keyboard on the screen until you find it and can continue with the exercise.

This user-friendly, easy-to-use program can be completed in no time. In fact, the 30 short lessons require only about 25 minutes each.

Keyboarding has never been so easy—or so much fun.

Clip out this handy coupon and mail today to receive your copy(ies) of KEYBOARDING—ALPHA-PAC.

Please send me _____ KEYBOARDING—ALPHA-PAC diskette package(s), for the following hardware:

- ☐ TRS-80™ Model III or 4, 48K minimum
- ☐ Apple® IIe, 64K minimum

Name _____

Address _____

City _____ State _____ ZIP _____

Phone number (_____) _____

CC

- ☐ I have enclosed $79.50 for each package ordered, plus $1.50 per package for postage and handling (check or money order).*
- ☐ Please bill to my VISA:
- ☐ Please bill to my MasterCard:

No. _____

Expiration Date _____

Signature _____

*Make check or money order payable to:
South-Western Publishing Co.

Mail your order to:
South-Western Publishing Co.
Attn: Benjamin H. Willard
5101 Madison Road
Cincinnati, OH 45227

CIRCLE 243 ON READER SERVICE CARD

creative computing software evaluation

Joust Comes Home

Owen Linzmayer

I've always loved arcade games in which two people can play simultaneously. Rather than simply competing against computer-driven opponents, you must contend with yet another variable: the other player. Arcade owners enjoy the larger profits that two-player games invariably generate. Some of my past favorites have been Rip-Off, Eliminator, and Space War.

In recent months, two-player games have become much more sophisticated and complex. William's Joust, one of the most popular of this new breed, has finally reached the home front in the form of *Lancer* for the TRS-80 Color Computer and *Clash* for the Model I/III.

The real thing: Joust in the arcades.

Joust

Manufactured under the Williams name, Joust has proven to be one of the most popular arcade titles of 1983. It continues to rank high on the earnings chart published by *Play Meter* magazine, the coin-op industry bible.

In Joust, you are represented by a knight riding upon a mythological flying bird. Using a bi-directional joystick and a "flap" button, you must fly around the screen and unseat enemy riders. To knock a knight off his mount successfully, the lance that you wield must be higher than his when your two birds make contact.

When you play with a human opponent, you are confronted with more complex and intriguing waves of enemies and you must make additional strategy decisions. Most important, you must decide whether to compete or cooperate.

Lancer

With an enviable reputation for producing quality coin-op adaptations, Spectral Associates has recently introduced *Lancer* by Rick LaMont. Designed for use on a 32K TRS-80 Color Computer, *Lancer* does such a good job of emulating Joust that I find it difficult to believe that I don't have to drop in a quarter after every play.

After you load the copy-protected program, the entire screen turns either blue or red. You press the reset button on the back of the Color Computer until the screen is red to ensure that the colors are correct during game play. The program

ENTER THE REALM OF ADVENTURE

APPLE • ATARI

APPLE

APPLE • ATARI

APPLE

APPLE

APPLE • ATARI • IBM

APPLE

The foremost producers of the adventure game invite you to explore an exciting realm. Explore history and captivating new worlds in the familiar surroundings of your home. Find all of these adventures at your local software dealer or contact: Sierra On-Line, Sierra On-Line Building, Coarsegold, Calif. 93614. Phone (209) 683-6858

Sierra ON-LINE

THE DARK CRYSTAL and character names are trademarks of Henson Associates, Inc.
HI-RES ADVENTURE, SIERRAVENTURE and all other product titles are trademarks of Sierra On-Line, Inc.

CIRCLE 227 ON READER SERVICE CARD

Lancer. A one-person game in progress. Player is at the top of the screen, about to collide with an enemy rider.

Clash. Bat wave in process. The player is in the middle of the screen. Note the spike forming on the ceiling.

then asks you how many people will play, their names, and the difficulty level (0-15) at which they want to play.

The game screen looks very much like that of Joust (see photos). All of the ledges and portals are located in the same positions, and the score is displayed at the bottom. Your mount sparkles as if materializing whenever it enters the playfield. If after five seconds you do not press a control, it solidifies, and your state of immunity is over. *Lancer* plays best with Atari switch-type controllers rather than the Tandy potentiometer joysticks.

The enemy riders are silver and ride on blue buzzards. Since both of the players' knights are red and aren't distinguishable, you must carefully keep track of your own position on the screen to avoid confusion and conflict. The hi-res graphics are top-notch—right up there with DataSoft's *Zaxxon* and Intracolor's *Robotattack*. There is a myriad of colors in the pain-stakingly detailed graphic characters. The components in *Lancer* mimic the actions of those found in Joust almost to a tee; the wings flap, the eggs bounce, and the necks of the birds bob back and forth as they fly across the screen.

The game is broken into waves, each with its own special objective. On the energy waves, you must race around the screen and pick up all the eggs before they hatch. Team waves require you to cooperate with your partner if you wish to collect a bonus. On the eighth wave you must avoid the deadly "invincible" dragon. Every wave in Joust has an equivalent in *Lancer*—you don't miss out on a thing.

The best word to describe the sound effects of *Lancer* is spartan. Luckily, the exciting game play and excellent graphics make up for the lack of first-rate audio effects. The one other thing I find fault with is the sluggishness of the controls. *Lancer* doesn't give you that perfectly smooth, fluid movement found in other games. Part of the problem probably lies with the slow 6809 microprocessor inside the Color Computer, but I am convinced that the game could function quicker and more efficiently. At times it feels as if you are playing in an atmosphere with high gravity. With practice, though, you can perform graceful landings and aerobatics just as you do in Joust.

Lancer stands among the top Color Computer games of the year. If Oscars were awarded to computer programs, I would nominate *Lancer* without a second thought. I recommend that you go out and play a game of Joust. If you like it, purchase a copy of *Lancer*. You won't be disappointed.

creative computing

SOFTWARE PROFILE

Name: Lancer
Author: Rick LaMont
Type: Arcade
System: 32K TRS-80 Color Computer; joysticks
Format: Tape/disk
Language: Assembly
Summary: Joust in its finist form.
Price: $21.95/$24.95
Manufacturer:
Spectral Associates
141 Harvard Ave.
Tacoma, WA 98466

Clash

Just because the TRS-80 Models I and III produce only lo-res, monochrome graphics doesn't mean that software houses can't create great game programs for these systems. And don't be misled into believing that TRS-80 games are less fun to play than their Color Computer counterparts. *Clash*, another Joust adaptation, attests to this.

Written by Bill Dunlevy, *Clash* borrows heavily from Joust, but does not attempt to pass itself off as a clone of the coin-op game. The basic concept is the same: you ride upon a flying bird and must defeat enemy creatures by colliding with them. But *Clash* turns some very interesting twists that make it different from any other game available. Instead of always going head-to-head against a human opponent, you must also combat eerie creatures such as cave spiders and bats. And don't forget to be on the lookout for spikes that drop from the cavern ceilings when you least expect it.

Before the action begins, you select the difficulty level you wish (1-4). Each level consists of five separate waves, and by choosing a higher starting level you can

creative computing

SOFTWARE PROFILE

Name: Clash
Author: Bill Dunlevy
Type: Arcade
System: 16K TRS-80 Model I/III
Format: Tape/disk
Language: Assembly
Summary: Worth every penny.
Price: $21.95/$24.95
Manufacturer:
Computer Shack
1691 Eason
Pontiac, MI 48054
(313) 673-2224

NOAH WEBSTER, MEET YOUR MATCH.

A few months ago, Jennifer would rather have gone to the dentist than do her spelling homework.

Then Mom bought Crypto Cube™ by DesignWare. Now Jennifer has become a word fiend. In fact, she spends hours paging through the dictionary to find words that will stump her parents. And, as she does, she builds her word skills.

Crypto Cube, like all DesignWare software products, combines computer game fun with sound educational principles.

THE THREE DIMENSIONAL COMPUTER WORD PUZZLE.

Five minutes after Jennifer sat down at the computer with Crypto Cube, she was hooked. First she worked her way through the many word puzzles that come with the game. Then her parents typed her spelling homework into new puzzles.

Then Jennifer started making up rules for her parents!

Soon, Crypto Cube is the favorite family game in Jennifer's home.

As Jennifer would say, "It's terrific!"

DESIGNWARE MAKES LEARNING COME ALIVE.

If you have an Apple® (plus, Apple IIe, IBM PC, Atari 400, 800, or 1200XL with a disk drive, you should take a close look at all the DesignWare software.

Another word game, Spellagator™, is an action-packed spelling game. You'll fly past alligators through swamps and streams and even a volcano to rescue words. And you'll want to keep an eye on the computer, both at home and school. See your local dealer or call DesignWare toll-free at (800) 227-2346 (in California (415) 540-6366) for the free, full-color catalog. You'll be delighted with the way your kids will learn with DesignWare.

And they'll be playing for the fun of it.

DesignWare

LEARNING COMES ALIVE.

CIRCLE 148 ON READER SERVICE CARD

Shelf Conscious?

Now you can organize your copies of your Favorite Magazines

Now your magazines can be a handsome addition to your decor, well organized, and easy to find, thanks to these durable library quality cases or binders. They're made of luxury-look leatherette over high quality binders board. And both styles are custom-designed for most magazines you save, with sizes, colors, and imprints selected by the publishers. FREE transfer foil included for marking dates and volumes

Magazine binders
hold a year's issues on individual snap-in rods, combining them into one volume. $7.95 each, 3 for $22.50, 6 for $42.95. Mixed titles OK for quantity prices.

Open-back cases
store your issues for individual reference. $6.95 each, 3 for $19.75, 6 for $37.50. Mixed titles OK for quantity prices.

Charge Orders Only. TOLL FREE
800-526-0790. In NJ only 201-540-0445

Jesse Jones Box Corp., Dept. ZD, Philadelphia, PA 19141
Please send: ☐ Cases ☐ Binders QUANT
Title
Title
(ENCLOSED IS $ _____.* Add $1.00 per order for postage & handling. Outside USA add $2.50 per unit ordered. Send U.S. funds only.
CHARGE (Min. $10) ☐ VISA ☐ American Express ☐ MasterCard
Card# Exp. Date
Signature
Print Name
City, State, Zip
* PA residents add 6% sales tax

FIRST IN THEIR CLASS

Chatsworth Data offers a simple, low-cost alternative to keyboard entry. Whether you choose the OMR-500, OMR-2000 or 4000 Series, our mark sense readers assure you of fast, accurate and reliable data entry.

All readers offer extreme flexibility, accepting pencil marks, preprinted data or punched holes on different sized standard OMR cards. And, depending on the model, data can be entered automatically or hand-fed. Also, a large range of interfaces are available, including Apple, TRS-80, Commodore and Atari.

These lightweight, compact readers are ideally suited for a wide variety of applications—educational field, small businesses, personal computers, or virtually anywhere data entry is needed.

So, when you're faced with a data entry requirement, check out Chatsworth Data mark sense readers first and find out why they're truly first in their class.

CHATSWORTH DATA CORPORATION

20710 Lassen Street • Chatsworth, CA 91311 • (213) 341-9200

CIRCLE 274 ON READER SERVICE CARD

Joust, continued...

skip the easier rounds. During each wave you are challenged in a different way. Sometimes you must simply unseat enemy riders, while at other times you must scoop up valuable gems (eggs) before they turn into dangerous spiders.

When compared to other arcade games for the TRS-80, *Clash* looks very good. The excellent animation of the characters is what sets it apart from the rest of the pack. The sound effects are also commendable. If you have the disk version of *Clash* and you connect the AUX jack to an amp/speaker, you are treated to voice effects in addition to the audio. The speech is very crisp and recognizable.

The game plays very well. The players' mounts move rapidly and seem to be quite responsive to either form of control. Whereas *Lancer* has a slow moving feel to it, *Clash* bustles along at a rapid pace. Even when there is a large number of objects on the screen simultaneously, everything flows smoothly, and the animation rarely appears to flicker.

Clash has both one- and two-player modes and can be played with either a joystick or the keyboard. Unlike many other games that cramp both players at the keyboard, the key controls in *Clash* are spaced well for two people. The keyboard is also used to advance the menu, select number of players, pause/continue the game, enter high scores, and choose a starting difficulty level.

Both the cassette and disk versions have daily and all-time high score charts. If you qualify for either, you can input up to 19 characters to accompany your score. The all-time high scores are saved immediately to disk as a permanent record. Users of cassette versions can save and load scores using a tape recorder.

TRS-80 owners need not sulk as long as exciting arcade games such as *Clash* are on the market. While not as visually appealing as *Lancer*, *Clash* incorporates all of the qualities of the coin-op game into a neat package that costs less than $25. Heck, that's only half as much as I pump into Joust in a week. □

"You have to be more precise than 'just a smidgeon' of sugar."

Apple*, Commodore*, Timex/Sinclair* . . .

by William B. Sanders

The idea of getting your own computer sounded wonderful. But now that you have it you're a little scared . . . you think it sounds so technical. Well, take heart. Relax. Help is here. William B. Sanders has written individual books about the Apple, the Commodore 64, and the Timex/Sinclair computers. When you select the one which matches your computer you can breathe easy because it'll be like having your all-time favorite teacher at your side . . . gently guiding you, explaining, and showing.

THE ELEMENTARY series sweeps away the confusion and explains your Apple, Commodore 64 or Timex/Sinclair in down to earth terms, coupled with enjoyable cartoons. It shows you how to hook it up, how to use the keyboard and work on the screen—all the unique things your computer can do so you can make use of it right away! And it also answers those questions you'll have about how to write your own simple programs, about graphics, utility programs, and various hardware options.

You'll see your ELEMENTARY book contains a lot of information. And, you'll also see that not one paragraph or chapter is dull or difficult to follow. Prove it to yourself. Visit your computer store. Open the book. Read a page of the introduction, then flip to any page and read a paragraph or so. You'll find it's as understandable, as helpful and as marvelous as we say.

We make them elementary.

DATAMOST

8943 Fullbright Ave., Chatsworth, Ca. 91311. (213) 709-1202.

VISA/MASTERCHARGE accepted. $2.00 shipping/handling charge. (California residents add 6½% sales tax)

*Apple, Commodore 64, and Timex/Sinclair are trademarks respectively of Apple Computer, Inc., Commodore Business Machines, Inc. and Timex Computer Corp. Copyright 1983 Datamost Inc.

CIRCLE 146 ON READER SERVICE CARD

creative computing software evaluation

Computer-Aided Physics Experiments

David H. Ahl

The CompTrol Lab is a software and hardware system for running computer-controlled physics experiments. The hardware is manufactured by Pasco Scientific and consists of an infrared photogate and an interface box.

The photogate is shaped like a large C, 4 ½" high. In one tip is an infrared light source and in the other, a detector. A base and 10" post hold the detector in an upright or inverted position.

The photogate plugs into a Pasco general-purpose interface which, in turn, plugs into the game port of the Apple computer. All power to the system comes from the Apple. Two transducers, such as photogates, thermistor probes, etc. can be connected simultaneously to the interface. (A third program in this series uses a temperature probe; we did not test it.)

creative computing

SOFTWARE PROFILE

Name: CompTrol Lab (Pendulum and Acceleration)
Type: Computer-run lab experiments
Author: John Elberfeld
System: 48K Apple
Format: Disk
Summary: Computer helps perform experiments.
Price: $325 (components are available separately)
Manufacturer:
EduTech, Inc.
634 Commonwealth Ave.
Newton Center, MA 02159
(617) 965-4813

Figure 1. Photogate (infrared light source and detector) and rules used in acceleration experiments.

Each set of experiments has a disk, instruction manual, and student manual (20 pages). The 14-page instruction manual describes the experimental apparatus for both the Pendulum and Acceleration experiments. It provides schematic diagrams of the circuits, set-up directions, and test programs to check out the apparatus. We found that everything was in order and quickly skipped to page 8 which describes the two experiments.

Pendulum

The first half of the Pendulum student manual is a theoretical discussion of pendulums. It contains the formulae relating period and amplitude as well as a discussion of the least squares method of fitting experimentally measured data points. It then describes the experiments and computer program. We had a bit of a problem setting up the experimental apparatus; the manuals have illustrations of the photogate, and a stylized drawing of a pendulum and detector, but there is no illustration of the entire apparatus.

Nevertheless, we fashioned a makeshift pendulum and started making measurements. With the aid of the computer, this is simplicity itself. There are

Figure 2. Pasco game port interface connects between Apple computer and experimental transducers.

LAST NIGHT, 39 MUSICIANS HAD A COMPUSERVE CONFERENCE, SO DID 31 M.D.S, 49 SPORTS FANS AND 640 APPLE POLISHERS, AND NO ONE HAD TO LEAVE HOME.

The Electronic Forum, Cheaper than Long Distance and Much More Rewarding.

Every night on the CompuServe Information Service, professional and social groups discuss a wide range of subjects. From what's new in medical technology to what's nouvelle in continental cuisine.

And every day more computer owners who share a common interest are discovering this exciting new way to exchange ideas and even transfer hard copy data.

And besides electronic forums, they leave messages for each other on our national bulletin board, "talk" informally on our CB simulator, and communicate via CompuServe's electronic mail.

But best of all, in most cases, CompuServe subscribers get all of these state of the art communications options, plus a world of on-line information and entertainment for the cost of a local phone call plus connect time.

To become part of this flexible communications network, all you need is a computer, a modem and CompuServe. CompuServe connects with almost any personal computer, terminal, or communicating word processor.

To receive an illustrated guide to CompuServe and learn how you can subscribe, contact or call:

CompuServe

Consumer Information Service P.O. Box 20212
5000 Arlington Centre Blvd., Columbus OH 43220

800-848-8199

In Ohio call 614-457-0802

An H&R Block Company

CIRCLE 141 ON READER SERVICE CARD

```
                RECORDED DATA
 1: 1.1606     6: 1.1714     11: 1.1715
 2: 1.1646     7: 1.1696     12: 1.1701
 3: 1.1697     8: 1.1708     13: 1.1678
 4: 1.17       9: 1.1698     14: 1.1699
 5: 1.1705    10: 1.168      15: 1.1662
STANDARD DEVIATION = 2.9E-03
MEAN = 1.1685   SD IS .24 % OF MEAN

ARE THESE DATA VALID (Y/N) - Y
```

```
D(1) - 15              T(1) - 1.1378
D(2) - 10              T(2) - 1.1398
D(3) - 20              T(3) - 1.1685
D(4) - 5               T(4) - 1.1383
D(5) - 15              T(5) - 1.1499
D(6) - 25              T(6) - 1.1921
```

```
          *** DATA EDITOR ***

D(1) - 10              T(1) - 1.1398
D(2) - 20              T(2) - 1.1685
D(3) - 5               T(3) - 1.1383
D(4) - 15              T(4) - 1.1499
D(5) - 25              T(5) - 1.1921

     1)  DELETE A DATA PAIR
     2)  ADD A DATA PAIR
     3)  PRINT DATA
     4)  CONTINUE

     (1, 2, 3, OR 4)? 3
```

```
***   SUMMARY OF THE ANALYSIS   ***

                 N
        T = MD    + B

M = 9.31015979E-05

B = 1.1321

N = 2

STANDARD DEVIATION = 3.23 MS
```

Figure 3. Pendulum Experiment. Top chart shows one set of data points. Second shows means of six sets of data. Third shows data editor after deleting first set of points. Fourth screen shows the analysis. The graph would not print.



Figure 4. Pendulum output on computer-produced plot.




```
THE BEST FIT TO THE DATA

IS GIVEN BY THE EQUATION

 S  = (0 CM) + (71.11 CM/SEC)T
  F
                    2     2
      + (966.14 CM/SEC )T /2

MOST POINTS HAVE AN ERROR

LESS THAN

8.3E-03 CM
```

Figure 5. Linear Acceleration Experiment. Graph shows good fit to experimental data, which is also indicated in the analysis below.

two experiments on the disk: Period and Amplitude, and Period and Length. For the first, you simply enter the horizontal displacement of the pendulum bob, enter the number of swings to be timed, and release the bob so it swings smoothly between the light and detector.

The computer measures the time between every other blocking of the light (one full period) for the number of swings you specified. It then displays the period of each swing, the average period, and standard deviation. It then asks if you are satisfied; if so, you can go on to the next measurement; if not, you can repeat a measurement.

If you botch it up completely, as we did on our first measurement, you can later go to the editing portion of the program and delete a set of data points. The procedure for doing this is not described in either manual; however, the menu-driven software is self-explanatory and easy to use.

When you have five or more sets of data, the computer will perform an analysis on the data for various values of n in the period/amplitude equation. The manual recommends trying all values of n from 0.5 to 3.0 in steps of 0.5 until you get the lowest standard deviation of the computed curve fitting your experimental points.

If you have a Silentype printer, the program will print out any of the screens as you progress through the experiment.

The Computer Book Club®

ENROLLMENT APPLICATION

Please accept my membership in The Computer Book Club® and send the 6 volumes circled below, billing me $2.95 plus shipping and handling charges. If not satisfied, I may return the books within ten days without obligation and have my membership cancelled. I agree to purchase 4 or more books at reduced Club Prices (plus shipping/handling) during the next 12 months, and may resign any time thereafter.

336 1050 1085 1160 1195 1251 1271
1275 1295 1369 1389 1391 1394 1398 1407
1427 1428 1449 1455 1468 1473 1478
1485 1489 1496 1506 1522 1523 1533 1620

Name _____ Phone _____

Address _____

City _____

State _____ Zip _____

Valid for new members only. (Orders outside the U. S. or Canada must be prepaid in International Money Orders in U. S. dollars. Canada must remit in U. S. dollars.) This order subject to acceptance by The Computer Book Club®

CC-1083

The Computer Book Club®

ENROLLMENT APPLICATION

Please accept my membership in The Computer Book Club® and send the 6 volumes circled below, billing me $2.95 plus shipping and handling charges. If not satisfied, I may return the books within ten days without obligation and have my membership cancelled. I agree to purchase 4 or more books at reduced Club Prices (plus shipping/handling) during the next 12 months, and may resign any time thereafter.

336 1050 1085 1160 1195 1251 1271
1275 1295 1369 1389 1391 1394 1398 1407
1427 1428 1449 1455 1468 1473 1478
1485 1489 1496 1506 1522 1523 1533 1620

Name _____ Phone _____

Address _____

City _____

State _____ Zip _____

Valid for new members only. (Orders outside the U. S. or Canada must be prepaid in International Money Orders in U. S. dollars. Canada must remit in U. S. dollars.) This order subject to acceptance by The Computer Book Club®

CC-1083

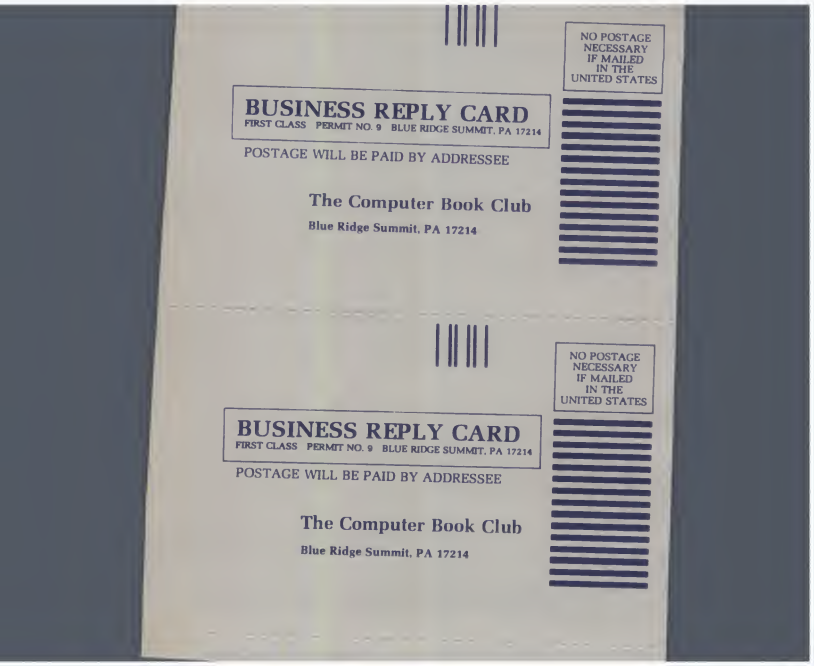

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD
FIRST CLASS PERMIT NO. 9 BLUE RIDGE SUMMIT, PA 17214

POSTAGE WILL BE PAID BY ADDRESSEE

The Computer Book Club
Blue Ridge Summit, PA 17214

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD
FIRST CLASS PERMIT NO. 9 BLUE RIDGE SUMMIT, PA 17214

POSTAGE WILL BE PAID BY ADDRESSEE

The Computer Book Club
Blue Ridge Summit, PA 17214

The Computer Book Club®

Your source for *software and books* at substantial savings!

More programs, more projects, more ways to use your micro for home, hobby, and business!

Select any 6 books for only $2.95 when you join

(values to $131.70)

1150
List $13.95

1369
List $21.95

338
List $15.95


1533
List $17.95

1398
List $16.95

1427
List $21.95

1620
List $16.95



1389
List $15.95

1468
List $18.95

1455
List $15.95

1523
List $17.95

1285
List $16.95

1478
List $19.95

1496
List $17.95

1449
List $19.95



1271
List $18.95


1480
List $16.95

1301
List $17.95


1050
List $13.95

1473
List $18.95

1275
List $14.95

1085
List $14.95



1195
List $13.95



1522
List $25.95

1407
List $17.95

1251
List $18.95

1394
List $15.95

1506
List $13.95

1485
List $21.95

1428
List $17.95

7 very good reasons to try The Computer Book Club

Blue Ridge Summit, PA 17214

- **Reduced Member Prices.** Save 20% to 75% on books sure to increase your computer know-how
- **Satisfaction Guaranteed.** All books returnable within 10 days without obligation
- **Club News Bulletins.** All about current selections—mains, alternates, extras—plus bonus offers. Comes 13 times a year with dozens of up-to-the-minute titles you can pick from
- **"Automatic Order."** Do nothing, and the Main selection will be shipped automatically! But . . . if you want an Alternate selection—or no books at all—we'll follow the instructions you give on the reply form provided with every News Bulletin
- **Continuing Benefits.** Get a Dividend Certificate with every book purchased after fulfilling membership obligation, and qualify for discounts on many other volumes
- **Extra Bonuses.** Take advantage of added-value promotions, plus special discounts; on software, games, and more
- **Exceptional Quality.** All books are first quality publisher's editions, filled with useful, up-to-the-minute information.

The Computer Book Club®

Blue Ridge Summit, PA 17214

Please accept my membership in The Computer Book Club® and send the 6 volumes circled below, billing me $2.95 plus shipping and handling charges. If not satisfied, I may return the books within ten days without obligation and have my membership cancelled. I agree to purchase 4 or more books at reduced Club prices (plus shipping/handling) during the next 12 months, and may resign any time thereafter.

336 1050 1085 1160 1195 1251 1271
1275 1295 1369 1389 1391 1394 1398 1407
1427 1428 1449 1455 1468 1473 1478 1485
1489 1496 1506 1522 1523 1533 1620

Name _____ Phone _____

Address _____

City _____

State _____ Zip _____

Valid for new members only. (Orders outside U.S. or Canada must be prepaid in International Money Orders in U.S. dollars. Canada must remit in U.S. dollars.) This offer subject to acceptance by The Computer Book Club®

CI-1081

CIRCLE 123 ON READER SERVICE CARD

Any, except the graph, that is. (The graph screens on the Acceleration disk print out well; those on the Pendulum disk do not. Too bad; it is one that students will want.)

The Period and Length experiment is similar, but relates the length of the pendulum string to the period of oscillation. Also on the disk is a program to calibrate the apparatus with a 60 Hz light source such as a fluorescent lamp.

Four pages in the student manual are provided for recording the results of the experiments. Teachers will surely want to reproduce these for all students.

Acceleration

The Acceleraton disk contains two experiments: Linear Acceleration and Constant Acceleration. One analysis procedure is provided for Linear Acceleration, while three are provided for Constant Acceleration: Distance and Time, Velocity and Time, and Velocity and Distance.

In contrast to the Pendulum student manual, this one combines the theoretical discussion, formulae, and directions for doing the experiment. But like the Pendulum manual, this one suffers from a lack of one simple illustration showing the experimental apparatus with all the pieces in place.

In the Linear Acceleration experiment, you drop a transparent ruler with strips of black tape on it through the photogate detector. The computer records and measures the time at which the leading edge of each strip breaks the light, plots the data points, and draws a best fit line between them.

Youngsters liked this experiment, although there wasn't really very much for them to do except drop the ruler and watch the computer do the analysis. They did find that dropping the ruler from a height of 50 cm or more resulted in its traveling so fast that the computer was unable to measure the acceleration.

The Constant Acceleration experiment required somewhat more participation and a great deal more coordination, as a plastic flag must be dropped (straight) from one hand and the spacebar pressed simultaneously with the other. As the manual warns, "this introduces a rather large random error in the experiment.... However, because the error is random its effect can be reduced by making repeated measurements at each height." Actually, this may be the right place for a discussion with students about accuracy. Compare the accuracy for the computer (seven figures) with the experimental measurements (two figures or less). Just because the final answer has five decimal places, is it really that accurate?

All in all, we found the CompTrol Lab a wonderful system for motivating some (but not all) students. We feel that it must be introduced in the proper perspective, i.e., "here is a valuable laboratory tool." It is not a replacement for precise experimental measurements, nor is it simply a way to avoid tedious calculation.

In addition to the two experiments marketed by EduTech, the apparatus will probably suggest numerous other possibilities. We think the CompTrol Lab is worth an investment of $325 for any school physics lab with access to an Apple. □

"Putting slugs into video machines — that's why you're here!"

BLYTHE VALLEY SOFTWARE MEANS BUSINESS

Joining our home/educational line of products are two new business programs with more on the way. Watch for them in our advertisements or in your dealer's showroom in the near future.

SUPERPLOT

SUPERPLOT is an easy to use plotting routine for generating high resolution graphs on your printer. You may create character plots, line plots and simulate smooth curves using the capabilities of your printer without the need for a color/graphics card. The simple data format is easy to read and write with a BASIC program and may be used in combination with other programs you or others may write.

(System Requirements: IBM PC* 128K and Epson* printer with Graphtrax+)

Sug. Ret. $59.95

PAIRSTAT

PAIRSTAT is a multi-purpose, paired data statistical package. This collection of programs has been designed as a powerful tool for analysis of certain business, scientific and engineering data. PAIRSTAT'S many uses include interpreting experimental data, finding optimums, determining trends and displaying one or more sets of data on a printed graph. As with SUPERPLOT, no color/graphics card is required.

(System Requirements: IBM PC* 64K IBM* or Epson* printer with Graphtrax+)

Sug. Ret. $129.95

IBM and IBM PC, Epson and Graphtrax are trademarks of IBM Corporation and Epson America, Inc. respectively.

BLYTHE VALLEY SOFTWARE

P.O. BOX I. OAKHURST, CALIFORNIA 93644, (209) 683-4735

CIRCLE 117 ON READER SERVICE CARD

The Best Just Got Better

Introducing the new Strobe Models 260 and 200 Graphics Plotters. How do you make the world's most cost-effective graphics system even more remarkable? Simple. Make it easier to use, more powerful, more versatile and more attractive. The hard part is doing all of the above while holding the line on a very affordable price. With the new Models 260 and 200 Graphics Systems, Strobe has done it all. And the benefits are all yours.

The Strobe 260 is the first eight-pen plotter and software package available for under $1,000. With just a few keystrokes on your computer, the system produces superb high-resolution charts, drawings and transparencies with up to eight automated color breaks. The even more economical Model 200 produces the same wide range of graphics with a single pen which may be changed manually.

The new Strobe plotters interface with virtually every popular microcomputer made today, including the Apple II, IIe and III, Victor, IBM PC, Kaypro and Osborne systems. What's more, the StrobeWare software programs provide every graphic format you will probably ever need, including multicolor pie charts, bar graphs, line graphs, text processing, and a broad selection of symbols and character styles. To further increase your capabilities, the new Strobe systems also interface with over 40 other popular graphics programs.

Every feature of the new Strobe Graphics System is designed to give you the highest quality graphics quickly, easily and inexpensively. The system also looks very nice on your desk. So visit your local dealer today and see how much better the best can be.



Apple II, IIe and III, Victor, IBM PC, Kaypro and Osborne are trademarks of Apple Computer, Inc., Victor United, Inc., International Business Machines Corporation, Kaypro Corporation, and Osborne Computer Corporation, respectively.

Strobe Inc.
897 S-A Independence Ave.
Mountain View, CA 94043
415/969-5130

The Strobe Graphics System

Seeing is believing

CIRCLE 249 ON READER SERVICE CARD

9,250 APPLES FOR THE TEACHER

Ken Uston

In May, 1983, Apple Computer, Inc. announced a program called Kids Can't Wait (KCW). The primary objective of the program is to place an Apple IIe computer system in each of the roughly 9250 eligible elementary and secondary schools in California. (Schools with fewer than 100 students do not qualify for the program.)

Apple tried earlier, in vain, to originate a similar program on a national level. Apple's chairman, 28-year old Steve Jobs, ran into U.S. Congressman Fortney "Pete" Stark on an airplane flight. The two found themselves discussing student computer literacy and tax exemptions for companies donating computers to schools.

As a result of this encounter, Stark introduced a bill in 1982 in the House of Representatives providing for substantial tax credits for contributing companies. The bill allowed tax deductions based on fair market value, rather than cost, which could not exceed 200% of the cost to donors. Apple representatives calculate that, based on the maximum 46% federal corporate tax rate, the contributing companies would end up paying about 8% of the cost of donated equipment.

The bill passed the House overwhelmingly, but came to naught because it never reached the floor of the Senate during the unproductive lame duck session called by President Reagan in late 1982.

Apple is offering a free Apple IIe system to every eligible elementary and secondary school in California.

Because Apple pays substantial amounts of California corporate taxes, they simultaneously pursued the matter on a state level in Sacramento. This effort succeeded. On September 29, 1982, a bill sponsored by Assemblyman Charles Imbrecht passed in the California legislature. The bill provides that companies donating computer equipment to California public and private schools would get a 25% tax credit (that's credit, not deduction) from their California taxes based on the fair market value of donated equipment (that's fair market value, not cost). The law went into effect on January 1, 1983 and expires on June 30, 1984.

Apple launched their Kids Can't Wait program in January, 1983. Steve Jobs appointed a full-time KCW project director, Stephen Scheier, and set up an ad hoc team, which currently consists of four people. The team will operate until

SJB DISTRIBUTORS. THE MOST COMPETITIVE PRICES ON COMMODORE.

commodore

NEW COMMODORE PRODUCTS

The Executive 64	Call
CBM B128-80	$ 825
CBM B256-80	1095
CBM BX700	2990
B Series Software	Call
CBM 1520 Plotter	169
CBM 1526 Printer	349

SOFTWARE FOR CBM 64/128

BUSINESS

WordPro 3+/64 w/Spell Right Plus	$ 79
Spell Right Plus	55
Calc Result (Advanced)	125
Calc Result (Easy)	75
Busicalc II	95
Mirage Concepts (Powerful Data Base)	95
M File (merge with WordPro)	89
Home Utilities	49
64 Mailing List (Galactic)	28
The Manager	50
Home Accountant (continental)	75
Code Writer (Writes Basic Programs)	95
Stock (investment analysis)	80
Agricultural Management	Call
General Ledger, A/R, A/P, P/R, Inv	Call

RECREATION

Assembler Package (cassette or disk, compiled, includes editor, loader, disassembler)	39
Sprite Master (access)	30
Neutral Zone (access)	35
Space Belt	19
Pet Emulator	30
Coco II (build your own games)	40
Vic Tree (programmers utilities)	75
Micro-Term (save ta printer,disk)	39
Hesmon	35
Synthesound	45
Gothmogs Lair	30
Road Toad	15
Commodore Games	Call

INTERFACES & ACCESSORIES

80 Column Expander	$159
VIC 1600 Modem	95
VIC 1650 (auto answer, auto dial)	150
VIC 1525 Graphic Printer	225
VIC 1530 Datasette Recorder	65
VIC 1541 Disk Drive	249
VIC Switch (connect 8 64's or Vics to printer, dd)	149
PET-IEEE cable	33
IEEE-IEEE cable (2m)	49
5 Slot Expander for 64	65
Parallel Interface (Epson, Okidata, IDS, NEC)	70
Programmers Reference Guide	18
Verbatim Diskettes (10 per box)	26
Hes Modem	75
ADA 1450	149
ADA 1800 (new)	129
Numeric Keypad	35

VIC PRODUCTS & ACCESSORIES

8K RAM Memory Expansion Cartridge	$ 40
16K RAM	70
24K RAM	105
VIC 3 Slot Expander	27
VIC 6 Slot Expander	70
Gorf (64 also)	30
Omega Race	30
Arcade Joystick - Heavy duty w/2 firing buttons! Great for the VIC or 64	25
Auto Clock	125

MONITORS - GREAT RESOLUTION (64 OR VIC)

CBM 1701 Color Monitor	$ 249
Amdek Color Plus	299
Panasonic TR-120 (w/speaker)	155
Panasonic CT-160	279
BMC (green screen)	95
Video/Audio Cable	15

PRINTERS - LETTER QUALITY

CBM 6400, 40 cps	$1450
Diablo 620, 25 cps	949
Transtar 140 (serial)	1395
Transtar 130, 16 cps (auto load, wp features!)	769
NEC 3500 Series	1600
NEC 7700 Series	2350

PRINTERS - DOT MATRIX

CBM 8023, 150 cps/graphics	$ 545
CBM 4023 Printer	395
Epson FX Printer, 160 cps	549
Epson MX-80 FT w/graftrax	Call
Epson FX-100	859
Okidata 82A, 120 cps (serial and parallel)	429
NEC 8023A (parallel)	429
Okidata 92	559
Star Gemini, 10X	329
Star Gemini, 15	499
Transtar 315 (hi-res, color)	575

COMMODORE BUSINESS SERIES

SuperPet (5 languages, 2 processors)	$1059
CBM 8032 Computer, 80 Column	625
CBM Memory Expansion, 64K	259
CBM 8050, 1 mg. Dual Drive	995
CBM 8250, 2 mg. Dual Drive	1295
CBM D9060, 5 mg. Hard Disk	1995
CBM D9090, 7.5 mg. Hard Disk	2250
CBM 2031, 170K Single Drive (New)	295
DC Hayes Smart Modem	220

BUSINESS SOFTWARE-8032

WordPro 4+ or 5+	$ 309
InfoPro	219
Administrator	489
VisiCalc (expanded)	199
BPI A/R, G/L, Job Cost, Inventory, Payroll	ea.325

MasterCard, Visa, Money Order, Bank Check

COD (add $5) accepted
Add 3% surcharge for credit cards
In stock items shipped within 48 hours.
F.O.B. Dallas, Texas (Texas Res. add 5% tax)
All products shipped with manufacturer's warranty.
Prices are subject to change without notice.

TO ORDER
CALL TOLL FREE
800-527-4893
800-442-1048
(Within Texas)
Business Hours
Mon.- Fri. 8 to 6, Sat. 10-2
Write for free catalog.

SOFTWARE OF THE MONTH

Mirage Concepts
Machine Language Data Base
2000 Characters PL Record
200 Fields Per Record
Multiple Files Per Disk

PRODUCT OF THE MONTH

INTERPOD (Intelligent IEEE RS232, serial interface for VIC or C64) ..... $ 179

SJB DISTRIBUTORS INC.
10520 Plano Road, Suite 206
Dallas, Texas 75238
(214) 343-1328

CIRCLE 230 ON READER SERVICE CARD

Improve Your Business' Future.

"I see the future of Software is... Solid.™"

PICK SOLID SOFTWARE'S TESTED BUSINESS PROGRAMS.

Only Solid Software™ offers 12 specific programs for business. Commercial Property Management • Commercial Property Analysis • Medical Data Management • CPA Multi-client Write-up System • Contractors Job Costing • Sales Order Entry/Accounts Receivable/Inventory Mail List • Personnel Agency Search System • General Ledger • Accounts Receivable • Accounts Payable • Payroll

When you're picking your business software, choose the ones that mean business. Solid Software. Offering everything from specific applications for specific businesses to a complete line of general accounting software.

No matter which you select, every Solid Software package is designed for easy understanding. And accompanied by high quality documentation. Yet each package contains comprehensive features typically found only in custom-made programs. And all Solid Software packages are totally integrable with each other. Plus they're all user-proven and backed by a warranty so strong, we'll pay you $50.00 if you can find even one bug.*

Best of all, Solid Software programs are available today. From 200 authorized dealers coast to coast.

Your business will profit more with programs that work specifically for you. From Solid Software. All programs available in MS-DOS™ and CP/M® operating system formats. See your dealer for a free demonstration. If he doesn't carry Solid Software, call us toll-free 1-800-554-4078 for the authorized dealer nearest you. In Georgia, call collect, 404-952-7709

*See your dealer for details. MS-DOS is a trademark of Microsoft, Inc. CP/M is a registered trademark of Digital Research, Inc.

The future of Software is Solid.™

Solid Software™

5500 INTERSTATE NORTH PARKWAY, SUITE 501, ATLANTA, GA 30328, 404/952-7709

CIRCLE 242 ON READER SERVICE CARD

the KCW project has been completed, although one team member said, "If we go federal, I have no idea [how long the project team will continue]."

The Package

Apple is offering a free Apple IIe system to every eligible elementary and secondary school in California. The package includes a 64K Apple IIe computer, a display monitor, one floppy disk drive, and a copy of Apple Logo, a computer language designed for students. The current suggested retail value of the package is $2364. The KCW package also contains coupons for free and discounted educational software from more than 25 educational software publishers, including The Learning Company, Hayden Electronic Publishing, and Sterling Swift.

If all 9250 eligible California schools accept Apple's offer, the total retail value of the donated products will exceed $21 million. Apple projects that the gross cost of the program will be over $5.2 million. But here is where the tax credits make a significant difference.

It is estimated that the California tax credit will be $4 million. (This is less than 25% of $21 million because the net retail price is lower due to dealer discounts.) Thus the net cost of donating $21 million in product is about $1 million, a 95% reduction factor!

Apple is taking pains to ensure that the program runs as smoothly as possible. On May 11, 1983, they mailed an information kit explaining the KCW program to every school and school district in California. As of this writing, they have received positive responses from nearly all of the schools contacted.

Dealer Participation

Apple has contacted their roughly 170 dealers in California and offered them an incentive to conduct orientation sessions for school personnel. For every school session held, the dealer will receive an orientation certificate filled in by the school. Apple will give the dealer an Apple IIe for every 50 orientation certificates he obtains.

Eighty five percent of the dealers went along with the program. Participating dealers will set up an Apple IIe system on their premises (I imagine most have them set up already) on which school representatives may practice, and dealers will assist in explaining how to handle disks, how to operate the keyboard, and how to use Apple Logo. Apple is providing each dealer with two video tapes: one, designed for display to school personnel, explains the use of the Apple IIe; the second instructs dealers on the KCW program.

The motivation of the participating Apple dealers seems to be a combination of good business sense and an attempt to be good citizens of their communities. When asked why he was participating in the program, one large San Francisco dealer said, "Anything we can do to acquaint users with our equipment is bound to increase sales. There is no guarantee of any financial reward, but anyone with any sense can see it has got to be a positive factor."

A Marin County dealer said, "Sure, it'll take some of our time. But we're doing it basically to help the schools along. Many Marin schools now have computers, but a few of the poorer ones don't. Besides, the more educated people are about computers, the more they will come back to us."

An Apple dealer in Walnut Creek said, "We don't get any fee, but the 'door prize' figures out to about $2 per hour for the time we spent. But regardless, we don't mind doing it. It's part of our obligation to the community, although we are also looking for the PR."

Many of the schools that will receive a free Apple system already have one or more computers. Incredibly, neither state officials or Apple personnel know how many computers are now installed in California schools. Steve Scheier said that for some schools, this will be their tenth (or more) computer; for many others, it will be their first.

What good does one computer per school do?

Peer Tutoring

Skeptics have raised the question: "What good does one computer per school do?" One dramatic answer to this question lies in the work of Interactive Sciences, Inc., of Palo Alto, CA, a nonprofit organization with whom Apple is working. Interactive Sciences is currently testing a method they call Peer Tutoring in a Palo Alto middle school (junior high school). Believe it or not, Peer Tutoring allows a single computer to make the entire student body of an average school computer literate during a single school year or less. In Peer Tutoring, each student teaches two others what he has learned. Interactive Sciences has discovered that an entire semester course is not needed to instruct students in how to use and program a computer. Instead of a conventional computer class, a "pull-out" system is used. Students come out of class one hour per week for eight to ten weeks to learn computer programming. Then they tutor two other students for a second eight to ten week period.

Jeff Levinsky, Director of Research for Interactive Sciences, cites numerous advantages to Peer Tutoring, including:

- The direct learning is far more interesting than if done using a text book or conducted in a class with many students.
- The method of learning is faster because there is always someone there to help.
- The students learn even more fully because after they have taken their instruction, they tutor other students. Thus, students learn by teaching.
- The program overcomes the serious

COMING SOON TO VIC-20 AND COLECO

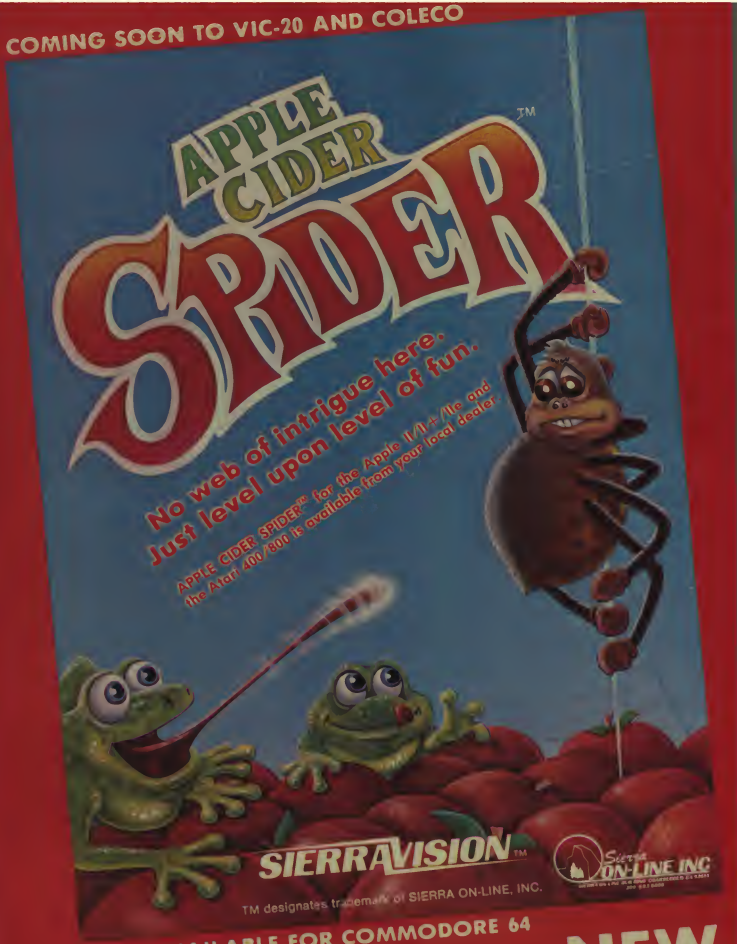
APPLE CIDER SPIDER™
No web of intrigue here.
Just level upon level of fun.
APPLE CIDER SPIDER™ for the Apple II/II+/IIe and the Atari 400/800 is available from your local dealer.
SIERRAVISION™
Sierra ON-LINE INC

TM designates trademark of SIERRA ON-LINE, INC.

NOW AVAILABLE FOR COMMODORE 64

CIRCLE 226 ON READER SERVICE CARD

NEW

problem in getting girls interested in computers. With Peer Tutoring, there is a social, interactive situation in which girls are taught by other girls.

• Three students use a single computer at one time.

Jeff estimates that with just one computer, assuming three youngsters per session, six days per week, seven time slots per day, well over 100 students can be exposed to the computer each week. Because the students at the test school have been so enthusiastic about the program, the computers are usually used during evenings and on weekends as well. The program was put on a volunteer basis, yet 90% of the test school students chose to participate.

The Peer Tutoring test has resulted in some students instructing teachers in how to use the computer and, in some cases, teaching their parents as well. The foundation also works with a senior citizen center; one graduate of this program is 93 years old.

Interactive Sciences is preparing a brochure explaining Peer Tutoring. They are also putting together a one-hour lesson, in the form of an eight-page pamphlet, which describes Peer Tutoring and gives directions to the tutor.

Jeff welcomes inquiries from educators and others interested in the program. Write to: Jeff Levinsky, Director of Research, Interactive Sciences, Inc., 1010 Harriet St., Palo Alto, CA 94301, or call (415) 856-1954.

Teacher Education

The push for computer literacy is being stimulated by the State of California as well. In January, 1983, the state set up 15 Teacher Education and Computer Centers (TECCs) around the state. Their purpose is to provide teachers with training in mathematics and computer science. As part of the KCW project, Apple is providing five free Apple IIe systems to each TECC. William Honig, the recently elected State Superintendent of Public Instruction, is pushing for legislation which will require all students to pass a computer literacy test as a requirement for graduation from high school.

The Apple Logo provided with the KCW package comes on two disks. Apple representatives stress that this is not merely a simple elementary school student programming language with simplistic turtle graphics. They claim it is a language that teaches students up through high school level how to program.

What Others Are Doing

Apple and other computer companies are working with Washington legislators to establish similar tax breaks nationally. The American Electronic Association (whose members include Apple, IBM, Tandy Corporation and a host of other computer manufacturers) has worked toward getting Senate Bills 1194 and 1195 introduced during 1983. These bills provide for deductions beyond the cost of donated equipment, up to a maximum of 200% of the cost of the equipment.

You may well wonder, as did I, if the California and U.S. bills in combination might mean an actual profit to computer donors because of duplicate tax benefits.

Other computer companies are taking advantage of the new California law as well.

An Apple lawyer commented, "I doubt if federal legislation would allow a profit on the deal. But right now, it is hazy what overlap, if any, will occur."

Other computer companies are taking advantage of the new California law as well. Early this year, Hewlett-Packard announced a pilot program in which computer equipment is being donated to 14 California high schools. In a different approach from Apple, each school will be given enough equipment to fully supply one classroom. The package includes ten HP-86 personal computers, ten monitors, ten printers, two graphics plotters, twelve disk drives, and a selection of educational software. One Hewlett-Packard person is assigned on an "on-call" basis to work with each school. The value of the donation is $51,000 per school, for a total corporate gift of $714,000.

Hewlett-Packard plans to conduct an evaluation conference with participating educators to assess the efficacy of the program. Then they will determine what future educational donations or programs, if any, should be established.

IBM announced a program in late March. They are donating 1500 IBM Personal Computer systems to schools in New York, California, and Florida. Eighty-six high schools and 12 teacher training facilities will receive IBM systems. The three states were selected because IBM has major facilities in each of them. Only the California donations are subject to a special tax credit; in New York and Florida, only the standard tax deductions are expected to apply.

The gift to each school includes a 128K IBM PC, a color monitor, two disk drives, a printer, and a selection of IBM software, including DOS 2.0 and Pascal 2.0. The retail value of each system is about $4800. In addition, each school will be given a $10,000 cash grant to help in setting up the program. The total value of the donations is approximately $8 million.

The Future

Up until now, I must admit to having been skeptical over the widespread futuristic talk about how all the kids in the country will soon know how to use computers. However, I am rapidly getting the feeling that most young America will be computer literate before too long, particularly if:

• The so-called Apple Bill is passed in Washington.

• Most states follow Honig's lead in requiring computer skills to graduate from high school, and

• Schools across the nation start using programs like Peer Tutoring.

The future may be coming much faster than we think! □

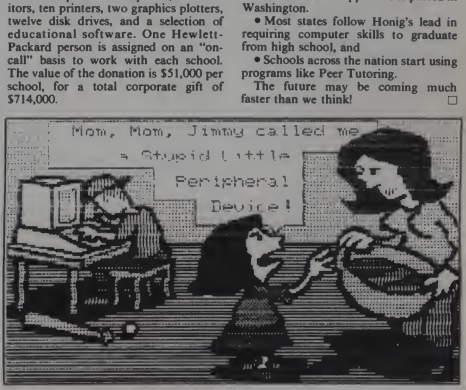

ALL MINI DISKS COME ERROR FREE.

THE HARD PART IS MAKING SURE THEY STAY THAT WAY.

A disk is built with certain safeguards. That's why most disk makers offer guarantees that the product you receive comes to you error free.

We at Memtek Products are concerned that the minidisk remains error free. *Every* time you use it. After exposure to dust, cigarette smoke, fingerprints, even wear caused by your computer. And so, we have built safeguards around the disk, as well.

Memtek Products' latest innovation... acknowledgment of a real world beyond the laboratory.

The hub ring. Designed to prevent our minidisks from jamming in your machine. Rigid. Durable. Reinforced.

The coating. A critically-controlled coating of high-energy magnetic oxide particles that covers the disk's surface, which is then micro-polished to improve head to disk contact, preventing dropouts, lowering head abrasion.

The lubrication system. A constant lubricant protects both the disk surface and the drive head from wear.

The sleeve. Comes with a soft liner that protects the disk while gently cleaning the surface.

The guarantee. We'll replace, free, any minidisk if it fails to accurately store and retrieve data due to a defect in materials or workmanship for up to 5 years from date of purchase. Simply mail the disk back.

The Memtek lineup. Premium, double and quad density minidisks as well as 10- and 15-minute computer cassettes and a 5¼" disk drive head cleaner.

WE PLAY FOR KEEPS™

What is really happening in schools? Here are some results of a recent study.

School Uses of Microcomputers

David H. Ahl

The Center for Social Organization of Schools at The Johns Hopkins University has been conducting a study, the National Survey of School Uses of Microcomputers. Two reports have been issued to date, one in April 1983 and the second in June. Some of the findings are quite intriguing and contrary to what many people think is happening in schools.

Rather than presenting all of the results of the studies here, we will summarize a few results and present highlights of others. Because more secondary schools have computers than elementary schools, and because they have more of them the overall picture of how schools use computers is affected strongly by their use in secondary schools. Later reports will describe use in high schools, middle schools, and elementary schools separately.

In about half of the schools with computers, only one or two teachers, at most, are regular users. Where more than one or two teachers are involved it is most often by using packaged learning games or drill-and-practice programs. However, since elementary students use the computer for drill and learning games, on average, less than 15 minutes per week, they do not have sufficient time for any appreciable skill building to take place. Thus the effect of using drill-and-practice programs is really to acquaint the students with the computer (literacy), and not truly for subject matter learning, no matter what the teachers might think.

15K MEMBERS AND GROWING

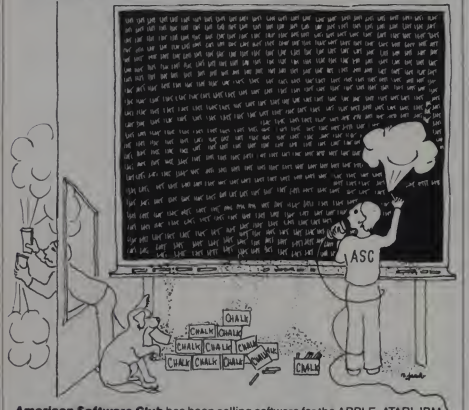

American Software Club has been selling software for the APPLE, ATARI, IBM, TRS-80 and CP/M Computers (DEC, Eagle, Vector 4, Northstar, Xerox 820, Superbrain, Heath/Zenith, NEC, Televideo, Altos, Columbia, Osborne, Sanyo) since 1981. Computerists don't just *join* ASC—they *stay* with us.

Chalk it up to. . .
Having 600 products in stock and our "lowest price" guarantee.
Chalk it up to. . .
Our free bi-monthly Compendium magazine which gives comprehensive product descriptions, club news, and services.
Chalk it up to. . .
Our toll free technical support and order lines. ASC doesn't just *sell* software—we *support* it!
Chalk it up to. . .
Speedy shipping. Because we know waiting can be frustrating, ASC has been shipping more than 60% of orders in under 6 hours.

But don't just take our word for it. Join now, and take advantage of our *free* one year membership offer. With absolutely no purchase obligation, you have nothing to lose and everything to gain.

Wondering if there are strings attached? The only one is in the cartoon. . .

For a One-Year Trial Membership with no fee or obligation, fill out the coupon or call our Toll Free Number:

1-800-431-2061

(NY Residents call 914-762-5644)



American Software Club, Inc.
Millwood, New York 10546

Please begin my free one-year trial membership as outlined above.

Name _____

Address _____

City/State/Zip _____

Outside the US Please enclose $15.00 (US) for a one year membership

My computer is:
- ☐ APPLE
- ☐ ATARI
- ☐ IBM PC
- ☐ TRS-80 (Mods 1, 2, 3, 4)
- ☐ CP/M (8" or 5¼")

CIRCLE 110 ON READER SERVICE CARD

School Uses, continued...

In the schools with computers, about one student in seven actually uses it during any given week. However, in a third of the elementary schools about 40% of the students have had some contact with the computer whereas this is true for only one out of every eight secondary schools.

Schools vary a great deal in how much their computers are in use. On average, computers are used by students for two to three hours per day. However, some schools use their computers less than that; over 20% of the schools use their computers less than one hour per day. In the heavy-using 20%, computers are in use for more than five hours per day.

Given this rather low usage, it should not be surprising to learn that the average elementary student gets less than 25 minutes of computer use per week and that one third of the students get less than 15 minutes per week.

Because secondary schools have more computers on average, have fewer users, and use their computers for more hours per week, the average secondary school student gets more than 45 minutes per week on the machine. Thus, secondary students have about twice as much access time per week than their elementary counterparts.

Schools with more computer resources can do two things with their relative surplus: extend access to more users or give each user more time. Elementary and secondary schools display dramatically different tendencies in this regard.

Elementary schools with more computers do not give more time to student users; they extend usage to a larger number of students. On the other hand, as secondary schools get more computers, they give longer access to the same number of students.

Elementary school usage is divided among computer literacy and writing programs (19 minutes per week), drills and remedial work (13 minutes) and learning games (12 minutes). Because of the small amount of time per user, all of these uses can probably be regarded as different flavors of computer literacy.

In secondary schools, far more time is spent in writing programs (55 minutes per week) and less on drills and remedial work (17 minutes) and learning games (11 minutes). Although relatively rare, students who use computers for word processing, in the business curriculum, or for science laboratory work tend to get large blocks of time. Typically, they get 30 minutes per week, and a third of such students get an hour or more per week.

Further information and newsletters about the project are available from Dr. Henry Jay Becker, Project Director, Center for Social Organization of Schools, The Johns Hopkins University, 3505 N. Charles St., Baltimore, MD 21218. □

How to make your Apple run 3½ times faster.

Just plug in the Accelerator II® and watch your Apple® II or II Plus take off.

Imagine running VisiCalc,® DB Master,® Applesoft, Apple Fortran or Pascal without long delays. With the Titan Accelerator II, your Apple II or II Plus runs these programs a true 3½ times faster. The Accelerator II also runs your Franklin, Basis and other Apple II compatibles 3½ times faster. This faster computer response time means less waiting for you and an increase in your productivity.

This Titan exclusive has its own fast 6502 processor, 64K of high-speed memory, and built-in fast language card. It is transparent to your software and is hardware compatible with most standard peripherals. And you can turn if off from the keyboard to run your Apple at regular speed.

Find out how to run faster and increase your productivity without breathing hard. For information on the Accelerator II and other Titan microcomputer products, see your computer dealer or contact: Titan Technologies, Inc., P.O. Box 8050, 3990 Varsity Dr., Ann Arbor, MI 48107, Telephone (313) 973-8422.

Titan
TECHNOLOGIES, INC.
FORMERLY SATURN SYSTEMS OF MICHIGAN

Attention dealers. Ask us about our special demonstrator unit offer.

Sales and marketing by The MARKETING RESOURCE GROUP, Costa Mesa, CA.

Apple is a registered trademark of Apple Computer, Inc. VisiCalc is a registered trademark of VisiCorp, Inc. DB Master is a registered trademark of Stoneware, Inc

CIRCLE 222 ON READER SERVICE CARD

The Third Annual International Computer Problem Solving Contest Results

Donald T. Piele

When the bulk of this year's returns for the Third Annual International Computer Problem Solving Contest arrived at the University of Wisconsin—Parkside, the mailroom clerk scratched her head and wondered, "Why are people from all over the United States and several foreign countries sending letters and packages to a mathematics teacher here? More than 100 pieces have arrived today alone!"

We began to wonder what we had gotten ourselves into. Opening each return, scanning the results sheet, and reading the comments enclosed took two hours a day. The stack of program listings and sample runs from teams who reported solving four or five problems correctly was steadily growing—especially in the Elementary Division. All of this occurred, of course, as final exams at the University began; grades were due soon in the registrar's office. Our work for the next two weeks was cut out for us.

One week after the deadline for returning the results, we began to grade the solutions. We spent several days reviewing sample runs and reading program listings. All solutions to a particular problem were compared, and an extra 1-5 points were awarded for ease of reading and simplicity of design. In a few cases, we made comparisons by typing and running the programs. To distinguish between the top two or three results, the programs were compared side by side. Of course, all judgments in style and ease of understanding are subjective and, therefore, difficult—a bit like trying to rank works of art.

Elementary Division

The top ranked team in the Elementary Division was a pair of sixth graders, Ethan Straffin and Brad Perkins from Todd School in Beloit, WI. Ethan and Brad worked together to solve all five programs using an Apple II computer. Their solutions were judged to be the best among the twelve teams who solved all five problems correctly. Kent Weber, the Beloit contest director, reported that Ethan and Brad finished the problems in 52 minutes. Aside from the two-hour time limit, the time it takes to solve the problems is not considered in grading the solutions, but it was interesting to know how quickly this pair worked.

This was the first year that a team from Wisconsin had placed number one in any division of the contest. Since Beloit is only an hour's drive from the University, I presented the trophy myself at a special session of the school board to honor outstanding achievements by students in the Beloit School District. After the awards ceremony, I chatted with both young men.

Elementary Division winners Brad Perkins and Ethan Straffin.

The first thing that Ethan, the team captain, wanted to know was where we had taken points off from their programs. I couldn't answer that because awarding points for design and style is a subjective judgment for all the top teams who solve a particular program. We then talked about what he likes to do with his computer. Ethan, who recently upgraded his equipment from a Vic 20 to a Commodore 64, was working on a Monopoly simulation program with graphics displays of the playing board, rolling of the dice, and detailed overlays of properties when a player lands on them.

Although Brad Perkins, the other half of the winning team, does not have his own computer, he can use the "Apple Orchard"—32 Apple computers in a central facility in Beloit for teaching computer literacy to 2000 children in grades 3 to 6. After school, Brad and other computer club members can use the computers. Brad also likes to write programs that use graphics.

Twelve elementary teams solved all five problems, and among

Donald T. Piele, University of Wisconsin-Parkside, Box 2000, Kenosha, WI 53141.

PROFESSIONAL BUSINESS SOFTWARE SALE!

COMMODORE 64

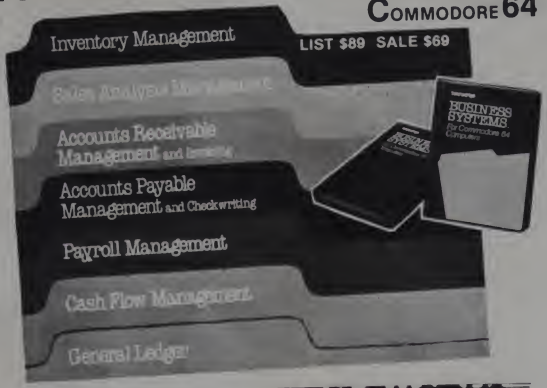

Executive Quality by TIMEWORKS
"Cadillac of Business Programs"

Each Program comes in a beautiful case and includes: *Disk*

- A Menu-driven program, sophisticated enough to provide complete Management and Product information, yet requires no prior computer or accounting knowledge to operate.
- A Manual written in easy-to-understand, people-friendly English, abundantly illustrated to provide further clarity and eliminate guesswork.
- A unique method of creating your own, unlimited array of reports—easily and quickly. YOU select the information you want, and YOU determine the sequence of the report column headings.
- Password Protection, to prevent unauthorized access to confidential data.
- A program which can be used by itself (stand-alone), or can be interfaced, one at a time, with other TIMEWORKS MANAGEMENT INFORMATION programs into a fully integrated accounting system.

PLUS: THESE PROFESSIONAL BUSINESS PROGRAMS -

- ***Script 64 - No. 1 Executive Word Processor - Disk*** ***List $99 - Sale $59***
- ***Complete Data Base - Tape-Disk*** ***List $89 - Sale $59***
- ***Electronic Spread Sheet (like Visicalc) - Tape-Disk*** ***List $89 - Sale $59***

• LOWEST PRICES • 15 DAY FREE TRIAL • 90 DAY FREE REPLACEMENT WARRANTY
• BEST SERVICE IN U.S.A. • ONE DAY EXPRESS MAIL • OVER 500 PROGRAMS • FREE CATALOGS

Add $3.00 for postage. Add $6.00 for CANADA, PUERTO RICO, HAWAII orders. WE DO NOT EXPORT TO OTHER COUNTRIES.

Enclose Cashiers Check, Money Order or Personal Check. Allow 14 days for delivery, 2 to 7 days for phone orders, 1 day express mail! Canada orders must be in U.S. dollars. We accept Visa and MasterCard.

PROTECTO
ENTERPRIZES (WE LOVE OUR CUSTOMERS)
BOX 550, BARRINGTON, ILLINOIS 60010
Phone 312/382-5244 to order

CIRCLE 209 ON READER SERVICE CARD

the top ten teams the difference between the final score was only 6 points. A complete list of the top ten teams appears in Figure 1.

Figure 1. Elementary Division Winners.

Place	Team	School/City
1	Ethan Straffin Brad Perkins	Todd School Beloit, WI
2	Nir Ofer Julie Kerr	Lake Heights School Medina School Bellevue, WA
3	Paul Franklin Mike Parr Brian Workman	Jackson School Morgan Hill, CA
4	Tim Kokesh	Hoover School Bartlesville, OK
5	Andrew Mauer Chris Tuttle Doug Bruha	McKinley School Racine, WI
6	Mike Henry	Tudor School Anchorage, AK
7	Jim Cogbill Jennifer Ledbetter Karina Walters	Chaffin School Ft. Smith, AR
8	Leslie Gibson David Morris	Brian School Willowdale, Ontario, Canada
9	Jason Hagen Ethan Marin	Park Road School Pittsford, NY
10	Kevin Lee John Wolcott	Morley School Lincoln, NE

Junior Division

The first place team in the Junior Division consisted of one competitor, Robert T. Adams, a ninth grader from Woodson High School in Fairfax, VA. Robert and three other teams solved four problems correctly, but his well-constructed and efficient programs put him in the top spot.

During the past year Robert competed in several mathematical contests: the Virginia Mathematics League, Washington Metropolitan Competition, and Atlantic Regional Competition. He likes soccer, football, English, computers, and his mathematics and computer science coach, Andre Samson. "Mr. Samson gives us problems that really make us think," said Robert.

Figure 2. Junior Division Winners.

Place	Team	School/City
1	Robert T. Adams	Woodson High School Fairfax, VA
2	Paul Warshawsky Misha Glouberman	Wagar High School Cote St. Luc Quebec, Canada
3	Tim Patton Rania Huntington Dan Upper	Wisconsin Heights High School Mazomanie, WI
4	Jody McCord	Victoria High School Victoria, TX

The problems for the Junior Division were apparently too difficult this year. We did not receive enough returns with four or more problems solved correctly to be able to rank beyond the top four teams. The top four teams that correctly solved four problems appear in Figure 2.

Senior Division

The Senior Division winner this year also entered as a one-person team: John Rompel from Piedmont High School, Piedmont, CA. John is the first contestant to have his name engraved on two winning trophies; he won the Junior Division title in 1981, the first year of the contest.

Both John and the second place team solved all five problems—an outstanding accomplishment given the difficulty of the last problem. He said it helped that he had worked on a similar eight queens problem before. His solutions were very elegant, well-documented, and easy to read. John, who has a Radio Shack lookalike at home, has been programming professionally for four years for a large software and consulting firm. He loves to work with different operating systems, and he programs in most low and high level languages, including Pascal, C, Fortran, and assembly for the Z-80, 6502, and 8086. A junior this year, John plans to skip his senior year to enter the University of California at Berkeley in the fall, majoring in computer science. A complete list of the top nine teams appears in Figure 3.

Figure 3. Senior Division Winners.

Place	Team	School/City
1	John Rompel	Piedmont High School Piedmont, CA
2	John Gravely David McKinnis David Tilley	Jordan High School Durham, NC
3	Rushika Fernandopulle Phil Koh	Gilman School Baltimore, MD
3	Charles Goricanec Glen Lalonde	Don Bosco High School Toronto, Canada
4	Spencer Greene Truman Joe	Klein High School Spring, TX
4	Tom Kreyl Tom While Mark Braun	Livonia High School Livonia, NY
4	Brian Kelley John Slaughter	Winfield High School Winfield, WV
4	John Abbott Mike Henry Jeff Pelletier	Mona Shores High School Muskegon, MI
4	Michael Silver John Mellor	Highland High School Bakersfield, CA

Statistics

Each contest director was asked to return the results form from his local contest. The form, which summarizes the local results,

COMPUTERS: A RENAISSANCE IN CREATIVITY.

During each age of man, the discovery of new technology has given artists greater freedom to create. Moveable type and printing presses gave birth to the novel, the photographic process ushered in motion pictures. Now, computers are allowing artistic spirits to soar as never before. Artists are creating new visions, musicians are creating new sounds, writers are turning their thoughts into text almost as fast as they can think them. All through computers. **Genesis II–Creation and Recreation with Computers,** by Dale Peterson, thoroughly explores the computer revolution and how artists are turning it into a creative revolution. It's the kind of reading that can help free the artist in any computer owner's soul. And it's only from Reston.

Reston Publishing Company
A Prentice-Hall Company
11480 Sunset Hills Rd. Reston, VA 22090
Available at your local bookstore and computer retailer or call us at (800) 336-0338.

CIRCLE 229 ON READER SERVICE CARD

Thinking about a 1200 Baud Phone Modem?

WAIT!

You need time.

And PRO-MODEM 1200 has it. A Real Time Clock/Calendar combined with an intelligent full 212A 300/1200 baud telephone modem. Plus the capability to expand into a full telecommunications system. Much more than just a phone modem.

When you re on-line, time is money. PRO-MODEM helps you save By monitoring the duration and cost of your phone calls. By sending and receiving messages at preset times when the rates are lower. Unattended. With or without your computer.

Compare the $495 PRO-MODEM 1200 with any other modem on the market. For example, you'd have to buy both the Hayes Smartmodem 1200 plus their Chronograph for about $950 to get a modem with time base.

And PRO-MODEM 1200 does more. It lets you build a full telecommunications system with features like Rep Dialer, Incoming and Outgoing Message Buffering, Mailing List, Help Mode, Programmable Operating Instructions, a 12-Character Alpha-Numeric Time and Message Display, and easy to use PRO-COM Software.

There isn't space to describe it all here. See your local dealer for complete details now. It'll be well worth your time. And money.

Prometheus Products, Inc.,
45277 Fremont Blvd.,
Fremont, CA 94538,
(415) 490-2370

Pro-Modem 1200 from PROMETHEUS

CIRCLE 207 ON READER SERVICE CARD

helps us evaluate the difficulty of the problems. We used these returns to compile the overall average results (Table 1).

Table 1. Average Results.

	Elementary	Junior	Senior
Number of teams.	5	4	7
Average Score	25	13	21
Average number of problems solved	1.5	.7	1
High Score	72	33	53
Highest number of problems solved	3.9	1.7	2.8
Solutions to #1	3.6	1.2	3.8
Solutions to #2	1.3	.9	2
Solutions to #3	1.8	.4	1
Solutions to #4	1.7	.9	2.7
Solutions to #5	1	0	.2

As the statistics confirm, the junior division problems were much too difficult this year. Last year, the junior division problems were too easy, so we increased their difficulty. Apparently our adjustment went too far. The senior division problems were just slightly too hard. Had we started out with a simpler first problem, we could have avoided this; we learn something every year.

Feedback

The comments that we received this year were very informative and useful. In general, directors of contests with stronger and more experienced teams didn't mind the difficulty of the problems as much as those who were new to the contest. Junior division teams were especially hard hit, and some directors thought that there was not enough difference between the junior and senior levels. Many people believed that we should have at least one elementary problem—a confidence builder—that most entrants could solve.

The next major concern was the wording of some problems. Problem #2—De Bug was not stated as clearly as it should have been. A less-than sign was missing in the problem, which caused the output of some teams to look different than our sample runs.



"This computer football game is really realistic. The players even go on strike!"

It was easy to think of the output in a slightly different way too. Most judges understood the problems here and accepted the different output.

A few judges complained about the difficulties of grading a simulation problem. The problem is that one can't be sure the program is correct by looking at the sample run because the runs are all different. Finally, some directors thought that senior problem #3, Factorial Power, was too tricky. It asked the student to compute the right-most non-zero digit in the decimal representation of N! without actually computing all the digits in N!. Many very good students kept only one significant digit in their computations, which proved to be insufficient. Two teams pointed out afterward that even our sample solution, which kept two significant digits at each step, would not work for all numbers between 1 and 500. Our solution gave the correct results for the test numbers required in the problem, but failed for a few numbers between 1 and 500 that we did not try. It was noted that it is necessary to keep three significant digits at each step to solve the problem correctly. We out-tricked ourselves on this one.

Recommendations

The response to the contest this year was tremendous. It is very satisfying to know that people find our contest interesting and useful in their computer program, but a little scary. We thought we were just having a little fun with computer problem solving challenges, and now we get calls from organizations that are planning to sponsor a statewide contest for thousands of students! We estimate that at this year's 465 contest sites worldwide, about 10,000 students participated in our contest.

Consequently, we think that we must try to improve the contest for all the students involved while keeping our emphasis on problem solving. In addition to trying to eliminate tricky problems and making the problems easier to read, we are considering a few improvements for next year:

- Make two problems very simple to ensure that more teams solve at least one problem correctly.
- Keep two problems at the intermediate level.
- Keep the fifth and final problem difficult so that only the very best teams are able to solve it.
- Provide an algorithm to generate random numbers for all simulation problems so that correct sample runs give expected results. This will make them easier to judge.
- Establish the last Saturday in April as the official date of each year's contest. The preceding Friday will always be the alternative date for schools that are unable to hold the contest on a Saturday.
- Send registration forms and information in December to all contest directors who participated the previous year and to others who ask to be placed on our mailing list.

Conclusion

Outstanding teams were commended locally, usually in newspaper articles or with a trophy. Because of limited time and resources, we can judge only the very best results from all over the world. The winning international team members have their names engraved on one of three traveling trophies, which they keep for one year. (A trophy was added this year for the elementary division.) Placing in the contest is a significant achievement; we enjoy watching it happen and publicizing the results.

Finally, we wish to thank all the local area contest directors, contest duplicators, judges, and team members for helping to make the contest possible this year. As many contest directors told us, "Wait 'til next year!"

Post Script

Next year's contest will be held on Saturday, April 28, 1984. For those who cannot hold the contest on a Saturday, the alternative date is Friday, April 27. To obtain a registration form, send your name and address to: Donald T. Piele, University of Wisconsin-Parkside, Kenosha, WI 53141. □

PRICE WARS: A TRUE STORY

BY DAVID H. AHL
CARTOONIST B. SCHOCHET



AUG. 15 '82 - LUBBOCK TX.

WELL, REPLACING THE CHICLETS WITH REAL KEYS AND CHANGING THE NUMBER TO 99/4A JUST DIDN'T DO THE TRICK. IT'S TIME TO SHOW THEM US LUBBOCK ARMADILLOS REALLY MEAN BUSINESS.

HOW DO WE DO THAT, BILL?

GIVE 'EM A $100 REBATE. THEN PEOPLE CAN BUY 99/4A'S FOR $199. AT THAT PRICE NOBODY CAN TOUCH US. THEY'LL WALK OFF THE SHELVES

OCT. 4 '82. TANDY, FT WORTH TEXAS

JOHN, THE ANIMALS 'CROSS THE STATE ARE GETTING ORNERY. LET'S LOP SOME OFF THE PRICE OF CoCo.

BUT THEN THE RETAIL PRICE WILL STILL BE $379.

RADIO SHACK

OKAY JON, WE'LL LOWER THE PRICE BY $70.

YEAH, BUT WE'VE GOT MORE STORES THAN ANYBODY

OCT 11. '82, ATARI, SUNNYVILLE CA.

WOCKA, WOCKA, THE TEXANS ARE GETTING RESTLESS, WE GOTTA DO SOMETHING. BOY AM I HUNGRY WOCKA.. WOCKA.

THAT'S THE ANSWER RAY! MORE POWER DOTS, I MEAN MORE MEMORY WE'LL GIVE 'EM 32K FOR THE PRICE OF 16K. WOCKA, WOCKA, GULP.

NOV. 1, '82. TANDY, TX.

JOHN, I JUST FOUND OUT K-MART HAS LOTS OF STORES TOO, AND PEOPLE ARE BUYING COMPUTERS THERE. WE'VE REALLY GOT TO CUT THE PRICE THIS TIME.

BUT THAT'S STILL $399

YEAH, BUT WE GOT A GREAT NAME.

JON, THE STOCKHOLDERS WANT PROFITS NOT COMPUTERS. BUT YOU'VE GOT A POINT - CUT THE PRICE OF 16K BY $100

DEC. 20, '82 - ATARI

THINK OUR 32K MEMORY WAS A HIT OF THE CHRISTMAS BUYING SEASON, WE'VE GOTTA GET WOCKA' SERIOUS.

WOCKA, WOCKA I DON'T

HOW ABOUT SELLING THE COKE-PROOF KEYBOARD ONE FOR $200 AND THE REAL KEYBOARD ONE FOR $500. NOBODY'LL TOUCH US THEN.

I'M STILL HUNGRY WOCKA-WOCKA.

OKAY, WE'LL PUT 48K IN THE 800 TOO.

JAN 10, 83 - COMMODORE C.E.O. JACK TRAMIEL

I THINK IT'S TIME TO MAKE OUR STOCK RISE ANOTHER 50 POINTS.

YES SIR!

ANNOUNCE THAT WE'LL SELL THE 64 IN SUPERMARKETS FOR $400 AND THE TOY FOR $139.

YES SIR!

WHAT?

BUT CAN WE PRODUCE ENOUGH?

FEB. 14, '83. TEXAS INSTRUMENTS

WE'VE GOT TO SQUASH THAT PESKY SEAMAN. LET'S CUT THE DEALERS PRICE BY $48 AND CONTINUE OUR $100 REBATE.

BUT, WHAT ABOUT OUR PROFITS?

PROFITS, SMOFITS. WE'LL MAKE IT UP IN VOLUME.

AND IT'S WORTH EVERY PENNY OF IT.

BUT THAT MEANS THAT YOU CAN BUY A 99/4A FOR $149!

APRIL 4, '83 - COMMODORE C.E.O. J TRAMIEL

TIME FOR ANOTHER STOCK PRICE RISE. YOU JUST CAN'T HAVE ENOUGH OF THOSE.

YES SIR.

CUT THE PRICE ON THE PERIPHERALS FOR THE TOY. SO DEALERS CAN ADVERTISE A VIC FOR UNDER $100.

YES SIR.

APRIL 13, '83, TEXAS INSTRUMENTS

ARE WE GOING TO MATCH THAT LAST PRICE CUT OF THE SEAMAN?

BUT WHAT ABOUT THE 99/2?

NOBODY!

HECK NO, MAYBE IN JUNE.

IF WE CAN SELL THE 99/4A FOR UNDER $100 IN JUNE, WHAT FOOL WOULD PAY $100 FOR A B/W MODEL WITH CHICLET KEYS?

YOU GOT IT. KILL IT!

APRIL 18, '83 ATARI

WOCKA, WOCKA, I'M GETTING REAL HUNGRY FOR SOME PROFITS. HOW'S THE 1200XL DOING THAT WE JUST ANNOUNCED? AND ALL THOSE PRICE CUTS?

BUT I'M HUNGRY FOR WOCKA-WOCKA PROFITS NOW.

WILL THAT HELP PROFITS?

WAIT'LL YOU SEE WHAT WE'RE GOING TO ANNOUNCE AT CES IN JUNE. IT'LL KNOCK YOUR SOCKS OFF.

OKAY, WELL GIVE A $100 REBATE ON EVERYTHING IN THE LINE.

NO, BUT PEOPLE WILL BE ABLE TO BUY A 400 FOR $89 AND THEY'LL LOVE US.

MAY 2, '83 - TIMEX CLOCK + WATCH FACTORY, WATERFORD, CT.

ENOUGH IS ENOUGH, CUT OUT THAT $15 REBATE

PUT 'EM IN CERIAL BOXES, NO, THAT WON'T DO. WE'LL JUST CUT THE PRICE TO $49.

BUT THEN HOW CAN WE SELL THESE TOYS?

MAYBE WE COULD GIVE ONE AWAY WITH THE PURCHASE OF A WATCH.

MAY 3 '83 TANDY

JOHN, PEOPLE DON'T THINK OUR NAME STANDS FOR COMPUTERS.

BUT WE DIDN'T SELL MANY OSCOS.

YEAH, BUT WE MADE PROFITS WHILE EVERY-ONE ELSE WENT DOWN THE TUBES.

OKAY, SLASH THE PRICE TO $199. WE'LL SHOW 'EM.

MAY 23 '83, TEXAS INSTRUMENTS

DO YOU THINK WE CAN AFFORD TO WAIT UNTIL JUNE WITH THAT PRICE CUT?

WITH THIS INVENTORY I THINK WE BETTER SELL 'EM FOR WHATEVER WE CAN GET. WE MIGHT WANT TO GIVE OUR PRODUCTION ARMADILLOS SOME EXTENDED SUMMER VACATIONS TOO.

YOU KNOW, WE MIGHT WANT TO GIVE AWAY EXPANSION BOXES OF BIG AND BULKY.

TOO, THEY'RE KIND

NOT TO MENTION OVERPRICED.

JUNE 5 '83 COLECO

WELL, THE CROWDS SEEM TO LIKE THE ADAM AND FOR $600 FOR COMPUTER, GAME UNIT, TAPE DRIVE AND PRINTER, THE PRICE IS RIGHT.

BUT I THINK WE'LL BE ABLE TO MAKE THEM FOR X'MAS.

HOW COME WE'RE KEEPING THEM BEHIND GLASS DOORS?

BECAUSE IT'S NOT QUITE REAL, ACTUALLY IT'S A HOLOGRAM OF THE DREAM OF THE DESIGNER.

JUNE 5, '83, COLECO, CONTINUED

I'M SURE YOU'RE RIGHT, AFTER ALL IF THOSE ARMADILLOS CAN MAKE A PROFIT SELLING 99/4AS FOR $99 AND GIVING AWAY THE EXPANSION BOX, WE CAN SURE MAKE A PROFIT AT $600 FOR THIS THING.

BOOTH 7

JUNE 10 '83

DAILY NEWSPAPER

TEXAS ARMADILLO INC. POSTS BIGGEST LOSS IN CORRORATE HISTORY!

STOCK PLUMMETS BLAMED ON HOME COMPUTER PROGRAM

TO BE CONTINUED...

JUNE 18 '83, COMMODORE CEO J. TRAMIEL

WELL, CES IS OVER, GUESS IT'S TIME TO BOOST IN OUR STOCK PRICE.

CUT THE DEALER PRICE OF THE 64 TO $200, THAT WILL LET 47TH ST. PHOTO SELL 'EM TO CONSUMERS FOR $199. GOSH I WISH I KNEW HOW THEY DO THAT.

YES SIR.

YES SIR.

SUMMER '83

GOING OUT OF BUSINESS

SCHOCKET

Profile Of The Creative Individual

This article is the second in a two-part series on the creative individual. The first part appeared in the August 1983 issue of Creative Computing.

Eugene Raudsepp

Despite the contemporary trend toward specialization in almost every occupation and profession, there is a growing realization that no specialist can make a significant contribution in his field of endeavor unless he is well versed in many fields beyond his own specialization. Many fields have evolved to such a degree of complexity and difficulty that it takes continuous, unremitting study in many diverse areas to be able to function creatively.

The intellectual baggage a person has accumulated during his educational career becomes obsolete only four to seven years after graduation unless he actively continues his education, according to several studies. In addition, it is estimated that in some technical fields as much as a third of a person's time during the workday must be devoted to keeping up with the ever-increasing arsenal of new knowledge. And this cumulative information deals exclusively with the area of a person's specialty. For creative thinking, however, one needs competence that spans a variety of disciplines. Heedful of this, the creative person makes education and the acquisition of new knowledge a vital part of his career design. His goal is to broaden and deepen his intellect without spreading himself thin or becoming pedantic.

The specialist (especially in technological fields) is frequently noncreative because he is unable to see beyond the accepted narrow area of his particular field of specialization. As William J.J. Gordon, founder of Synectics, Inc., points out, "Many highly trained people naturally tend to think in terms of the dogma of their own technology, and it frightens them to twist their conventions out of phase. Their conventions sometimes constitute a background of knowledge upon which they rely for their emotional stability. Such experts do not want cracks to appear. They identify their psychic order with the cosmic order and any cracks are signs of their orderly cosmos breaking up."

Few transcend their subjugation to the traditional and jump beyond the orthodox to original viewpoints and approaches.

The narrow specialist frequently thinks he knows it all and takes inordinate pride in his expertise. When confronted with ideas or approaches that are somewhat unorthodox, he feels compelled to prove, often with convincing logic, that they just wouldn't work. The creative person, with a more open mind and global grasp of things, will often not accept or believe the arguments that the expert advances. He goes ahead, develops his own method of approach, and is frequently successful with problems considered by the expert to be insoluble.

Perhaps the chief danger of specialization, however, is that it emphasizes and demands strict conformity to the accepted dogmas and conventions of a field. Learning to comply with the established dogmas starts early in a person's educational career. By the time he is ready to graduate into original production, he frequently finds that he cannot free himself from its bondage.

Relatively few individuals find the courage to tackle new problems in a new, unconventional manner; only a few transcend their subjugation to the traditional and jump beyond the orthodox to original viewpoints and approaches. The renowned physicist and father of operationalism, P.W. Bridgman, advises that the most important thing for the creative person to remember is merely "to do his utmost with his mind, no holds barred."

This is not to deny the value of mastering the traditional methods and canons of a field. Without mastery of the

Eugene Raudsepp, Princeton Creative Research, 10 Nassau St., P.O. Box 122, Princeton, NJ 08540.

That's what you get with the LNW80 Model 2—undoubtedly the most versatile, powerful and fully equipped microcomputer in its class today. A machine so superior in concept and design, that it will define the standards of microcomputer performance for years to come.

VERSATILITY

The LNW80 2 performs wonders with the most complete library of software available to any microcomputer on the market today. Every LNW80 2 comes complete with this outstanding library of Business Software: **LNW SMALL BUSINESS AND PROFESSIONAL ACCOUNTING SERIES**: General Ledger, Accounts Receivable, Accounts Payable, Payroll; **ELECTRIC SPREADSHEET**; **ELECTRIC PENCIL WORDPROCESSOR**; **MICROTERM MODEM PROGRAM**; **CHART EX HIGH RESOLUTION BUSINESS GRAPHICS CHARTING PROGRAM**; **CP/M 2.2**; **DOSPLUS**; **LNW-BASIC**; **MICROSOFT BASIC**. In addition to a comprehensive line of LNW80 2 Software, it is also fully compatible with software from TRS80® (Models 1, 3, 4) CP/M® and Cromemco worlds—a capability which gives you access to the most extensive and mature libraries of business, scientific, engineering and entertainment software applications. So no matter how far you expand into user applications, the LNW80 2 will expand right along with you.

POWER

The LNW80 2 performs miracles with the computing power of 96K RAM (standard) of user memory matched with a mass storage capability which handles 8" floppy disks and 5" hard disk drives. And while the unit comes with built-in controllers for 5" and 8" floppy disks (single double sided, single double density, up to 4.5 Megabytes capacity), the LNW80 2 also gives you the unique ability to read and write diskettes from a greater variety of other popular computers than does any other microcomputer. So regardless of how big you grow, you will never end up with thumb-twiddling down time while you expand to a more powerful system. The LNW80 2 will always have enough muscle to handle your biggest and toughest jobs.

FULLY EQUIPPED

The LNW80 2 was developed to anticipate the needs of both expansion and compatibility. So the computer was designed with enough built-in features to keep you from having to spend a small fortune as you move down the road to higher levels of user sophistication. Standard features include high and low resolution graphics in both color and black-and-white, an asynchronous serial communication channel, and a wide variety of tape, printer, monitor and hardware expansion ports. In addition, the LNW80 2 contains an array of quality construction features that fully justify its remarkable one-year limited warranty.

So if you're looking for a microcomputer that will satisfy your performance needs as you grow and develop, take a long hard look at the LNW80 2. It's the one microcomputer built to meet the challenges of tomorrow—for a long time to come. For more information and the name of the dealer nearest you, write or telephone:

LNW Computers
2620 Walnut, Tustin, California 92680
Telephone: 714/544-5744

STATE-OF-THE-ART ENGINEERING
STATE OF TOMORROW PERFORMANCE.

LNW COMPUTERS

CIRCLE 180 ON READER SERVICE CARD

accumulated knowledge of a field which takes a great deal of study and practice, one's compelling hunches may remain mere flashes in the creative pan. The power of originating ideas without skill and knowledge often prevents their full exploitation. Still, the important point is that one cannot afford to be unduly influenced or enslaved by established knowledge. Creativity is the natural enemy of dogma and conformity.

Creative Memory

The unconscious is a vast storehouse of memories: facts, observations, impressions, ideas, and associations. The creative individual's unconscious is always richly stocked with these, but this in itself does not indicate creative ability. Most of us know people who seem to have all kinds of information and facts at their fingertips, yet have never been able to achieve much in a creative way. Often the reason for this is that their memory functions as a rigidly ordered storage of deposited concepts that precludes a flexible and imaginative use of them.

That a prodigious memory can act as a deterrent to creativity is pointed out by scientist Ralph Gerard: "Memory is a desirable attribute; but it is not worthwhile if, as is often the case, one pays for it by having a nervous system that somehow fixes so easily that it loses pliability and the ability to use facts in reasoning and imagining. The general experience has been that the memory wizards are likely to know everything but are not able to do much with it; they are not creative people. There are, of course, notable exceptions; if you happen to be a memory wizard you may also be creative, but the chances are strongly against it."

Creativity is the natural enemy of dogma and conformity.

What makes memory creative is a state of flux or dynamic mobility in its components. The noncreative memory encapsulates or files its data and impressions neatly into independent groupings, clusterings, and categories, all clearly bounded and demarcated. The creative memory, on the other hand, has permeability in its structural boundaries so that all sorts of related or unrelated

PICK PROOF

"Rocks an Excellent Performer"
—Russ Adams, INFOWORLD

"Locksmith" can't pick it. "Nibbles Away" can't sink its teeth into it.
"Back-It-Up" doesn't. And Clone "won't".

The DISK ENCRYPTION SYSTEM stands firm against every kind of copy theft, memory theft or dump. Interchangeable program elements and variable parameters (including DOS-Ram protect) allow you to customize literally millions of protection systems for every program you write. FASTLOAD feature allows you to load protected disks at 5000 bytes per second ... FAST. Total program security for any Apple® (or Apple® compatible) with 48K Ram, DOS 3-3.

ONLY $60, plus $2 shipping and handling.

THE DISK ENCRYPTION SYSTEM ONLY FROM:

WINNER'S CIRCLE
2420 Parker St., Berkeley, CA 94704
(415) 845-4813

Apple® is a registered trademark of Apple Computers, Inc.

CIRCLE 268 ON READER SERVICE CARD

"There's No Time Wiser Than After Dark."

When you're looking for solid, up-to-the-minute information, the best place to search is BRS/AFTER DARK. The one system designed for serious searchers, AFTER DARK offers you more databases citing more authorities on more subjects than any other popular online information service—at the lowest cost.

For only $6 to $20 per connect hour, including telecommunications charges, you can personally access the same online files used by major reference libraries and corporations worldwide. These files contain the latest information on subjects ranging from business management, mathematics and education to health, psychology, chemistry, family planning, and just about everything in between.

The range of databases available keeps expanding all the time. AFTER DARK now brings you the full text of the **Academic American Encyclopedia**, as well as the **Harvard Business Review.**

CIRCLE 119 ON READER SERVICE CARD

And for microcomputer buffs, there's a new online Software Directory listing major software packages.

AFTER DARK's simple, interactive language and straightforward logic take only minutes to master. The system is outstandingly comprehensive, remarkably fast, and above all, fun to use. All you need is your classified BRS password and any dial-up system. Then, every weekday from six in the evening until the early morning hours—round the clock on weekends and holidays—you can summon up a wealth of valuable information.

Use the coupon to sign up for BRS/AFTER DARK before another evening goes by. Seriously, it's like having your own university library online at home.

BRS COLLEAGUE
AFTER DARK

CC 10/83

☐ Sign me up as a BRS/AFTER DARK subscriber. I understand I will be charged a one-time subscription fee of $50 plus connect hour rates as low as $6 per hour, billed to my credit card account with a monthly minimum charge of $12.

☐ I'd like to know more. Please send me a list of databases and a brochure describing BRS/AFTER DARK.

My profession is _____.

Name _____

Address _____

City _____ State ____ Zip ____

Charge to MASTERCARD/VISA (circle one).

Acct. No. _____

Expires _____

Signature _____

Mail to BRS • 1200 RT. 7 • LATHAM, NY 12110 • (518) 783-1161

(152)

APPLE (DOS 3.3 REQUIRED) 48K DISK $34.95
ATARI 48K DISK $34.95
COMMODORE 64 TAPE & DISK $34.95
TRS-80 CoCo 32K TAPE $34.95

ANOTHER WINNER FROM

Adventure INTERNATIONAL
A DIVISION OF SCOTT ADAMS, INC.

TRIAD — YOU'LL ~~LIKE~~ *love* IT!

CIRCLE 107 ON READER SERVICE CARD

data, impressions, and concepts can be cross-indexed and interassociated. Furthermore, in the creative individual's unconscious an incessant rearranging, pruning, discarding, and refining of ideas occurs. Such a permeably structured and dynamically fluid memory encourages new combinations of ideas to form.

Thinking In Images

Creative people rely heavily on internal visual imagery or "thought-visions," which are, at times, exceptionally clear and vivid; at other times they can be murky and tied to a tumble of vague, meandering thoughts. Whether clear or cloudy, imagery often contains the kernel of an original idea.

It was an image analogy that started atomic physics. To find an explanation for the atomic structure of elements, Niels Bohr used the image of tiny spheres circling in orbits. For insight into the processes within the atom, he used the image picture of a miniature planetary system. Einstein also claimed that he rarely thought in words. Notions came to him in images, and only later did he try to express these in words. And there are many other noted creative individuals who state that first they try to *feel* or couch in *imagery* what they imagine before naming or verbalizing.

Language, of course, can exert a tremendous influence on both the unconscious direction of thinking and on the way thoughts are finally formed and articulated. But this influence can often be harmful because of the readiness of language to name immediately, to label what is perceived internally. Frequently this limits any further development of the incipient ideas.

Most people are impatient with the vagueness and incoherency of ideas during the beginning stages of the creative process. They feel immediately compelled to force them into the familiar mold of existing frameworks or into language and concepts that invariably fail to do justice to the singular qualities of the perceived novelty. The attempt to crystallize the initially dim or vague creative idea, the eagerness with which most people attempt to snatch it from the void, so to speak, forces on the idea a premature closure that prevents the full range of novelty from finding expression.

The more complicated and difficult a question is, the more we should distrust words.

The precision forced on images and complex thoughts through premature articulation is also fraught with the danger of altering them. The renowned mathematician Jacques Hadamaard states: "I feel some uneasiness when I see that Locke and similarly John Stuart Mill considered the use of words necessary whenever complex ideas are implied. I think, on the contrary, and so will a majority of creative people, that the more complicated and difficult a question is, the more we should distrust words, the more we should feel we must control that dangerous ally and its sometimes treacherous precision."

Philosopher F.S.C. Northrop states that "If one wants to get pure facts, he must go not to physicists or to chemists or to engineers, but to impressionistic painters. They give us the pure qualities, just the impressions, not the objects we infer from them. . . . The person in our society today who shows us what is directly observed is the impressionistic painter. He just paints this field of immediacy with the sensuous qualities and says, 'Now just stop with those and enjoy them.' I believe that one of the greatest sources of creativity is to be found in being pulled back by the modern, Western impressionistic painters to that which is sensed immediately. Only thus are we broken loose from our older inferred theories and enabled to start over again."

What Northrop means is that one should sense what one perceives before articulating it, before making it conceptual or symbolic, or simply, before trying to *understand* it intellectually. In this essentially feeling-sensorial fashion, we can make our perceptions more original and creative. And if we can incorporate observations creatively, then we can also immeasurably increase our capacity to think creatively.

Toying With Ideas

There is often an apparently light side to the creative person's involvement in his work. He tends to become lost in what to an outsider seems irresponsible play with ideas, forms, materials, relationships, concepts, and elements that he shapes into all kinds of incongruous and imaginative combinations. The creative person knows from experience that this seemingly purposeless toying with possibilities strengthens while it loosens his imaginative powers. It is a "letting go" exercise, out of which significant creative ideas often emerge.

Improvisation also serves a very concrete and immediate purpose. It often helps creative individuals to "chance upon" creative solutions to recalcitrant problems that had defied any frontal attack. But most important, playful improvisation and the willingness to view a problem from unusual angles helps capture a mood that facilitates the flow of ideas. Then, one idea will pull out another and, in turn, another, until one idea suddenly commands their full attention because they think that the idea represents something truly novel.

Creative individuals have also learned from past experience that these quasi-serious exercises relax the critical and conservative bent of their consciousness. A light-hearted spirit of play frees them from the habits, conditionings, and conventions that impede the arrival of the new. By putting the judicial censor of their conscious minds to sleep, they can pass over the established order and set the stage for the premiere of fresh ideas and solutions.

Analysis And Synthesis

The creative person is able to analyze

a problem and to perceive the relationships that exist between the parts and the whole. Analysis may seem to be diametrically opposed to creativity, but it is part of the ability to synthesize; prolonged searching and analysis usually precedes creative synthesis. The analysis of a problem and synthesis of elements condition one another and, thus, are complementary aspects of a single process in creative problem solving.

Analysis is necessary because it helps the creative person to break the problem down into manageable elements. To synthesize creatively means to combine or rearrange many elements in a way that results in the formation of a new whole. Thus, the creative person has strong dual abilities, both to abstract the details and particulars and to synthesize or orchestrate a new configuration.

That creative people tend to spend more time in the analytical phases of problem solving than do less creative individuals has been documented by several experiments. For example, psychologist Gary A. Steiner states: "Experiments have indicated that highly

Most people find ambiguity threatening; they choose instead the tried and tested pre-mixed recipes for their cognitive food.

creative individuals often spend more time in the initial stages of problem formulation, in broad scanning of alternatives. Less creative individuals are more apt to 'get on with it.' For example, in problems divisible into analytic and synthetic stages, highs spend more time on the former—in absolute as well as relative terms. As a result, they may leapfrog lows in the later stages of the solution process. Having disposed of more blind alleys, they are able to make more comprehensive integrations."

Researchers S.I. Blatt and M.I. Stein reached a similar conclusion with their experiments: "Our more creative individuals spent more time and asked more questions that were oriented to analyzing the problem. Our less creative individuals, on the other hand, spent more time and asked more questions that were oriented to synthesizing the information they had. Our observations suggest that the more creative men were 'feeling out' the problem, attempting to understand it, to become one with it; and, after they understood what they



were about, they then integrated what they had learned. Consequently, they spent more time analyzing the problem and less time synthesizing the information they had. Our less creative individuals looked as if they were going to wrench the solution from the problem to dominate it; they 'went after' the answer even before they knew the structure of the problem."

Tolerance Of Ambiguity

For many people a significant reason for the lack of ability to produce creative ideas is their strong preference for precise and concrete thoughts. Consequently, they tend to reject prematurely notions and ideas that do not fit into what they already know or that are too intangible or elusive to permit immediate comprehension and categorization. Many people who prefer clarity and effortless understanding experience any vagueness or vague sense of meaning as a scary, uncomfortable, and sometimes even irresponsible state of mind.

Most people find ambiguity threatening; they choose instead the tried and tested pre-mixed recipes for their cognitive food. The clearly defined and familiar enthrall most people because the new threatens to disturb the secure comfort of the familiar.

As William J.J. Gordon explains: "All problems present themselves to the mind as threats of failure. For someone striving to win in terms of a successful solution, this threat evokes a mass response in which the most immediate superficial solution is clutched frantically as a balm to anxiety. . . . Yet if we are to perceive all the implications and possibilities of the new we must risk at least temporary ambiguity and disorder. Human beings are heirs to a legacy of frozen words and ways of perceiving that wrap their world in comfortable familiarity."

The hold of the familiar precludes the possibility of permitting the unguided imaginative promptings that emerge during the creative process to have spontaneous free play.

The truly creative person is not afraid of disorder or ambiguity. On the contrary, he seems rather attracted to phenomena that are not fully ordered or readily comprehended, and he prefers

The truly creative person is not afraid of disorder or ambiguity.

cognitively challenging and complex situations. As a result, he is aware of and open to the intricate, confusing, and paradoxical qualities of most situations. There is no desire motivated by fear to close out, ostrich-fashion, any conflicting or ambiguous elements he encounters. Like all human beings, he seeks integration and order but is willing to seek it without shutting out the chaotic or the ambiguous; he has little fear of the unexpected or the unknown.

In his work he is always ready to relax any binding habit patterns and adheres as little as possible to preconceived plans or stereotyped approaches. He also shows his pliability by being able to consider simultaneously different or conflicting concepts and frames of reference.

In addition, the creative person shows his greater plasticity and adaptability while creating; he respects groping and uncertainty while forming and ordering his thoughts.

Discernment And Selectivity

By overemphasizing the factor of *fluency*, those who have investigated creativity, may have overshadowed the importance of another attribute, often overlooked in the discussions of the creative process—the ability to discern the fundamentals in a problem. The factor of discernment, the sensing of relevance, the intuitive feeling of what is significant, is in some ways opposed to fluency but may be as crucial an attribute for creativity as fluency is.

When confronting a problem, creative people differ from the less creative and the noncreative in the quality of elements they select. They are better able to

Complete Personal Accountant: we've made the best much more friendly.

If you have any doubts that we offer the best and most complete personal financial package available, look over the features listed below. Now we have the only package with **full screen editing** for Atari 400/800;* TRS-80 COLOR, Commodore 64* and VIC-20; the ability to move the cursor in any direction makes our accountant-designed package even more friendly than before. No one else offers all of these:

1. CHECKBOOK MAINTENANCE—automatically balances your checkbook with each entry; manages checks, charges, deposits, and interest quickly and accurately.
2. CHART OF ACCOUNTS—maximum of user flexibilty with up to 99 accounts plus 9 subcategories may be defined.
3. CHECK SEARCH—multi-reference; tracks items on every field including tax deductibles.
4. NET WORTH/INCOME/EXPENSE STATEMENT—know-exactly-where-you-stand program generates statements with the touch of a key.
5. DETAIL & SUMMARY BUDGET ANALYSIS—an absolute necessity in financial planning.
6. CHECK WRITER—prints personalized checks.**
7. PAYMENTS/APPOINTMENTS CALENDAR—monthly displays of up to 250 bills and 200 appointments.
8. COLOR GRAPH DESIGN PACKAGE—graphs all monthly files.
9. MAILING LIST—maintains all records, sorts by name or zip, allows add/change/delete.
10. FRIENDLY USER MANUAL—complete with indexing, flow charts and diagrams; the most thorough documentation on the market.

This all adds up to the finest personal financial system available—comprehensive enough for a small business. Less than one hour of data input per month will allow this **menu-driven package** to help you handle your finances with a lot more fun than drudgery. Plus, ours is the only expandable system; purchase the package in sections and add on as your financial needs grow. Features 1, 2, 3 and 6: $39.95 diskette, $38.95 cassette; Features 4 and 5: $29.95 diskette, $26.95 cassette; Features 7, 8 and 9: $29.95 diskette, $26.95 cassette; **or save $19.90 or $15.90 respectively by buying the entire system for $79.95 diskette, $74.95 cassette.**

Prints all statements and files on any 80 column printer.

*Random Access available for disk.
**Atari Commodore 64 and TRS-80 COLOR

Prices subject to change without notice. See your local dealer or order direct. New catalog available. Add $3.00 for postage and handling. Credit card orders call toll free:

1-800-334-SOFT

DEALER INQUIRIES INVITED

programmer's institute

a division of **FUTUREHOUSE, INC.**

p.o. box 3470, dept. A, chapel hill, north carolina 27514, 919-967-0861

CIRCLE 206 ON READER SERVICE CARD

judge which factors must be taken into account and which can be neglected or discarded without risk of error. They are also able to discard irrelevant ideas, however original, that simply do not fit, whereas a merely fluent person may have his attention tangled amid a jungle of possibilities. In addition, the creative individual shows his selectivity in his ability to organize his work as economically as the objectives allow. He won't allow any superfluous clutter to ruin the elegance of his creative solutions.

In creative problem solving, it is not necessarily the individual who is ebulliently fluent about a problem, nor the person who reaches the highest degree of abstraction in analysis, who shows the most creativity. Whether fluent or not, the individual who can grasp the heart of the matter and has understood the core of a problem, frequently is the most creative.

In creative thinking it is the *quality* that counts and not necessarily the *quantity* of ideas produced. Quantity can add up to nothing if the central point is missed. What counts is the discriminative power to see in an area of experience the relevant and qualitatively significant. Creativity means penetrating to the essence, discerning the crux of the problem, rather than merely exhibiting a wealth of notions and ideas.

The creative individual is guided by a hunch or an intuitive feeling that enables him to exercise choice, taste, and discernment. The intuitive feeling enables him to make valid distinctions in the complex interplay of elements with which he is dealing. Without this feeling, he not only misses much of significance, but is apt to get lost in a welter of irrelevancies.

Tolerating Isolation

When ready to work, the creative person isolates himself from the distractions and interruptions of his environment in order to establish a receptive, leisurely mood. He arranges circumstances so that he can be completely alone and undisturbed to concentrate solely on the creative task at hand.

In addition to his ability to tolerate comfortably long periods of physical withdrawal from others, the creative person can tolerate a measure of psychological isolation. If he works in an organization, he realizes that his capacity to create also requires *psychological distance* from others. This means that he attempts to purge his creative deliberations from considerations such as scheduling, costs, his superior's pet ideas about the approaches to the problem, and most of the other prosaic demands of organizational existence.

Any extraneous considerations that are grafted onto his problem can block the emergence of new ideas. They can act as barriers by inducing anxiety and guilt feelings because he is not doing what is expected or demanded of him. Ideally, he should be allowed to let his mind work at its own pace and in conformity with its own natural, congenial way. Although the creative person requires periods of privacy and is frequently considered to be a "lone wolf," he is seldom withdrawn, isolated, or uncommunicative.

One cannot be creative without being out there and alone.

It should be pointed out, however, that prolonged periods of isolation from others tend to deflate and devitalize rather than enhance his capacity to create. Imagination—when isolated or encapsulated—shrinks and shrivels. It must be nourished occasionally by active participation with others. But the creative person cannot allow undue influence from others. He has to retain a safe margin of social distance to do justice to his creative potential.

Because the creative process is a private and internally motivated affair, the creative individual must have the courage and ego strength to face loneliness when venturing into the unknown. Once he is committed to the no-return path toward the unknown, it is almost impossible for him to rely on somebody else or to share the responsibility and the development of his idea. Although teamwork projects are popular these days, the creative person seldom fulfills his potential through collaboration. In the realm of genuine creativity there is only one solo instrument: the private individual mind and personality of the creator.

As Carl R. Rogers states: "One cannot be creative without being out there and alone;" the extent of the aloneness depends on the extent of the creativity. The more creative the act, the more completely alone one is."

And he frequently needs all the courage and self-confidence he can muster to stand up to the criticisms aimed at his idea, for any radically new idea almost always encounters a mountain of resistance and criticism.

The need for isolation and detachment does not mean that the creative individual can totally dispense with encouragement and recognition. Many things of permanent value have been created only because the creative individual received, at one time or another, a great deal of encouragement and stimulation from somebody. Yet, in the final analysis, he must rely on himself. Support and encouragement can be easily withdrawn and constitute only flimsy crutches on the fragile creative terrain. The condition of self-sufficiency and self-responsibility has to be rooted in the creative person himself.

Incubation

During the creative process, there comes a time when thinking becomes ponderous and clogged, when errors start to pile up and no further new insights occur. This is the time for the creative person to stop his work on the problem and turn to something freer and different. Many creative people find a welcome change of pace in music, painting, sightseeing, manual tasks, daydreaming, reverie, and so on. These activities not only provide a refreshing interlude, but enable his unconscious mental activities the freedom to operate unrestrained by conscious concentration.

Although the creative person spends a great deal of his conscious effort to solve a problem, he realizes the limitations of this effort and finally resorts to incubation. As psychologist John M. Schlien points out: "Although he has confidence in his ability, the creative person also has an attitude of respect for the problem and admits the limits of his conscious

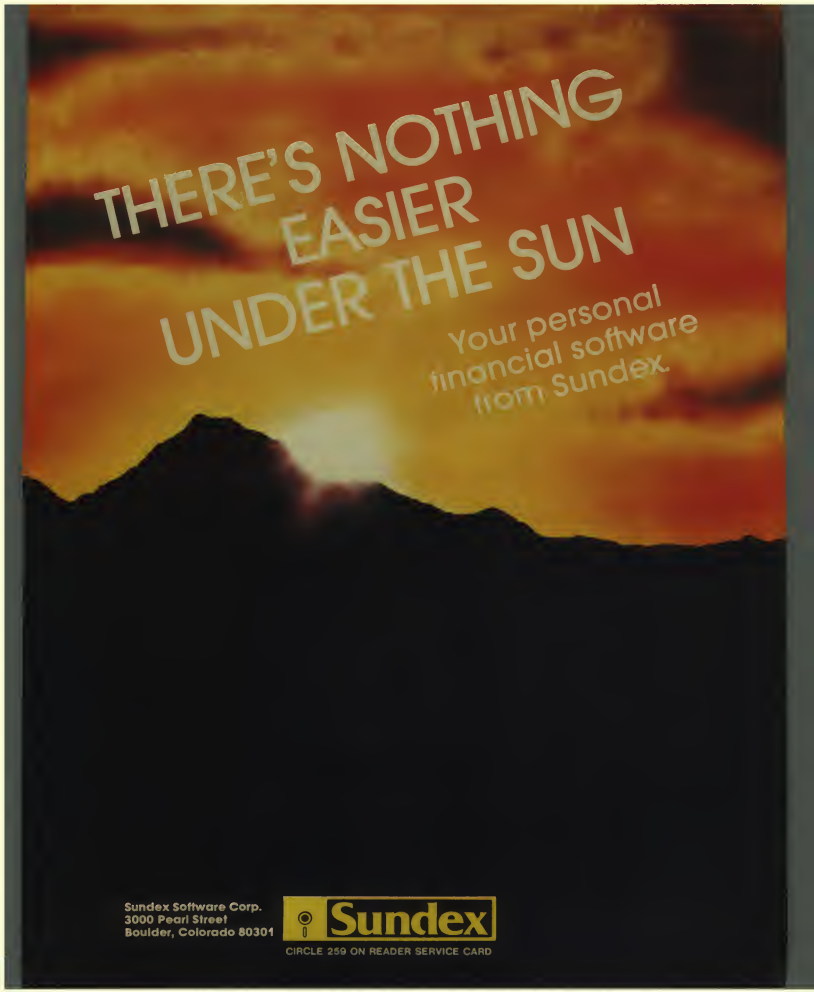
THERE'S NOTHING EASIER UNDER THE SUN
Your personal financial software from Sundex.
Sundex Software Corp.
3000 Pearl Street
Boulder, Colorado 80301
Sundex
CIRCLE 259 ON READER SERVICE CARD

A NEW BREAKTHROUGH

SAVE UP TO 50% WITH OUR CHARTER SUBSCRIPTION OFFER!

Introducing A+, the Most Significant Advance in Apple History!

It's here! Big, bold and bursting with page after page of the latest in hardware, software, programming—and more! **A+** is the monthly magazine written exclusively for your Apple microcomputer. Each issue gets you involved with a host of fascinating features, probing updates, unique departments—and reaches to the depths of your imagination to challenge you with daring new strategies and adventures!

Here's just a sampling of what A+ is all about:

HARDWARE: From the latest advances in telecommunications and networking…to new ways to augment memory and access a wider variety of peripherals with greater ease…each issue of **A+** gets you involved.

SOFTWARE: What's new on the market and how you can make your system more powerful…plus full reviews and programming information.

UTILITIES AND DIAGNOSTICS: In addition to language utilities, **A+** helps you troubleshoot problems…makes you faster and more efficient…with utilities ranging from record processing to data transfer.

BUSINESS AND FINANCE AIDS: Software for financial forecasting and analysis…general accounting programs…financial news retrieval services…and business graphics so you can see just where your money is going.

GAMES: Take the **A+** challenge—with hoards of innovative brain teasers…from games to help you learn spelling and arithmetic…to games that provide fun and adventure!

Save up to 50% on

THE MAGAZINE FOR apple MICROCOMPUTING

Yes! I want to subscribe to A+.

- ☐ One year (12 issues) only $15.49—38% off!
- ☐ Two years only $26.49—47% off!
- ☐ Three years only $37.49—50% off!

Savings based on full one-year subscription price of $24.97.

CHECK ONE:

☐ Payment enclosed. ☐ Bill me later.

Please charge my credit card:

☐ American Express ☐ MasterCard ☐ Visa

Card No._____ Exp. Date_____

Mr./Mrs./Ms._____ 8H054
(please print full name)

Company_____

Address_____

City_____

State_____ Zip_____

Offer valid in U.S. and possessions only. Please allow 30 to 60 days for delivery of first issue.

OFFER EXPIRES NOVEMBER 30, 1983

Save up to 50% on

THE MAGAZINE FOR apple MICROCOMPUTING

Yes! I want to subscribe to A+.

- ☐ One year (12 issues) only $15.49—38% off!
- ☐ Two years only $26.49—47% off!
- ☐ Three years only $37.49—50% off!

Savings based on full one-year subscription price of $24.97.

CHECK ONE:

☐ Payment enclosed. ☐ Bill me later.

Please charge my credit card:

☐ American Express ☐ MasterCard ☐ Visa

Card No._____ Exp. Date_____

Mr./Mrs./Ms._____ 8H054
(please print full name)

Company_____

Address_____

City_____

State_____ Zip_____

Offer valid in U.S. and possessions only. Please allow 30 to 60 days for delivery of first issue.

OFFER EXPIRES NOVEMBER 30, 1983

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 66 BOULDER, COLORADO

POSTAGE WILL BE PAID BY ADDRESSEE

P.O. Box 2964
Boulder, Colorado
80321

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 66 BOULDER, COLORADO

POSTAGE WILL BE PAID BY ADDRESSEE

P.O. Box 2964
Boulder, Colorado
80321

FOR YOUR APPLE...™

A+
apple
CARTRIDGE WINCHESTER DRIVES... A TANTALIZING COMBINATION OF CONVENIENCE & CAPACITY
APPLE POLISHING: A SHORT COURSE ON TAKING CARE
THE STOCK MARKET STORY... THE UPS AND DOWNS
A TREASURE CHEST OF GAMES
APPLE PIE... COOKING WITH YOUR APPLE
APPLE PIE... COOKING WITH YOUR APPLE

PROGRAMMING TOOLS: Speed up program development with Apple text editors, testing and debugging aids and data base management systems. Since your Apple can speak many languages—from Cobal to Basic and Pascal—**A+** gives you a wide range of utilities for each language so you can create your own exciting programs.

HOME/PERSONAL PROGRAMS: covers it all...from basic processing...to helping you draw with Apple graphics...to speed reading...music theory and composition... even a course on cooking with your Apple... and then how to monitor your diet easily and accurately...along with many educational programs to learn math, science, and geography.

DATA FILES: Let **A+** probe new data base management systems so you'll be able to organize, store and retrieve information in ways you never thought possible.

YOUR TURN: Speak up with your ideas and innovations and network with other Apple users near and far.

Plug into Savings of Up to 50% with Our Limited Time Charter Offer, Good Until Nov. 30, 1983

YES! I want to subscribe to **A+** for:

- ☐ One year (12 issues) only $15.49—38% off
- ☐ Two years only $26.49—47% off
- ☐ Three years only $37.49—50% off

Savings based on full one-year subscription price of $24.97.

Name_____

Address_____ 8H054

City_____

State_____ Zip_____

Check One: ☐ Payment enclosed. ☐ Please bill me.

Please charge my:
☐ MasterCard ☐ VISA ☐ American Express

Card No._____ Exp. Date_____

Would you like to receive special offers from qualified users of our mailing list? ☐ YES ☐ NO

MAIL TO: **A+**, P.O. Box 2964, Boulder, CO 80322

YOUR IJG DEALER HAS IT.

BOOKS

0TRS-80 Disk & Other Mysteries.
The "How To" book of data recovery by H. C. Pennington. 128 pages, $22.50

Microsoft BASIC Decoded & Other Mysteries.
The complete guide to Level II operating systems & BASIC by James Farvour. 312 pages, $29.95

BASIC Faster & Better & Other Mysteries.
Microsoft BASIC programming tricks & techniques by Lewis Rosenfelder. Software available on disk. Radio Shack Cat. No. 62-1002. 290 pages, $29.95

The Custom TRS-80 & Other Mysteries.
A guide to customizing TRS-80 hardware and software by Dennis Bathory Kitsz. Schematics and listings. 336 pages, $29.95

Machine Language Disk I/O & Other Mysteries.
The guide to machine language disk software for TRS-80 Models I & III by Michael Wagner. 288 pages, $29.95

TRSDOS 2.3 Decoded & Other Mysteries.
The TRSDOS operating system explained by James Farvour. Disassembly of code with commentary. 300 pages, $29.95

BASIC Disk I/O Faster & Better & Other Mysteries.
Programming techniques and helpful subroutines, by Lewis Rosenfelder, for BASIC programs which store or retrieve data from disk. (Available in June) $29.95

How To Do It On The TRS-80.
The applications guide to the TRS-80 Models I, II, III & Color Computer by William Barden, Jr. 300 pages, $29.95 (Available in Spring '83)

Electric Pencil Operators Manual.
By Michael Shrayer and H.C. Pennington. 123 pages, 24.95

The TRS-80 Beginners Guide To Games & Graphics.
Simple programs teach basic concepts of graphics and game design, by Tom Dempsey. (Available in July) $24.95

The Captain 80 Book of BASIC Adventures.
Eighteen program listings plus Adventure program generator, by Bob Liddil. 252 pages, $19.95

SOFTWARE

Electric Pencil 2.0z Word Processing System.
The easy to learn, easy to use word processing system by Michael Shrayer. Includes operators manual. Disk $89.95, Cassette or Stringy Floppy $79.95

BLUE Pencil — 50,000 Word Expandable Dictionary.
Companion to the Electric Pencil 2.0z system. Disk $89.95

RED Pencil — Automatic Spelling Correction. For use with the Electric Pencil 2.0z word processing system. Must be accompanied by Blue Pencil to operate. Disk $89.95

BFBDEM — BASIC Faster & Better Library disk by Lewis Rosenfelder. 32 demonstration programs, BASIC overlays, video handlers, sorts and more for the Model I & III. Radio Shack Cat. No.260-2021. Disk $19.95

BFBLIB — BASIC Faster & Better Demonstration disk by Lewis Rosenfelder. 121 functions, subroutines and user routines for the Model I & III. Disk Only 19.95

UTILITIES

DISKMAP Produces two different reports; a listing of disk space allocation by granule, and a listing of all granules allocated to each data file. Disk $29.95 Retail.

TRANSLATE Convert any character to any character or string. Create your own shorthand. Print special characters. Disk $49.95

NEW BOOK!

GAMES

CYBERCHESS
Chess Improvement System. Not a game, but a powerful and effective method for improving one's skill in chess. Choose from 55 amateur or 55 professional disk packets with 4 different games on each. System Disk $29.95 (Includes four games). Each amateur or professional disk $19.95 each.

FLAG RACE
Race your car through a maze and try to reach all the flags before being caught and killed by drone cars. Can you do it? For Models I & III. Disk $24.95

SPACE ROBBERS
Inter-galactic thieves are after your supplies and you must stop them before they take it all. For Models I & III. Disk $24.95

ALIENS
Invaders attempt to land and you must stop them. But watch out, you're dead if they land on you. For Models I & III. Disk $24.95

INTERCEPTOR
The aliens are attacking you in wave after wave, can you survive and get back to the mother ship to refuel? For Models I & III. Disk $24.95

FUNSOFT Games distributes through IJG for Models I & III.

BABLE TERROR Babies are roaming the maze like complex everywhere but you can only see a few yards ahead, can the Babies be cleared out before they clear out you? Disk $24.95, Cassette $19.95

THE BLACK HOLE Your mission is to seek-out and destroy the Dorfian leader. But, can you survive the perils of the Black Hole? Disk $24.95, Cassette $19.95

APPLE PANIC Crazed apples chase you over many ladder connected brick levels. Your only hope is to dig holes in the floor and beat them down when they get stuck. Disk $24.95, Cassette $19.95

MAD MINES Mad Mines are being placed into the space around your planet. As their mad pace speeds up, the situation becomes more difficult. Can they all be destroyed? Disk $24.95, Cassette $19.95

TIME RUNNER Newly discovered land is yours for the taking. All you have to do is take it . . . before the defender droids catch you that is. Disk $24.95, Cassette $19.95

IJG products are available at computer stores, B. Dalton Booksellers, Radio Shack Computer stores, and independent dealers around the world.

If IJG products are not available from your local dealer, order direct from IJG. Include $4.00 for shipping and handling per item. Foreign residents add $11.00 plus purchase price per item. U.S. funds only please.

IJG, Inc. 1953 West 11th Street
Upland, California 91786
Phone: 714/946-5805

If it's from IJG IT'S JUST GREAT!

TRS-80 TM Tandy Corp.
Microsoft TM Microsoft Corp.
Electric Pencil TM Michael Shrayer
© IJG, Inc. 1983

power in forcing the problem to solution. At some point, called 'incubation' by many who have reported the process, he treats the problem 'as if it has a life of its own,' which will, in its time and in its relation to his subliminal or autonomous thought processes, come to the solution. He will consciously work on the problem, but there comes a point when he will 'sleep on it.'"

During the incubation period, the autonomous thought processes in the unconscious take over and continue to solve the problem. Often, when the conscious forcing of the problem to solution has failed, the incubational process succeeds.

Productive Periods

The creative person develops an awareness in *retrospect* of the periods when he solved his problems creatively. He takes note of the methods that were successful and those that failed. He tries to learn why by retracing, as far as he can, the routes he followed and noting those he avoided. He has learned that knowledge of his particular idiosyncrasies and style of creating facilitates his creative process.

He schedules his creative thinking periods for those times when he has his most favorable mental set for producing ideas. He is aware of his personal rhythms and peaks and valleys of output. By keeping a record of those periods during the day or night in which he is most creative, he can establish a pattern and plan ahead, reserving peak periods for concentration and uninhibited thinking, and his less productive time for reading and for gathering information. Even if he has not established a timesheet of productive periods, he has at least developed a sensitivity to those moods that promise really creative returns from his efforts, and he knows when they are approaching.

Other Characteristics

Here are some of the other characteristics that differentiate the more creative individual from the less creative:

Often, when the conscious forcing of the problem to solution has failed, the incubational process succeeds.

- He is more observant and perceptive, and he puts a high value on independent "true-to-himself" perception. He perceives things the way other people do but also the way others do not.
- He is more independent in his judgments, and his self-directed behavior is determined by his own set of values and ethical standards.
- He balks at group standards, pressures to conform and external controls. He asserts his independence without being hostile or aggressive, and he speaks his mind without being domineering. If need be, he is flexible enough to simulate the prevailing norms of cultural and organizational behavior.
- He dislikes policing himself and others; he does not like to be bossed around. He can readily entertain impulses and ideas that are commonly considered taboo; he has a spirit of adventure.
- He is highly individualistic and nonconventional in a constructive manner. Psychologist Donald W. MacKinnon puts it this way: "Although independent in thought and action, the creative person does not make a show of his independence; he does not do the off-beat thing narcissistically, that is, to call attention to himself. . . . He is not a deliberate nonconformist but a genuinely independent and autonomous person."
- He has wide interests and multiple potentials—sufficient to succeed in several careers.
- He is constitutionally more energetic and vigorous and, when creatively engaged, can marshal an exceptional fund of psychic and physical energy.
- He is less anxious and possesses greater stability.
- His complex personality is, simultaneously, more primitive and more cultured, more destructive and more constructive, crazier and saner. He has a greater appreciation and acceptance of the nonrational elements in himself and others.
- He is willing to entertain and express personal impulses, and pays more attention to his "inner voices." He likes to see himself as being different from others, and he has greater self-acceptance.
- He has strong aesthetic drive and sensitivity, and a greater interest in the artistic and aesthetic fields. He prefers to order the forms of his own experience aesthetically, and the solutions at which he arrives must not only be creative, but elegant. Truth for him has to be clothed in beauty to make it attractive.
- He searches for philosophical meanings and theoretical constructs and tends to prefer working with ideas, in contradistinction to the less creative who prefer to deal with the practical and concrete.
- He has a greater need for variety and is almost insatiable for intellectual ordering and comprehension.
- He places great value on humor of the philosophical sort and possesses a unique sense of humor.
- He regards authority as arbitrary, contingent on continued and demonstrable superiority. When evaluating communications, he separates source from content, judges and reaches conclusions based on the information itself, rather than whether the information source was an "authority" or an "expert." □

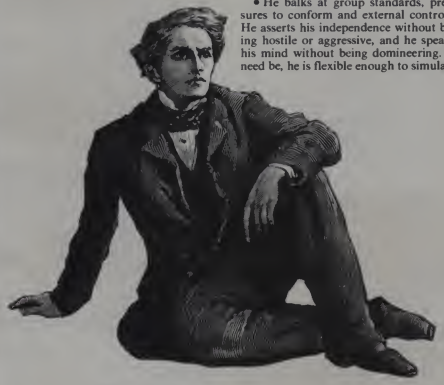

Modular Arithmetic and Computer Art

Matthew Walling and David Meger

For thousands of years people have been using mathematical shapes based on precise mathematical formulae to generate artistic designs for everything from architecture to pottery. So it is not surprising that we should find art in number patterns—an art which is created by the direct substitution of colors for numbers. The number patterns that we have chosen to investigate are produced using modular arithmetic.

Although the term modular (or remainder) arithmetic may not be immediately familiar, we use it every day to tell time. The clock is a "mod twelve number system." For example, three hours past ten o'clock is not thirteen o'clock but one o'clock. One is the remainder when thirteen is divided by twelve. In the clock example, zero is the remainder when twelve is divided by twelve, therefore the twelve in the clock should more properly be replaced by zero. Any mod number system, regardless of the dividend, should contain only numbers from 0 to mod-1, and therefore will have repetitive patterns of numbers.

The study of modular (or remainder) arithmetic dates back to the first century A.D. and the Chinese mathematician Sun-Tsu. Recently teachers have been introducing modular arithmetic to junior high students as art in an attempt to generate more enthusiasm for mathematics. The technique involves the use of graph paper, and felt tip pens, crayons, colored pencils, or construction paper.

The students use remainder arithmetic to make a number table of remainders on the graph paper. Number tables are formed by first labelling rows and columns on the graph paper, then filling in the rest of the blocks with the numbers which are the remainders when the row is either added or multiplied by the column and divided by the chosen mod. The remainders are then replaced by colors. Using this technique, one design can take more than an hour to complete. With a personal computer, however, designs can be churned out in rapid succession.

Matthew Walling and David Meger, Seventh grade, Our Lady of Peace School, Plainfied Rd., Darien, IL 60559.

Table 1. Single pattern block for addition mod 7.

+	1	2	3	4	5	6	7
1	2	3	4	5	6	0	1
3	4	5	6	0	1	2	3
4	5	6	0	1	2	3	4
5	6	0	1	2	3	4	5
6	0	1	2	3	4	5	6
7	1	2	3	4	5	6	0

Table 2. Single pattern block for multiplication mod 8.

X	1	2	3	4	5	6	7	8
1	1	2	3	4	5	6	7	0
2	2	4	6	0	2	4	6	0
3	3	6	1	4	7	2	5	0
4	4	0	4	0	4	0	4	0
5	5	2	7	4	1	6	3	0
6	6	4	2	0	6	4	2	0
7	7	6	5	4	3	2	1	0
8	0	0	0	0	0	0	0	0

The Tables 1 through 4 are typical modular number systems for both addition and multiplication. Figure 1, an example of an addition number system shows a striped pattern. This pattern is observed for all mods using addition Subtraction is the same, but the stripes go in the opposite direction.

For multiplication number systems for even mods (Table 2 and Figure 2) the remainders alternate between even and odd numbers between rows of even numbers. The multiplication number systems using odd mods (Tables 3 and 4 and Figures 3 and 4) have a more complex pattern. All of these systems can be used to generate most unusual patterns.

About the Process

The process of generating remainder number tables is very simple for the computer. With an input statement, the mod is chosen. Then an array of colors versus remainders is formed with another input statement. Two FOR-NEXT loops count rows and columns up to the size of the computer screen. The rows and columns are either added or multiplied. Next the remainder is calculated, the color is set and the point plotted.

The program for the Apple II is shown in Listing 1. It has a short tutorial on modular arithmetic, displays a number system on the screen, displays the Apple color table, and plots the pattern on the lo-res screen.

Listing 2 is written for TRS-80 Color Computer, and Listing 3 is for the TI 99/4. Listings 2 and 3 contain the minimum code necessary for generating the patterns. The TI 99/4 program has the additional ability to plot shapes other than the block to which the other two computers are limited. It can plot any

How many companies offer toll free TOTAL SUPPORT on all hardware & software?

There is only one number to call:

1-800-237-8977

In Florida call 1-813-786-1259

Business Applications Software with TOTAL SUPPORT . . . specializing in: IBM,™ APPLE,™ TRS-80™ and XEROX™

The Systems Group

2340 State Route 580/Suite 234
Clearwater, Florida 33575
Telex 701484

There is only one catalog to have: our new, **free** 100 pages of the best in hardware and software. Send for your copy today!

IBM is a trademark of IBM Corporation
APPLE is a trademark of Apple Computer Inc.
TRS-80 is a trademark of The Radio Shack Division of Tandy Corporation
XEROX is a trademark of Xerox Corporation

CIRCLE 215 ON READER SERVICE CARD

Modular Arithmetic, continued...

shape that can be designed in an eight by eight grid. The block itself can be represented as two colors, one for the background and one for the foreground. With this machine, modular arithmetic art can become quite complex.

Table 3. Single pattern block for multiplication mod 7.

×	1	2	3	4	5	6	7
1	1	2	3	4	5	6	0
2	2	4	6	1	3	5	0
3	3	6	2	5	1	4	0
4	4	1	5	2	6	3	0
5	5	3	1	6	4	2	0
6	6	5	4	3	2	1	0
7	0	0	0	0	0	0	0

Table 4. Single pattern block for multiplication mod 15.

×	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
1	1	2	3	4	5	6	7	8	9	10	11	12	13	14	0
2	2	4	6	8	10	12	14	1	3	5	7	9	11	13	0
3	3	6	9	12	0	3	6	9	12	0	3	6	9	12	0
4	4	8	12	1	5	9	13	2	6	10	14	3	7	11	0
5	5	10	0	5	10	0	5	10	0	5	10	0	5	10	0
6	6	12	3	9	0	6	12	3	9	0	6	12	3	9	0
7	7	14	6	13	5	12	4	11	3	10	2	9	1	8	0
8	8	1	9	2	10	3	11	4	12	5	13	6	14	7	0
9	9	3	12	6	0	9	3	12	6	0	9	3	12	6	0
10	10	5	0	10	5	0	10	5	0	10	5	0	10	5	0
11	11	7	3	14	10	6	2	13	9	5	1	12	8	4	0
12	12	9	6	3	0	12	9	6	3	0	12	9	6	3	0
13	13	11	9	7	5	3	1	14	12	10	8	6	4	2	0
14	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
15	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Figure 1. Addition mod 7: (0)yellow, (1)black, (2)yellow, (3)black, (4)yellow, (5)black, (6)yellow.



Figure 2. Multiplication mod 8: (0)yellow, (1)dark blue, (2)yellow, (3)dark blue, (4)yellow, (5)dark blue, (6)yellow, (7)dark blue.



Figure 3. Multiplication mod 7: (0)yellow, (1)dark blue, (2)yellow, (3)dark blue, (4)yellow, (5)dark blue, (6)yellow.



Figure 4. Multiplication mod 15: (0)yellow, (1)black, (2)yellow, (3)black, (4)yellow, (5)black, (6)yellow, (7)black, (8)yellow, (9)black, (10)yellow, (11)black, (12)yellow, (13)black, (14)yellow.



A Little Bug Can Do A Lot Of Damage.

It looks so little, but it eats so much—just like the contamination on your computer's disk drive head. It may not seem like much, but all it takes is a micro-sized particle of dirt to wipe out a lot of data, and once it's gone, it's gone forever.

That's why you need PerfectData. The PerfectData Disk Drive Head Cleaning Kit eliminates problem-causing dirt so you can keep your computer and your data the way you want it—perfect.

The PerfectData Disk Drive Head Cleaning Kit cleans single or dual-sided drives simply and effectively.

PerfectData's patented wet/dry method is the cleaning method recommended by most leading computer and disk drive manufacturers.

The Disk Drive Head Cleaning Kit is just part of a whole family of PerfectData Computer Care Products—all designed to keep your computer and your data in perfect shape. So don't let a bug eat holes in your rose (or data). Visit your Computer Dealer today for PerfectData products. PerfectData Corporation, 9174 Deering Avenue, Chatsworth, CA 91311.

Keep It Perfect.

PerfectData
COMPUTER CARE PRODUCTS

PerfectData is the new name of Innovative Computer Products—the leader in computer care since 1976.

CIRCLE 200 ON READER SERVICE CARD

Figure 5. Mod 7: (0)blue, (1)blue, (2)white, (3)black, (4)black, (5)white, (6)blue.

Figure 6. Mod 5: (0)magenta, (1)blue, (2)white, (3)white, (4)blue.

Figure 7. Mod 15: (0)black, (1)yellow, (2)yellow, (3)yellow, (4)blue, (5)blue, (6)blue, (7)black, (8)black, (9)blue, (10)blue, (11)blue, (12)yellow, (13)yellow, (14)yellow.

Figure 8. Mod 10: (0)black, (1)yellow, (2)yellow, (3)blue, (4)blue, (5)yellow, (6)blue, (7)blue, (8)yellow, (9)yellow.

Figure 9. Mod 9: (0)black, (1)white, (2)white, (3)green, (4)green, (5)green, (6)green, (7)white, (8)white.

Figure 10. Mod 7: (0)black, (1)green, (2)yellow, (3)blue, (4)green, (5)yellow, (7)blue.

INTRODUCING SARGON III. THE FIRST CHESS GAME THAT'S TOUGH ENOUGH FOR BORIS AND EASY ENOUGH FOR BOBBIE.

rgon III™ from Hayden Software. It's the ultimate icrocomputer chess game. Whether you're a aster like Boris Spasky looking for a real chal- ge. Or a novice like little Bobbie Adams who wants to learn the finer points of the game.

Sargon III is the best way to learn chess.

Sargon III gives you the greatest instructional value of any chess game. It allows two players to play each other while it monitors moves for consistency with rules play. You can also query Sargon for move suggesons. If you're playing alone, you can ask Sargon alternate moves after it makes its best move. Sargon III also shows you 107 of the greatest chess mes in history so you can see how the masters did it. Sargon III provides the most complete and informative user manual, making it easier for the novice learn. It includes diagrams from the U.S. Chess deration, suggestions for better play, and descriptions of the 107 historical games.

Sargon III challenges the masters.

Sargon III can be the toughest opponent you'll ever play.

It's more difficult and moves faster than our famous Sargon II. Played at its highest level, Sargon III is the Grand Master of chess games.

If you want to see classic situations and problems, Sargon III will show you. If you want to replay sequences, Sargon III lets you. You can even stop your game in progress and save it to disk or print it out if you want.

Sargon III is compatible with the Apple personal computers, the IBM Personal Computer and other popular compatibles.

So visit your local retailer and ask for Sargon III by name.

It's simply the best move you can make.

SARGON III™

HAYDEN SOFTWARE

III is a registered trademark of Hayden Software. Apple is a registered trademark of Computer, Inc. IBM is a registered trademark of International Business Machines Corp.

Some Very Good Reasons to Buy an Echo Speech Synthesizer.

We're confident we have the most intelligible, versatile, and economical speech synthesizer on the market. Once you hear it, we're sure you'll be convinced too. All ECHOs are capable of speaking in four different voice modes which range from a robotic machine voice to natural female speech. (The fixed speech and custom modes are optional.)

It's Easy To Use

Unlike other speech systems, the ECHOs are very simple to use. It only takes a minute or two to get the ECHO talking. Any text which can be printed to the screen can be spoken. If you've written a BASIC program you can add speech with simple modifications.

Software Compatibility

Not only can you add speech to the programs you write yourself, over 25 top educational and adventure software manufacturers are currently designing programs to be compatible with the ECHO II. Be watching for details.



Value

Each ECHO comes ready to use with a speaker and tutorial-style manual. The ECHO II, priced at $149.95, also comes with a variety of demonstration and utility programs. The new ECHO GP (General Purpose), priced at $199.95 is a stand-alone unit with its own on-board microprocessor; it will interface with any computer through the serial port. All ECHOs have a two year warranty.

Bells And Whistles

If you want bells, whistles, music and sound effects, plus state-of-the-art sprite graphics capabilities, the ECHO technology is available on Synetix Systems' new Supersprite Board.

Check It Out

Most Apple dealers have the ECHO II available for demonstration as part of Street Electronics/ Orange Micro's unique Grappler+™, Bufferboard™, ECHO II™ Talking Demonstration.

Street Electronics Corporation

1140 Mark Avenue Carpinteria, CA 93013
Telephone (805) 684-4593

The Echo II is a registered trademark of Street Electronics Corporation. The Grappler+ and Bufferboard are registered trademarks of Orange Micro.

CIRCLE 256 ON READER SERVICE CARD

About the Pictures

The black and white figures were made by dumping the design to a printer using the 16 levels of gray possible with a Pkaso interface. The colors represented by the dot densities are listed along with the numbers they replace. These designs were made using only two colors, one for odd remainders and one for even remainders.

Figures 5 through 10 are color pnotos of the monitor display for which patterns were made by grouping the colors in common multiples of the mod. Again the colors are listed along with the numbers they replace. About the only method that won't produce patterns is using a different color for each remainder. Experimentation leads to some interesting results.

Acknowledgment

The authors would like to thank Helene LaBonville for the Color Computer program and photography and Priscilla Walling for the TI 99/4 program. □

Listing 1. Applesoft Basic program for generating mod math art.

```
10  HOME : DIM CLR(20)
20  VTAB 3
30  FOR I = 1 TO 40
40  PRINT "*";
50  NEXT
60  PRINT : PRINT
70  PRINT "                MOD
ARITHMETIC"
80  PRINT
90  PRINT "                   AND"
100  PRINT
110  PRINT "                COMPUTER
ART"
120  PRINT
130  PRINT "                   BY"
140  PRINT
150  PRINT "                DAVID
MEGER"
160  PRINT
170  PRINT "                   AND"
180  PRINT
190  PRINT "                MATTHEW
WALLING"
200  VTAB 21
210  FOR I = 1 TO 40
220  PRINT "*";
230  NEXT I
240  FOR I = 1 TO 2000
250  NEXT I
260  HOME
270  PRINT "DO YOU KNOW WHAT MOD
ART IS? IF YOU DO  THEN FINE. BUT
IF YOU ANSWER NO THEN     WE'LL
TELL YOU. (ANSWER YES OR NO):";
280  INPUT ANS$
290  IF LEFT$(ANS$,1)   "Y" THEN
410
300  HOME : PRINT "MOD ARITHMETIC
IS A CONCEPT WITH WHICH  WE ARE ALL
FAMILIAR. FOR EXAMPLE ,IF IT IS TEN
O'CLOCK,THEN THREE HOURS LATER
ITWILL BE ONE O'CLOCK  (AND NOT, AS
IN    SIMPLE ARITHMETIC, THIRTEEN
O'CLOCK.)";
310  PRINT "   A CLOCK OR WATCH IS
AN EXAMPLE OF WHAT  IS KNOWN AS A
MODULAR12  SYSTEM.  THE 12MEANS
THAT THERE ARE ONLY 12
NUMBERS...1THROUGH 12.";
320  PRINT "   IN ORDINARY
ARITHMETIC,   THERE IS AN INFINITE
NUMBER OF INTEGERS.TO DO MOD
ARITHMETIC SOLVE THE PROBLEM,
DIVIDE THE ANSWER WITH THE MOD THEN
PUT DOWN THE REMAINDER."
330  PRINT
340  PRINT "TO SHOW THAT YOU
UNDERSTAND MODULAR      ARITHMETIC
GIVE THE ANSWER TO THE FOLLOWING
PROBLEM USING MOD 4."
350  VTAB 20:CALL -868: PRINT "6 +
4 =";
360  INPUT ANS
370  IF ANS <  > 2 THEN  HTAB 20:
VTAB 20: PRINT "WRONG TRY AGAIN":
GOTO 350
380  VTAB 20: HTAB 20: PRINT "GOOD
JOB!!!!"
390  FOR M = 1 TO 2000
400  NEXT M
410  HOME : PRINT
420  PRINT "TO GET MOD ART YOU MUST
COLOR EACH      ANSWER OR GROUP OF
ANSWERS A DIFFERENT  COLOR."
430  PRINT
440  INPUT "WHAT MOD WOULD YOU LIKE
TO WORK WITH?   (1-18): ";MOD
450  IF MOD < 1 OR MOD > 18 THEN
440
460  HOME
470  FOR ROW = 0 TO MOD
480  FOR COL = 0 TO MOD
490 ANS = COL * ROW
500 R =  INT ((ANS / MOD -  INT
(ANS / MOD)) * MOD + .5)
510  IF R < 10 THEN  PRINT " ";
520  PRINT R;
530  NEXT COL
540  PRINT
550  NEXT ROW
560  PRINT
570  PRINT " SINGLE PATTERN BLOCK"
580  VTAB 23
590  PRINT "        MULTIPLICATION
MOD ";MOD
600  GET KEY$
610  HOME
620  PRINT "ENTER THE COLORS THAT
YOU WANT FROM THE TABLE BELOW"
630  PRINT : PRINT
640  PRINT "0 BLACK"; TAB( 20);"8
BROWN"
650  PRINT "1 MAGENTA"; TAB( 20);"9
ORANGE"
660  PRINT "2 DARK BLUE"; TAB(
20)"10 BLUE GREY"
```

```
670  PRINT "3 PURPLE"; TAB( 20);"11
PINK"
680  PRINT "4 DARK GREEN"; TAB(
20);"12 GREEN"
690  PRINT "5 GREY"; TAB( 20);"13
YELLOW"
700  PRINT "6 MEDIUM BLUE"; TAB(
20);"14 AQUA"
710  PRINT "7 LIGHT BLUE"; TAB(
20);"15 WHITE"
720  PRINT : PRINT
730  FOR I = 0 TO MOD - 1
740  VTAB 18:CALL -868: PRINT
"COLOR FOR NUMBER ";I;
750  INPUT CLR(I)
760  IF CLR(I) < 0 OR CLR(I) > 15
THEN 740
770  NEXT I
780  HOME
790  GR
800  FOR ROW = 0 TO 39
810  FOR COL = 0 TO 39
820 ANS = ROW * COL
830 R =  INT ((ANS / MOD -  INT
(ANS / MOD)) * MOD + .5)
840  COLOR= CLR(R)
850  PLOT COL,ROW
860  NEXT COL
870  NEXT ROW
880  VTAB 23: PRINT "
MULTIPLICATION MOD ";MOD
890  GET KEY$
900  TEXT : HOME
910  GOTO 440
```

*Listing 2. Compressed TRS-80 Color Computer (16K) version. Plotting of colors is achieved via PRINT a (ROW*32 + COL), CHR$ (color code).*

```
1 ' MOD ARITHMETIC AND COMPUTER ART
6 ' TRS-80C VERSION BY HM
LABONVILLE
10 CLS: DIM CLR(15)
420 PRINT "TO GET 'MOD ART' YOU
MUST COLOR EACH ANSWER OR GROUP OF
ANSWERS A DIFFERENT COLOR."
430 PRINT
440 INPUT "WHAT MOD WOULD YOU LIKE
TO WORK WITH (1-15): ";MOD
450 IF MOD<1 OR MOD>15 THEN 440
620 PRINT "ENTER THE COLORS THAT
YOU WANT  FROM THE TABLE BELOW:"
630 PRINT
640 PRINT TAB(5) "<0> BLACK    ";
CHR$(128)
650 PRINT TAB(5) "<1> GREEN"
660 PRINT TAB(5) "<2> YELLOW
";CHR$(159)
670 PRINT TAB(5) "<3> BLUE     ";
CHR$(175)
680 PRINT TAB(5) "<4> RED      ";
CHR$(191)
690 PRINT TAB(5) "<5> BUFF     ";
CHR$(207)
700 PRINT TAB(5) "<6> CYAN     ";
CHR$(223)
710 PRINT TAB(5) "<7> MAGENTA ";
CHR$(239)
720 PRINT TAB(5) "<8> ORANGE   ";
CHR$(255)
730 FOR I=0 TO MOD-1
740 PRINT @448, "COLOR FOR NUMBER
"; I;
750 INPUT CLR(I)
760 IF CLR(I)<0 OR CLR(I)>8 THEN
740
770 NEXT I
780 CLS(0)
800 FOR ROW =0 TO 14
810 FOR COL =0 TO 31
820 ANS = ROW * COL
830 R=
INT(ANS/MOD-INT(ANS/MOD))*MOD +.5)
840 CLOR=CLR(R)
850 IF CLOR<>0 THEN
MDW$=CHR$(127+16*CLOR)ELSE
MDW$=CHR$(128)
855 PRINT @(ROW*32+COL), MDW$;
860 NEXT COL
870 NEXT ROW
880 PRINT @481, "THIS IS
MULTIPLICATION MOD ";MOD;
890 HM$=INKEY$: IF HM$ =" " THEN
890
900 CLS
910 GO TO 440
```

Listing 3. TI 99/4 Basic program for generating mod math art. Character block can take on any shape.

```
1 REM MOD ARITHMETIC AND COMPUTER
ART
5 REM TI99/4 VERSION BY P. WALLING
10 DIM
CLS(20),CRS(20),A$(20),BKG(20),FRG(
20)

15 CALL CLEAR
25 CODE=32
440 INPUT "WHAT MOD WOULD YOU LIKE
TO TRY(1-12)?: ";MOD
445 IF MOD <1 THEN 440
447 IF MOD >12 THEN 440
620 PRINT "ENTER THE COLORS THAT
YOU WANT FORM THE TABLE BELOW:"
630 PRINT
640 PRINT "1
TRANSPARENT";TAB(15);"9 MEDIUM RED"
```

Nonagon has the best for less . . .

APPLE EDUCATIONAL

	RETAIL PRICE	YOUR PRICE
Brain Bank		
Human Body	590.00	572.00
Skeletal System	70.00	56.00
Micro-Proof & Light		
Proofs & Properties	29.95	23.95
Spinnaker		
Snooper Trooper #1	44.95	35.95
Snooper Trooper #2	44.95	35.95
In Search of Most Amazing Things	39.95	31.95

APPLE GAMES

Broderbund		
AE	34.95	24.50
Gumball	29.95	20.95
Lode Runner	34.95	24.50
Electronic Arts		
Pinball Construction Set (New)	39.95	29.95
Hard Hat Mack	39.95	29.95
Datamost		
Solitaire/Cribbage	34.95	24.50
Edu-Ware		
Rendezvous	39.95	27.95
Armageddon	32.95	23.50
Indocom		
Witness	49.95	34.95
Suspended	49.95	34.95
Microlab		
High Rise	34.95	24.50
Miner 2049er	39.95	27.95
Penguin		
Pie Man	19.95	15.95
Transylvania	19.95	15.95
Quality		
Beneath Apple Manor	29.95	20.95
Sierra-On-Line		
Frogger	34.95	24.50
Apple Cider Spider	33.95	23.95
Ultima II	59.95	41.95
Sir Tech		
Proving Grounds	49.95	34.95
Knight of Diamonds	34.95	24.50
Legacy of Llylgamyn	39.95	27.95
SSI		
Knight of Desert	39.95	27.95
North Atlantic '86	59.95	41.95

APPLE BUSINESS

BPI		
AR/AP/GL/INV	395.00	295.00
Continental		
Home Accountant	74.95	52.50
Property Management	495.95	346.50
Micro Pro		
Wordstar	494.95	346.50
Sierra-On-Line		
General Manager	229.95	160.95
Screenwriter II Professional	199.95	139.95

APPLE UTILITIES

Beagle Brothers		
Apple Mechanic	29.95	20.95
Pronto DOS	29.95	20.95
Double Take	34.95	24.50
Penguin		
Complete Graphics System II	69.96	48.95
Graphics Magician (New)	59.95	41.95
Sensible		
Disk Recovery	29.95	20.95
Super Disk Copy	29.95	20.95
Multi Disk Catalog	24.95	19.95
Back It Up II (New)	79.95	55.95

APPLE HARDWARE

Advanced Logic Systems		
Z Card II	169.95	142.95
SmartTerm II	179.95	151.95
Keyx Micro Computer Products		
Micro Modem II with Terminal Prog	408.95	306.95
Hayes		
Joystick Mach III (IIe)	59.95	44.95
Joystick Mach II (IIe)	49.95	34.95
Joystick Mach III (II+)	49.95	37.95
Joystick Mach II (II+)	39.95	29.95
TG Products		
Joystick (IIe/II+)	64.95	45.50
Paddles	39.95	27.95
Select-a-Port	59.95	41.95
USI		
Hi Res Amber/Green monitor	249.95	169.95

ENTERTAINMENT SOFTWARE

Akari		
Jumpman (EPyx)	39.95	29.95
AE (Broderbund)	34.95	26.50
Pinball Construction Set	39.95	31.95
(Electronic Arts)		
Castle Wolfenstein (Muse)	29.95	22.50
Spy's Demise (Penguin)	19.95	15.95
IBM		
Pinball (Sublogic)	39.95	31.95
Apple Panic (Broderbund)	29.95	23.95
Zork I/II/III (Infocom)	39.95	31.95
Ulysses & Golden Fleece	39.95	31.95
(Sierra-On-Line)		
Flight Simulator (Microsoft)	49.95	39.95
Commodore-64		
Frogger (Sierra-On-Line)	34.95	27.95
Deadline (Infocom)	49.95	39.95
Witness (Infocom)	49.95	39.95
Beyond (Sirius)	39.95	31.95

BUSINESS SOFTWARE

Akari		
File Manager Plus (Synapse)	99.95	74.95
Home Financial Management	29.95	21.95
Akari Writer (Akari)	99.95	74.95
Bank Street Writer	69.95	52.50
IBM		
Visitile	300.00	239.95
Visicalc	250.00	199.95
Multiplan (Microsoft)	275.00	219.95
Wordstar	495.00	346.50
Multi Tool Budget Analysis	150.00	119.95
Commodore-64		
Loan Analyzer (Creative)	19.95	15.95
Word Processor (Quick Brown Fox)	65.00	52.00
Money Manager (Time Works)	24.95	19.95

We carry these and many more products for your Apple, Atari, IBM, and Commodore computers. Please inquire about our free catalog

SPECIALS

Apple	599.95
Book Ends (Sensible)	55.95
Computer SAT (ABL)	21.95
Death in the Caribbean (Microlab)	21.95
Triton Empire (Muse)	15.95
Quest (Penguin)	43.95
Ultima III D (Origin)	39.95
Lisa Handler (Silicon Valley)	49.95
Word Handler (Silicon Valley)	
For All Computers	21.95
Flip'n file	3.00
Picnic Diskette Storage Box	40.00
Verbatim Diskettes 5¼" DSDS	
Apple/Commodore-64	72.95
Bank St. Beg. Basic (PDI)	31.95
Apple	27.95
Bank St. Beg. Basic (PDI)	27.95
Evolution	105.00
Akari	31.95
Dimension X (Synapse)	
Blue Max (Synapse)	35.95
IBM	31.95
PFS: Write	
Algebra I (Edu-ware)	
Commodore-64	
MES-Writer Cart	
MES Grafmaster Cart	

For mail orders: Please include name, address and phone number, type of media and computer for which you are ordering product(s). Enclose your check, money order, or credit card number and expiration date. Add $3.00 for shipping and handling (foreign orders/hardware extra). California residents add 6½% sales tax

NONAGON SOFTWARE
P.O. BOX 1486
EL CERRITO, CA 94530

Purchase Orders from Schools and Colleges welcomed

VISA MasterCard AMERICAN EXPRESS

800-942-2058

(415) 237-4406

CALIFORNIA, ALASKA, HAWAII/FOREIGN ORDERS

NONAGON SOFTWARE

CIRCLE 195 ON READER SERVICE CARD

Modular Arithmetic, continued...

```
650 PRINT "2 BLACK";TAB(15);"10
LIGHT RED"

660 PRINT "3 MEDIUM
GREEN";TAB(15);"11 DARK YELLOW"
670 PRINT "4 LIGHT
GREEN";TAB(15);"12 LIGHT YELLOW"
680 PRINT "5 DARK BLUE";TAB(15);"13
DARK GREEN"
690 PRINT "6 LIGHT
BLUE";TAB(15);"14 MAGENTA"
700 PRINT "7 DARK RED";TAB(15);"15
GREY"
710 PRINT "8 CYAN";TAB(15);"16
WHITE"
720 PRINT::
730 FOR I=0 TO MOD-1
735 CLS(I)=I+2
736 CODE=CODE+8
737 CRS(I)=CODE
740 PRINT "CHARACTER CODE: ";I;
742 INPUT A$(I)
745 PRINT "BACKGROUND COLOR: ";I;
746 INPUT BKG(I)
748 PRINT "FOREGROUND COLOR: ";I;
749 INPUT FRG(I)
770 NEXT I
780 CALL CLEAR
785 CALL SCREEN(16)
800 FOR ROW=1 TO 24
810 FOR COL=1 TO 32
820 ANS=ROW*COL
830
R=INT((ANS/MOD-INT(ANS/MOD))*MOD+.5
)
840 CALL HCHAR(ROW,COL,CRS(R))
845 CALL CHAR(CRS(R),A$(R))
848 CALL
COLOR(CLS(R),FRG(R),BKG(R))
860 NEXT COL
870 NEXT ROW
910 GO TO 910
```



"Son, I realize we have a hard, outer shell, but you can tell your friend, Billy, that we're ROBOTS, *not crustaceans!"*

1-800-272-1600

CALL OR WRITE TODAY!

CALL AND ASK ABOUT OUR EXTENSIVE INVENTORY!

...to keep your Hardware on the "FAS·TRACK"

KANGAROO DISKS 10 for $18.95 | 100 for $127.00

IBM

VERSAFORM	$248.95
EXEC. ACCT. SYSTEM	488.95
2810	64.95
D BASE II	419.95
FRIDAY	199.95
VISICALC 256K	164.95
VISIDEX	164.95
VISIWORD	268.95
VISISPELL	149.95
T.I.M. III	339.95
1-2-3	328.95
CROSSTALK	129.95
HOME ACCT. PLUS	64.95
PFS: FILE	64.95
PFS: GRAPH	64.95
PSF: REPORT	64.95
PFS: WRITER	64.95
PC TUTOR	64.95

ATARI ON DISK

DEADLINE OR WITNESS	$33.95
STARCROSS	26.95
COSMIC BALANCE I OR II	EA. 26.95
ZORK I, II, OR III	EA. 26.95
SUSPENDED	33.95
ZAXXON	26.95
CASTLE WOLFENSTEIN	19.95
DAVID'S MIDNIGHT MAGIC	22.95
MASTER TYPE	26.95
CHOPLIFTER	22.95
SERPENTINE	22.95
CANYON CLIMBER	19.95
SARGON II	22.95
FROGGER	22.95
JAW BREAKER	19.95
CROSSFIRE	19.95
SNOOPER TROOPS 1 OR 2	EA. 26.95
STORY MACHINE	22.95
FACE MAKER	22.95
KNIGHT OF THE DESERT	26.95
BANK STREET WRITER	44.95
HOME ACCOUNTANT	47.95

APPLE

DEADLINE OR WITNESS	$33.95
CREATURE CREATOR	27.95
DUNZHIN	27.95
SAMMY LIGHTFOOT	26.95
STARCROSS	26.95
COSMIC BALANCE I OR II	EA. 26.95
ZORK I, II, OR III	EA. 26.95
SUSPENDED	33.95
WIZARDRY	33.95
KNIGHT OF DIAMONDS	22.95
ZAXXON	26.95
GERMANY 1985	38.95
ARCADE MACHINE	39.95
SARGON II	22.95
PFS: FILE	64.95
PFS: REPORT	64.95
PFS: GRAPH	64.95
MINER 2049 ER	26.95
POLICE ARTIST	26.95
STICKY BEAR BOP	26.95
STICKY BEAR NUMBERS	26.95
STICKY BEAR ABC	26.95

APPLE

DOUBLE TAKE	$ 22.95
BANK STREET WRITER	44.95
ZOOM GRAFIX	32.95
SENSIBLE SPELLER	76.95
SCREEN WRITER II	91.95
SCREEN WRITER PRO.	128.95
THE DICTIONARY	64.95
MAGIC WINDOW II	64.95
VERSAFORM	238.95
HOME ACCOUNTANT	47.95
THE GENERAL MANAGER II	148.95
VISICALC 3.3	164.95
VISITRENDIPLOT	196.95
DESKTOP PLAN II	164.95
KNOW YOUR APPLE IIE	19.95
PASCAL TUTOR	91.95
PASCAL PROGRAMMER	188.95
D. JONES MARKET ANALYZER	289.95
MAGICIII III	489.95
LIST HANDLER	68.95
WORD HANDLER	128.95
EXEC. BRIEFING SYSTEM	124.95

FAS·TRACK COMPUTER PRODUCTS

Box 456 • Columbus, Ohio 43216 • 24-HOUR PHONE ORDERS (614) 863-1699

Personal checks allow 2 weeks. We accept Visa & MasterCard (send card no. & expiration date). Include $2.00 for shipping. Ohio residents add 5½% state sales tax. Prices reflect a cash discount only & are subject to change without notice. Please enclose your phone no. with your order.

CIRCLE 161 ON READER SERVICE CARD

ACEWriter II
Sophisticated word processing that's easy to learn

ACECalc
VisiCalc®-compatible spreadsheet analysis program with 80 columns of variable width

ACE Display card
Opens video display to a full 80 columns by 24 lines

ACE 80 CPU card
Allows you to run CP/M and Apple® II programs

ACE Dual Interface card
Allows you to connect to local and remote printers, terminals, computers and other accessories

Apple II compatible
64K of RAM
Ulc Upper & lowercase

Typewriter-style keyboard

12-key numeric pad

VisiCalc keys

50-watt power supply

Built-in fan

1982

Apple II compatible
64K of RAM
Ulc Upper & lowercase

Typewriter-style keyboard

12-key numeric pad

VisiCalc keys

50-watt power supply

Built-in fan

1983

Good. Better.

And you thought Franklin was good before.

Well, look at Franklin now. You'll find our ACE product line has grown . . . and grown. To include sophisticated word processing. Sensational spreadsheet analysis. And an array of peripheral boards. So you can expand the capabilities of your ACE 1000 as your business needs increase. Our product line's not the only thing that's grown. Franklin now has more than 1,000 authorized dealers throughout the country. So, if you thought we were good before, come see us now.

Apple is a registered trademark of Apple Computer Inc.
VisiCalc is a registered trademark of Visi Corp.

FRANKLIN
COMPUTER CORPORATION
Better than ever.

2128 Route 38; Cherry Hill, NJ 08002 Telephone: 609-482-5900; Telex: 837-385

CIRCLE 164 ON READER SERVICE CARD

Communicating In Code

Wolfger Schneider

Data and command entry to computers via a typical keyboard is a relatively easy task for those of us who have no physical handicaps. But consider the plight of the upper limb amputee trying to type shift or control keys using the traditional mouthstick. Or how about a quadriplegic just trying to move any key with remnant head motion or vestigial finger or toe motion. Many of these individuals are currently denied access to computers because of the lack of a suitable data entry technique.

The Serial Code Keyboard under development at the Applied Physics Laboratory of the Johns Hopkins University for the Veterans Administration is a low-cost, reliable, and relatively easy method of data entry. It requires only the capability to move a spring-centered three-position switch to either extreme position.

These two extreme positions are sensed as simple switch closures and stimulate the generation of two easily distinguishable tone sequences. Modulation of these tone sequences by appropriate movement of the switch can be used to generate an easily learned pseudo Morse Code. These serial tone encoded sequences can then be translated to corresponding ASCII codes to duplicate the function of the standard keyboard.

Assuming the availability of an appropriate three-position switch, the Serial Code Keyboard functions can be implemented in either a separate firmware module (Figure 1) that logically ORs the standard keyboard produced ASCII with the Serial Code Keyboard produced ASCII or they could be implemented in appropriately linked software executing on a personal computer.

Figure 1. The center device is a Morse keyer mounted to be operated with up and down chin motion. It will drive both of the firmware implementations of the Serial Code Keyboard shown. The unit on the left is an Apple specific card which will operate from any I/O slot and sits electrically between the keyboard and the CPU board. The unit in the right is designed to operate with any dumb RS-232 type terminal.

The firmware approach is advantageous for proprietary software packages that allow no linking with other software. The software approach for the Apple Computer described in this article provides a good familiarization with the Serial Code Keyboard approach to data entry and can be successfully used with most Applesoft programs.

The Electro-Mechanical Interface

To exercise the Serial Code Keyboard software, a three-position switch arrangement suitable to the individual handicap must be constructed. It is important to arrive at a switch-lever arrangement that takes into account the handicapped user's stroke length, stroke trajectory, stroke force levels, and stroke positioning accuracy capabilities. In some situations, a standard Morse keyer suitably mounted, may serve as an appropriate three-position switch (Figure 1).

Electrically, the two switch contacts are interfaced to the Apple computer via the game port as shown in Figure 2 using the same bit inputs used by the game paddle pushbuttons. This electrical connection is of opposite polarity to that used by the pushbuttons on the game paddles. The switch connected to PB0 will produce a sequence of high frequency "dits" for as long as the switch is

Wolfger Schneider, 5148 Celestial Way, Columbia, MD 21044.

SANYO MONITOR SALE!!

9" Data Monitor

- 80 Columns × 24 lines
- Green text display
- East to read - no eye strain
- Up front brightness control
- High resolution graphics
- Quick start - no preheating
- Regulated power supply
- Attractive metal cabinet
- UL and FCC approved

- *15 Day Free Trial - 90 Day Immediate Replacement Warranty*

9" Screen - Green Text Display	**$ 79.00**
12" Screen - Green Text Display (anti-reflective screen)	**$ 99.00**
12" Screen - Amber Text Display (anti-reflective screen)	**$119.00**

Display Monitors From Sanyo

With the need for computing power growing every day, Sanyo has stepped in to meet the demand with a whole new line of low cost, high quality data monitors. Designed for commercial and personal computer use. All models come with an array of features, including up-front brightness and contrast controls. The capacity 5 × 7 dot characters as the input is 24 lines of characters with up to 80 characters per line.

Equally important, all are built with Sanyo's commitment to technological excellence. In the world of Audio/Video, Sanyo is synonymous with reliability and performance. And Sanyo quality is reflected in our reputation. Unlike some suppliers, Sanyo designs, manufactures and tests virtually all the parts that go into our products, from cameras to stereos. That's an assurance not everybody can give you!

SANYO

Official Video Products of the Los Angeles 1984 Olympics

• LOWEST PRICES • 15 DAY FREE TRIAL • 90 DAY FREE REPLACEMENT WARRANTY
• BEST SERVICE IN U.S.A. • ONE DAY EXPRESS MAIL • OVER 500 PROGRAMS • FREE CATALOGS

Add $10.00 for shipping, handling and insurance. Illinois residents please add 6% tax. Add $20.00 for CANADA, PUERTO RICO, HAWAII orders. WE DO NOT EXPORT TO OTHER COUNTRIES.

Enclose Cashiers Check, Money Order or Personal Check. Allow 14 days for delivery, 2 to 7 days for phone orders, 1 day express mail! Canada orders must be in U.S. dollars. Visa - MasterCard - C.O.D.

PROTECTO
ENTERPRIZES (WE LOVE OUR CUSTOMERS)
BOX 550, BARRINGTON, ILLINOIS 60010
Phone 312/382-5244 to order
CIRCLE 208 ON READER SERVICE CARD

closed. Similarly, PB1 will produce a sequence of low frequency "dahs".

Operation Of The Serial Code Keyboard

To type a character with the Serial Code Keyboard, the user must move the switch so as to generate the tone sequence corresponding to the desired character. For example, **-- will generate the letter Z, when * is used to represent the higher tone (dit) and - to represent the lower tone (dah). A key position-tone correspondence time diagram is shown in Figure 3.

It should be noted that dit and dah sounds are of equal duration and that the sound-on time equals the sound-off time. This departs from the traditional Morse Code which does not frequency encode dits and dahs and requires dahs to last three times as long as dits. Since we are not using time duration modulation, it is more efficient to make dits and dahs of equal duration. The end of character is recognized by no transmission for a time equal to more than two dah durations.

The serial code correspondence with printable, nonprintable, and mode keys are shown in Table 1. For historic reasons and for code efficiency reasons, the International Morse Code definitions for alphabetic, numeric, and punctuation keys were retained. New definitions had to be made for the space, backspace, linefeed, escape, and enter keys.

In addition to the standard keyboard mode, four keyboard modes are defined by first generating the serial code for the desired mode followed by the alphabetic or numeric modifier.

The shift mode allows the shift codes to be generated and the control mode allows the control codes to be generated.

The repeat mode repeatedly generates at a reasonable rate the code for the selected character until either switch is momentarily closed. A short high frequency tone indicates termination of the repeat mode.

The sequence mode allows predefined ASCII code sequences to be called up. For example, sequence-C generates code for CATALOG-(RETURN) to list the catalog of disk files.

Serial codes not defined in any of the keyboard modes are identified by a short high frequency tone being issued and no code being generated.

Continuous backspacing occurs when generating more than seven dahs, after which every new dah results in a backspace. Similarly, continuous "retype" occurs when more then seven dits are generated. Cursor movement can be done by using escape I, J, K, or M just as with the regular keyboard but is better defined as a repeating sequence.



Figure 2. Electrical connection of the three-position switch is easily achieved via the Apple game I/O socket. A 16-pin DIP connector should be hooked up as shown.



Figure 3. A switch position-sound correspondence timing diagram shows what sounds are produced by a certain switch motion and how the sounds generate Morse code. Note that precise timing of the sound intervals is not required of the operator and that reasonable timing uncertainties are allowable between the start of a high or low tone and its opposite.

A *-	N -*	1 *----	SPACE	**--
B -***	O ---	2 **---	BACK	----
C -*-*	P *--*	3 ***--	LINE	*-*-
D -**	Q --*-	4 ****-	ENTER	---*
E *	R *-*	5 *****		
F **-*	S ***	6 -****	SHIFT	-------
G --*	T -	7 --***	CTRL	*******
H ****	U **-	8 ---**	REPT	----**
I **	V ***-	9 ----*	SEQ	***---
J *---	W *--	0 -----	ESC	**----
K -*-	X -**-			
L *-**	Y -*--	: ---***	, --**--	
M --	Z --**	; -*-*-*	. *-*-*-	
		- *****-	/ ****-_	

Table 1. This Morse code table taken from the Morse tutor program shows the code assignments for alphanumeric and punctuation keys, special code assignments for cursor control and mode control keys were made as shown. Punctuation and graphic keys requiring the shift key on the standard keyboard will require the shift mode code to precede the code of the desired key that shares its location.

Software

The software provided in this article to present the Serial Code Keyboard concept, consists of three files.

The Hello file loads and links the binary machine code file which implements the Serial Code Keyboard functions. It also modifies the machine code to allow operation with the pushbuttons on the game paddles (line 200) for immediate trial use. The option of Morse Code tutorial is also provided.

The tutorial file is an Applesoft program which briefly explains how to drive the Serial Code Keyboard software. It also offers speed selection for code practice and provides a split screen for practicing the code. The upper part of the screen displays lowercase and mode code correspondences. The lower part of the screen is a scrolling screen which shows the characters being generated.

80 COLUMN PRINTER SALE—$149.00*

COM-STAR T/F

Tractor
Friction
Printer

only **$219**

(Parallel or Serial)

• Lowest price quality tractor friction printer in the U.S.A. • Fast 80 characters per second
• 40, 46, 66, 80, 96, or 132 characters per line spacing • Prints labels, letters, graphs, and tables
• List your programs • Print out data from modem services

*STX-80 COLUMN PRINTER—$149.00

Prints full 80 columns. Super silent operation, 60 CPS, prints Hi-resolution graphics and block graphics, expanded character set, exceptionally clear characters, fantastic print quality, uses inexpensive thermal roll paper!

DELUXE COMSTAR T/F PRINTER—$219.00

The Comstar T/F is an excellent addition to any micro-computer system. (Interfaces are available for Apple, VIC-20, Commodore-64, Pet, Atari 400 and 800, and Hewlett Packard). At only $219 the Comstar gives you print quality and features found only on printers costing twice as much. Compare these features.

• **BI-DIRECTIONAL PRINTING** with a **LOGIC SEEKING CARRIAGE CONTROL** for higher through-put in actual text printing. 80 characters per second.

• **PRINTING VERSATILITY:** standard 96 ASCII character set plus block graphics and international scripts. An EPROM character generator includes up to 224 characters.

• **INTERFACE FLEXIBILITY:** Centronics is standard. Options include EIA RS232C, 20mA Current Loop.

• **LONG LIFE PRINT HEAD:** 100 million character life expectancy.

• **THREE SELECTABLE LINE SPACINGS:** 6, 8 or 12 lines per inch.

• **THREE SELECTABLE CHARACTER PITCHES:** • 10, 12 or 16.5 characters per inch. 132 columns maximum. Double-width font also is standard for each character pitch.

• **PROGRAMMABLE LINE FEED:** programmable length from 1/144 to 255/144 inches.

• **VERTICAL FORMAT CONTROL:** programmable form length up to 127 lines, useful for short or over-sized preprinted forms.

• **FRICTION AND TRACTOR FEED:** will accept single sheet paper.

• **224 TOTAL CHARACTERS**

• **USES STANDARD SIZE PAPER**

If you want more fry —

Premium Quality COMSTAR T/F SUPER-10X PRINTER—$299.00 More Features Than RX-80

For $299 you get all of the features of the Comstar T/F plus 10" carriage 120 cps, 9 x 9 dot matrix with double strike capability for 18 x 18 dot matrix. High resolution bit image (120 x 144 dot matrix), underlining, backspacing, left and right margin settings, true lower descenders, with super and subscripts, and prints standard, Italic, Block Graphics, special characters, plus 2K of user definable characters. For the ultimate in price performance the Comstar T/F Super 10" leads the pack!

Double Immediate Replacement Warranty

We have doubled the normal 90 day warranty to 180 days. Therefore if your printer fails within "180 days" from the date of purchase you simply send your printer to us via United Parcel Service, prepaid. We will IMMEDIATELY send you a replacement printer at no charge via United Parcel Service, prepaid. This warranty, once again, proves that WE LOVE OUR CUSTOMERS!

15 DAY FREE TRIAL

OTHER OPTIONS

Extra Ribbons	$ 5.95
Roll Paper Holder	32.95
Roll Paper	4.95
5000 Labels	19.95
1100 Sheets Fan Fold Paper	13.95

Add $17.50 shipping, handling and insurance Illinois residents please add 6% tax. Add $40.00 for CANADA, PUERTO RICO, HAWAII, ALASKA orders. WE DO NOT EXPORT TO OTHER COUNTRIES. Enclose cashiers check, money order or personal check. Allow 14 days for delivery. 2 to 7 days for phone orders. 1 day express mail available!! Canada orders must be in U.S. dollars

PROTECTO

ENTERPRIZES (WE LOVE OUR CUSTOMERS)

BOX 550, BARRINGTON, ILLINOIS 60010
Phone 312/382-5244 to order

SUPER-10" ABCDEFGHIJKLMNOPQRSTUVWXYZ
ABCDEFGHIJKLMNOPQRSTUVWXYZ 1234567890

GRAFSTAR (Apple interface card - "Like Grappler Plus") SALE $69.00.

CIRCLE 210 ON READER SERVICE CARD

The Challenge:
Match Wits with the Mind Games from Brøderbund!

OPERATION WHIRLWIND™

MATCHBOXES™

Put your concentration against another player or the computer. Here's a puzzle game that will keep the whole family bemused, befuddled and playing happily for hours. A grid of 36 numbered boxes conceals an animated menagerie of colorful characters, creatures and objects. The object of the game is to match identical squares and then solve a hidden word puzzle. There are many game variations with puzzles that are frontward, backward, or scrambled. Matchboxes. It's the most memorable memory game you've ever played! Available on disk and cassette.

OPERATION WHIRLWIND AND MATCHBOXES FOR THE ATARI® HOME COMPUTERS. ATARI® is a trademark of Atari, Inc.

Make sure to look for The Arcade Machine™ and Brøderbund's new game phenomenon, Lode Runner™—also for Atari.

Brøderbund Software

Discover the Difference

17 Paul Drive San Rafael, CA 94903

CIRCLE 118 ON READER SERVICE CARD

Serial Code Keyboard, continued...

An exit from the tutorial to the interpreter is provided so that some of the predefined sequences can be executed.

The binary machine code file assumes a 48K Apple and is loaded below the DOS starting at location $9200. The code is linked with DOS and becomes the input device until disconnected, by a reset for example. HIMEM has been reset to protect the machine code during Applesoft program generation.

A few predefined sequences exist to help the user and to illustrate the sequence mode:

G to greet your guests
H to run the Hello file
M to exit to the monitor
C to present the files in the catalog
S to clear the whole screen
B to sound the alarm
U to move the cursor up repeatedly
D to move the cursor down repeatedly
L to move the cursor left repeatedly
R to move the cursor right repeatedly

Summary

The Serial Code Keyboard is presented here to provide potential users with the opportunity of trying it out to see if it provides a reasonable approach of data and command entry. Firmware implementations of the Serial Code Keyboard have been developed for the Apple computer and for "dumb" RS-232-type terminals by the Applied Physics Laboratory of the Johns Hopkins University. These units are currently being evaluated in several rehabilitation centers throughout the United States and Canada. If these evaluations are positive, the units may soon be in commercial production.

Listing 1.

```
.........................
*  SERIAL CODE KEYBOARD  *
*         HELLO          *
*           BY           *
*    WOLFGER SCHNEIDER   *
*************************

10  HOME
20  VTAB 3
30  PRINT "THE SERIAL CODE KEYBOARD WILL ALLOW"
40  PRINT "A HORSE-TYPE PADDLE INTERFACED TO THE"
50  PRINT "GAME PADDLE INPUTS TO SERVE AS A"
60  PRINT "SECOND KEYBOARD FOR HANDICAPPED USE "
70  PRINT "THIS PROGRAM WILL BE ERASED BY THE"
80  PRINT "EXECUTION OF SOME SOFTWARE PACKAGES "
90  PRINT "IT IS THEREFORE BEST USED AS A TRAINER "
100  PRINT " "
110  PRINT "FOR COMMENTS REGARDING THIS PROGRAM"
120  PRINT "WRITE TO"
130  PRINT "       WOLFGER SCHNEIDER"
140  PRINT "       5148 CELESTIAL WAY"
150  PRINT "       COLUMBIA,MO  21064"
160  VTAB 23
170  PRINT "(THIS SOFTWARE IS IN THE PUBLIC DOMAIN)"
180  PRINT  CHR$ (4) "BLOAD MORSE OBJ"
190  REM  THE FOLLOWING LINE MODIFIES THE CODE TO ALLOW GAME PADDLE USAGE

200  POKE 37495,48  POKE 37500,48  POKE 37503,14  POKE 37571,14  POKE 375
     79,14
210  VTAB 14
220  PRINT "PRESS MORSE KEY TO MAKE SELECTION"
230  PRINT "INDICATED "
240  VTAB 19
250  PRINT "  DO YOU WISH TO EXIT?"
260  PRINT "  DO YOU WISH THE SERIAL CODE KEYBOARD?"
270  PRINT "  DO YOU WISH THE MORSE TUTOR?"
```

COMPUTER GAMES
40% BELOW RETAIL FOR:
APPLE, ATARI, & COMMODORE 64
CHOOSE FROM THESE MAJOR COMPANIES:

ADVENTURE INTERNATIONAL		EPYX	
PREPPIE II	20.97	TEMPLE OF APSHAI	23.97
STONE OF SISYPHUS	20.97	OIL BARONS	60.00
SAGA SERIES	23.97	HELLFIRE WARRIOR	23.97
AVALON HILL		SCREEN PLAY	
TAC	24.00	WYLDE	23.97
TELENGARD	16.80	ZIGGURAT	23.97
PARIS IN DANGER	21.00	DUNZHIN	23.97
STRATEGIC SIMULATIONS		EDU-WARE	
RINGSIDE SEAT	23.97	INTERSTELLAR SHARKS	19.77
EAGLES	23.97	PRISONER II	19.77
BROADSIDES	23.97	WORLD BUILDERS	19.77
GEOPOLITIQUE 1990	35.97		

HUNDREDS OF MORE TITLES IN STOCK
1-800-331-9131

FOR FREE INFORMATION AND PRODUCT LISTING, COMPLETE AND MAIL THIS FORM TO:
MARCO POLO, 4681 S. 83rd E. Ave., Tulsa, OK 74145
(Check which one) ☐ APPLE ☐ ATARI ☐ COMMODORE 64
NAME
ADDRESS
CITY
STATE ZIP
All Orders Prepaid By Personal Check, Money Order, Cashier Check, Visa or MasterCard. Please Add $5.00 Shipping and No Credit Card Charges or Personal Checks Add 4% - Oklahoma Residents Add 5% Sales Tax

CIRCLE 184 ON READER SERVICE CARD

30% OFF
— ON NAME BRAND SOFTWARE! THOUSANDS OF TOP SELLING TITLES AT A FLAT 30% DISCOUNT FROM REGULAR RETAIL PRICES.

- *ASHTON-TATE*
- *BEAGLE BROS*
- *BRODER BUND*
- *DATA MOST*
- *DATA SOFT*
- *INFOCOM*
- *MICROSOFT*
- *MUSE*
- *NAVIC*
- *PEACHTREE*
- *PENGUIN*
- *PERFECT*
- *SIERRA*
- *SIRIUS*
- *STONEWARE*
- *VISICORP*

— PLUS DOZENS OF OTHER MAJOR PUBLISHERS. WE HAVE ALL THE NEWEST BUSINESS AND RECREATIONAL PROGRAMS.

ORDER TOLL-FREE
WITH VISA OR MASTER CARD
800-327-2133
(305-845-6186 IN FLORIDA)

KAYDAN
DISCOUNT SOFTWARE
NORTH PALM BEACH, FLORIDA 33408

CIRCLE 193 ON READER SERVICE CARD

Announcing the Encore™ diskette.

The way it performs, you'd never guess it costs only $1.59.*

Here's your best value in diskettes today.

New Encore meets the same high standards that big-name brands meet–100% error-free performance, ANSI certification. In many cases it actually exceeds system requirements. There's even a 1-year replacement guarantee.

Yet the cost is as low as $1.59 for single-sided, single-density 5¼" Encore diskettes (when you purchase four or more boxes, ten diskettes per box).

And only $2.99 for double-sided, double-density 5¼" Encore diskettes.

With important savings comes reliable performance on all popular systems: Apple II, IIPlus, IIe, IIi; IBM PC, Radio Shack TRS-80, DEC, Wangwriter and many others. So from now on, get accurate, reliable performance without the high cost. Get Encore.

Send coupon today. Or call
1 (800) 547-5444.
In California 1 (800) 547-5447.

To ensure your complete satisfaction, Encore diskettes are covered by a 45-day risk-free trial period. Allow two weeks for delivery. This offer good only in the Continental U.S. Call for information on system compatibility.

FREE Inmac Floppy Library Case!

Order your Encore diskettes within the next 30 days, and with each box you'll receive a free Floppy Library Case for easy storage, fast retrieval, and sure protection of your data. But hurry – supplies are limited (Limit 4 per order)

inmac
World's leading source of computer supplies and accessories.



*Price for one SSSD 5¼" Encore diskette when purchasing 40 or more diskettes.

ORDER NOW

Inmac, Encore Introductory Offer 2465 Augustine Dr. Santa Clara, CA 95051
Yes, I think Encore's sounds like a great deal! Please send me

No. of boxes	Order No. / Description	1	2-3	4+
	7970 – 5¼" SSSD soft sector	$25.90 (2.59 ea)	$19.90 (1.99 ea)	$15.90 (1.58 ea)
	7971 – 5¼" DSDD soft sector	$43.90 (4.39 ea)	$35.90 (3.58 ea)	$29.90 (2.99 ea)
	7960 – 8" SSDD soft sector	$39.90 (3.99 ea)	$29.90 (2.99 ea)	$26.90 (2.69 ea)
	7961 – 8" SSSD soft sector	$32.90 (3.29 ea)	$24.90 (1.99 ea)	$19.90 (1.99 ea)
	IBM format 2306830	Subtotal		
		Sales Tax*		
*Customers in CA, CO, DC, NJ, NY, TX, IL, GA: add applicable tax		Total Order		

☐ Check enclosed ☐ Bill Company P.O. No. _____
☐ Visa ☐ MasterCard Account No. _____
Signature _____
Name _____ Phone _____
Firm _____
Address _____
City _____ State _____ Zip _____
☐ Please send me a free Inmac catalog. 114121

CIRCLE 167 ON READER SERVICE CARD

Serial Code Keyboard, continued...

```
300  GOTO 320
310  HIMEM  37375
320  HOME : POKE 56,9 : POKE 57,146 : CALL 1002
330  END
340  I = 0
350  HTAB 1: VTAB (19 + I)
360  INVERSE : PRINT " ";: NORMAL
370  J = 0
380  IF ( PEEK (49249) ) 127 OR  PEEK (49350) ) 127 OR  PEEK (49153) ) 12
     7) GOTO 430
390  J = J + 1
400  IF J < 50 GOTO 360
410  I = I + 1
420  IF I < 3 GOTO 330
430  GOTO 320
440  ON I + 1 GOTO 480,390,440
450  HIMEM  37375
460  POKE 56,9 : POKE 57,146 : CALL 1002
470  PRINT ""
480  PRINT  CHR$ (4);"RUN MORSE TUTOR F"
490  HOME : END
```

Listing 2.

```
**************************
* SERIAL CODE KEYBOARD   *
*      MORSE TUTOR       *
*            BY          *
*   WOLFGER SCHNEIDER    *
**************************

 10  GOTO 240
 20  HOME
 30  POKE 34,18
 40  PRINT " "
 50  PRINT " A  *-      N  -*      1  *----   SPACE    **--"
 60  PRINT " B  -***    O  ---     2  **---   BACK     ----"
 70  PRINT " C  -*-*    P  *--*    3  ***--   LINE     *-*-"
 80  PRINT " D  -**     Q  --*-    4  ****-   ENTER    ---*"
 90  PRINT " E  *       R  *-*     5  *****
100  PRINT " F  **-*    S  ***     6  -****   SHIFT    ------"
110  PRINT " G  --*     T  -       7  --***   CTRL     *****"
120  PRINT " H  ****    U  **-     8  ---**   REPT     -----**"
130  PRINT " I  **      V  ***-    9  ----*   SEQ      ***---"
140  PRINT " J  *---    W  *--     0  -----   ESC      **----"
150  PRINT " K  -*-     X  -**-"
160  PRINT " L  *-**    Y  -*--    ,  --***   .  --**--"
170  PRINT " M  --      Z  --**    ;  -*-*-*  :  ***---"
180  PRINT "                       -  *****-  /  *****-"
190  PRINT " ": PRINT " "
200  PRINT "----------------------------------------"
210  PRINT " % (SHIFT-5)  TERMINATES THE PRACTICE"
220  GET A$: PRINT A$;
230  IF  ASC (A$) = 37 GOTO 350
240  GOTO 220
350  POKE 34,00 : HOME : END
360  HOME
370  PRINT "THE SERIAL CODE KEYBOARD DUPLICATES THE"
380  PRINT "REGULAR APPLE KEYBOARD BY TRANSLATING"
390  PRINT "APPROPRIATE MORSE CODES TO CORRESPONDING"
400  VTAB 4
410  PRINT "APPLE KEYBOARD CODES  FOR EXAMPLE "
420  PRINT "      A-  WILL GENERATE 'A'"
430  PRINT "    * IS THE HIGHER TONE (DIT)"
440  PRINT "    - IS THE LOWER TONE (DAH)"
450  PRINT "THE USER WILL GENERATE DIT SEQUENCES"
460  PRINT "BY PRESSING THE MORSE KEY ONE WAY AND"
470  PRINT "DAH SEQUENCES BY PRESSING THE KEY THE"
480  PRINT "OTHER WAY.  THE SOUND ON-TIME EQUALS THE"
490  PRINT "SOUND OFF-TIME.  THE USER CAN GENERATE"
500  PRINT "THE APPROPRIATE DIT/DAH SEQUENCES BY"
510  PRINT "LISTENING TO THE TONES AND MOVING"
520  PRINT "THE KEY SO AS TO GENERATE THE DESIRED"
530  PRINT "TONE SEQUENCES.  RESTING THE KEY IN THE"
540  PRINT "CENTER POSITION (SOUND OFF) FOR TWO"
550  PRINT "DIT/DAH TIME INTERVALS, SIGNIFIES THE"
560  PRINT "END OF CHARACTER.  IF THE MORSE CODE IS"
570  PRINT "VALID, IT WILL BE TRANSLATED AND"
580  PRINT " DISPLAYED, ELSE A SHORT AND HIGH BEEP"
590  PRINT "WILL SOUND."
600  PRINT ""
610  PRINT "    ** FOR MORE, PRESS THE MORSE KEY **";
620  IF ( PEEK (49349) ) 127 OR  PEEK (49350) ) 127 OR  PEEK (49153) ) 12
     7) GOTO 540
630  GOTO 520
640  POKE 49168,0 : HOME : VTAB (3)
650  PRINT "* SHIFTED CHARACTERS ARE DISPLAYED BY"
660  PRINT "  FIRST ENTERING THE SHIFT MODE,
670  PRINT "  (------) FOLLOWED BY THE LOWER CASE"
680  PRINT "  CHARACTER  FOR EXAMPLE, SHIFT-I"
690  PRINT "  WILL DISPLAY 'I', AFTER WHICH NORMAL"
700  PRINT "  MODE IS REENTERED."
710  PRINT "* CONTROL CHARACTERS ARE DISPLAYED BY"
```

a.d. 2082.
Diskettes duplicated by Allenbach in 1983 will still be guaranteed.

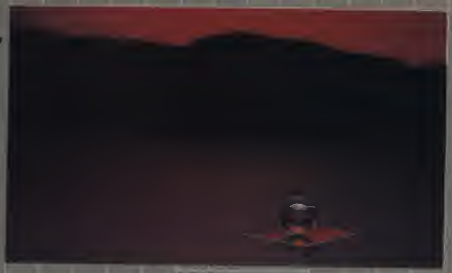

This Lifetime Guarantee, exclusive to Allenbach, adds quality and consumer confidence to your software products. While this alone is reason enough to let Allenbach handle your software duplication, most software developers initially choose us for convenience. We can probably complete your production faster than you can. Additionally, your whole project can become one-easy-step by having us perform all packaging requirements from printing to assembly.

You'll also appreciate the high standard of excellence demanded by Allenbach. Software duplication for practically any format is our primary business. We've established a team of professional technicians who specialize in all phases of software duplication. Your software is effectively reproduced on specially designed precision duplicating equipment. Also used are exacting verification methods unique in the industry to guarantee 100% accuracy. Plus your software will be duplicated onto the Allenbach diskette, the OEM diskette that is Guaranteed for Life.





ALLENBACH

CIRCLE 108 ON READER SERVICE CARD

Allenbach *really* is the logical solution for your software duplicating needs. So feel free to call us with your questions. Take advantage of our years of experience and knowledge. Have Allenbach do what we do best, so you can do what you do best

2101 Las Palmas
Carlsbad, California 92008
619-438-2258
800-854-1515 (Toll Free)
Telex 19-4561 LSA

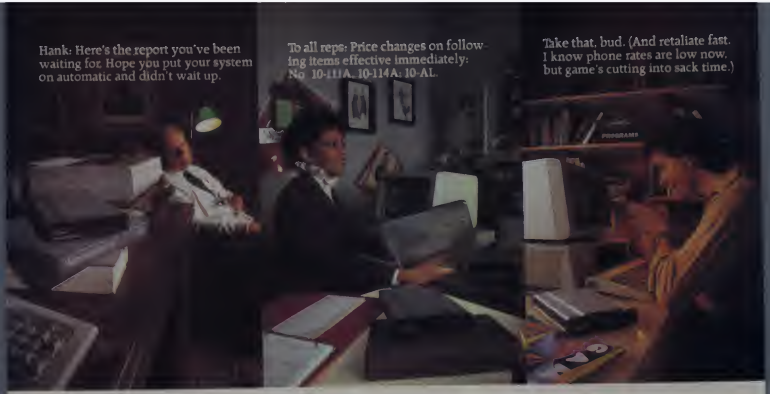
Hank: Here's the report you've been waiting for. Hope you put your system on automatic and didn't wait up.
To all reps: Price changes on following items effective immediately: No. 10-111A, 10-114A, 10-AL.
Take that, bud. (And retaliate fast. I know phone rates are low now, but game's cutting into sack time.)
PROGRAMER

Your computer's telephone.

Hayes

Wouldn't it be great if, somehow, you could connect your computer to your accountant's, down the street? To the IBM** PC at the branch office, upstate? Or to your favorite chess challenger, across country?

With a telecomputing system by Hayes, you can.

Quickly. Easily. And for the price of a phone call.

Hayes Smartmodem. Think of it as your computer's telephone. Hayes Smartmodem 300, and the faster Smartmodem 1200, work with any computer with an RS-232 I/O port. They allow you to communicate over ordinary phone lines, all across America.

But any modem will send and receive data.

Smartmodems also dial, answer and disconnect calls. Automatically. Without going through the telephone receiver, making them far superior to acoustic coupler modems.

Choose your speed; choose your price. The lower-priced Smartmodem 300 is ideal for local data swaps and communicates at 300 bps. For longer distance and larger volumes, Smartmodem 1200 communicates at 1200 bps or up to 300 bps, with a built-in selector that automatically detects transmission speeds.

Both work with rotary dials, Touch-Tone* and key-set systems; connect to most timesharing systems; and feature an audio speaker.

Either Smartmodem is a perfect match for many different computers. And if you have an IBM PC, Hayes also provides the perfect communications software.

Smartcom II™ We spent a lot of time developing our software, so you can spend less time using it. Smartcom II prompts you in the simple steps required to create, send, receive, display, list, name and re-name files. It even receives data completely unattended—especially helpful when you're sending work from home to office, or vice versa.

And if you need it, there's always "help." One of several special functions assigned to IBM function keys, this feature explains prompts, messages, etc. to make communicating extra easy.

With Smartcom II, it is. The program remembers communication parameters for 26 different remote systems. Just punch a key, you're all set.

You can treat dial-up and log-on sequences the same way. In fact, Smartcom II comes with codes already set up for four popular information services. COMPUSERVE® DIALOG'S KNOWLEDGE INDEX℠ DOW JONES NEWS/RETRIEVAL® SERVICE, and THE SOURCE℠ AMERICA'S INFORMATION UTILITY.℠ Procedures for obtaining an account with each of the services are included in the Smartcom II manual. But that's not all.

Special offers for Smartcom II owners! Dow Jones News/Retrieval Service has a special introductory offer for Smartcom II owners. By calling a toll-free number, they receive a free password and one free hour of service anytime after 6:01 p.m., local time.

You'll also be entitled to a valuable

Hayes®

Welcome to TELEMAIL! Your last access was Tuesday, Jan. 4, 1983 11:07 a.m.
CHECK these bulletin boards:
TELEMAIL. TELESOFT.

subscription offer for THE SOURCE. Smartcom II owners who subscribe to THE SOURCE will receive one free hour of daytime service.

Like all our products, Smartcom II and both Hayes Smartmodems are backed by excellent

documentation and full support from us to your dealer.

So see him today. Break out of isolation. Get a telephone for your desktop computer.

Hayes Microcomputer Products, Inc., 5923 Peachtree Industrial Blvd., Norcross, GA 30092. 404/449-8791.

Smartcom II ® is a trademark of Hayes Microcomputer Products, Inc.
*TM American Telephone and Telegraph
* *IBM is a registered trademark of International Business Machines Corp.
© 1983 Hayes Microcomputer Products, Inc.
Sold only in the U.S.A.
COMPUSERVE INFORMATION SERVICE is a registered trademark of CompuServe Incorporated an H & R Block Company.
KNOWLEDGE INDEX is a service mark of DIALOG Information Services, Inc.
DOW JONES NEWS/RETRIEVAL is a registered trademark of Dow Jones & Company, Inc.
THE SOURCE and AMERICA'S INFORMATION UTILITY are service marks of Source Telecomputing, a subsidiary of The Reader's Digest Association, Inc.

CIRCLE 172 ON READER SERVICE CARD

Serial Code Keyboard, continued...

```
620  PRINT "  FIRST ENTERING THE CONTROL MODE."
630  PRINT "  (******) FOLLOWED BY THE LOWER CASE"
640  PRINT "  CHARACTER  FOR EXAMPLE, CNTL-G WILL"
650  PRINT "  SOUND THE BELL, AFTER WHICH NORMAL"
660  PRINT "  MODE IS REENTERED "
670  PRINT "* PRE-STORED SEQUENCES CAN BE DISPLAYED"
680  PRINT "  BY FIRST ENTERING SEQUENCE MODE."
690  PRINT "  (***.---) FOLLOWED BY A CORRESPONDING"
700  PRINT "  LOWER CASE CHARACTER  FOR EXAMPLE,"
710  PRINT "  SEQ-G WILL GREET YOUR GUESTS, AFTER"
720  PRINT "  WHICH NORMAL MODE IS REENTERED "
730  PRINT ""  PRINT ""
740  PRINT "  ** FOR MORE, PRESS THE MORSE KEY **";
750  IF ( PEEK (49249) ) 127 OR  PEEK (49250) ) 127 OR  PEEK (49152) ) 12
     7) GOTO 770
760  GOTO 750
770  POKE 49168,0  HOME   VTAB (3)
780  PRINT "* CONTINUOUS CURSOR MOVEMENT TO THE "
790  PRINT "  LEFT AND RIGHT IS ACHIEVED BY GENE-"
800  PRINT "  RATING MORE THAN 7 CONSECUTIVE DIT OR"
810  PRINT "  DAH SEQUENCES RESPECTIVELY "  VTAB 10
820  PRINT "SELECT A PRACTICE SPEED BY PRESSING"
830  PRINT "THE MORSE KEY WHEN THE DESIRED SPEED"
840  PRINT "IS FLASHING "
850  PRINT ""
860  PRINT "            VERY FAST"
870  PRINT "            FAST"
880  PRINT "            MEDIUM"
890  PRINT "            SLOW"
900  I = 0
910  HTAB 9: VTAB (14 + I)
920  INVERSE : PRINT " "; : NORMAL
930  J = 0
940  IF ( PEEK (49249) ) 127 OR  PEEK (49250) ) 127 OR  PEEK (49152) ) 12
     7) GOTO 1010
950  J = J + 1
960  IF J < 30 GOTO 940
970  PRINT  CHR$ (8)." ",
980  I = I + 1
990  IF I < 4 GOTO 910
1000  GOTO 900
1010  POKE 37374,I + 2
1020  POKE 49168,0
1030  VTAB 24
1040  HTAB (1)
1050  PRINT "**TO PRACTICE CODE PRESS THE MORSE KEY**".
1060  IF ( PEEK (49249) ) 127 OR  PEEK (49250) ) 127 OR  PEEK (49152) ) 1
     27) GOTO 10
1070  GOTO 1060
```

Listing 3.

```
SOURCE FILE:  MORSE SRC
0000                    1 ********************************************************
0000                    2 * SERIAL CODE KEYBOARD BY  WOLFGER SCHNEIDER MAY 1982
0000                    3 ********************************************************
0000                    4 *
0000                    5 *EQUATES
C061                    6 OITLINE EQU  $C061
C062                    7 DAHLINL EQU  $C062
C030                    8 SOUND   EQU  $C030
0778                    9 ICHAR   EQU  $0778
FD26                   10 GETKEY  EQU  $FD26
0038                   11 BASL    EQU  $28
004E                   12 RNDL    EQU  $4E
004F                   13 RNDH    EQU  $4F
C000                   14 KBD     EQU  $C000
0080                   15 TONE    EQU  $80
00FE                   16 PTR     EQU  $FE
----- NEXT OBJECT FILE NAME IS MORSE OBJ
9200                   17         ORG  $9200
9200                   18 *VARIABLES
9200 04                19 ELEMTIM DFB  04
9201 00                20 EDITFLG DFB  0
9202 00                21 REPEATF DFB  0
9203 00                22 CNTLFLG DFB  0
9204 00                23 BMFLAG  DFB  0
9205 00                24 SEQFLAG DFB  0
9206 03                25 TCOUNT  DFB  3
9207 01                26 CHWORD  DFB  1
9208 00                27 SEQOFLG DFB  0
9209                   28 *
9209 2C 87 92          29 NITNTRY BIT  IQRTS     V=1 TO MARK INIT ENTRY
                          BVS  SAVREGS
920C 70 01             30                        V=0 TO MARK REG ENTRY
920E B8                31 NRMNTRY CLV
920F 48                32 SAVREGS PHA            SAVE REGS A,X,Y ON STACK
9210 98                33         TYA
9211 48                34         PHA
9212 8A                35         TXA
9213 48                36         PHA
9214 50 1D             37         BVC  SEQCHK
9216 A9 0E             38         LDA  #$0E      WRITE KBWL TO BYPASS NITNTRY
9218 85 38             39         STA  $38
```

WELCOME TO APSHAI. YOU'RE JUST IN TIME FOR LUNCH.

Boy, have you taken a wrong turn. One moment you're gathering treasure and the next you're being eyed like a side of beef.

You're in the Gateway to Apshai.™ The new cartridge version of the Computer Game of the Year,* Temple of Apshai.™

Gateway has eight levels. And over 400 dark, nasty chambers to explore. And because it's joystick controlled, you'll have to move faster than ever.

But first you'll have to consider your strategy. Is it treasure you're after? Or glory? You'll live longer if you're greedy, but slaying monsters racks up a higher score.

The Apshai series is the standard by which all other adventure games are judged. And novices will not survive.

They'll be eaten.

One player, Temple of Apshai, disk/cassette; Gateway to Apshai, cartridge, joystick control.

EPYX COMPUTER SOFTWARE

STRATEGY GAMES FOR THE ACTION-GAME PLAYER.

*Game Manufacturers Association, 1981

CIRCLE 159 ON READER SERVICE CARD

Serial Code Keyboard, continued...

```
931A A9 00      40          LDA  #0          CLEAR FLAGS
931C 8D 01 92   41          STA  EDITFLG
931F 8D 02 92   42          STA  REPEATF
9322 8D 05 92   43          STA  SEOFLAG
9325 8D 08 92   44          STA  SEOOFLG
9328 A9 00      45 BEEPNIT  LDA  #0
932A 8D 03 92   46          STA  CNTLFLG
932D 8D 04 92   47          STA  SHFLAG
9330 20 39 94   48          JSR  BEEP
9333 2C 08 93   49 SEOCHK   BIT  SEDDFLG     IF SEQUENCE DUT
9336 10 37      50          BPL  RPTCHK      REDUESTED,
9338 A0 00      51          LDY  #0          FETCH CHARACTER IN STRING
933A B1 FE      52 SCHGET   LDA  (PTR),Y
933C F0 17      53          BED  SEOEND      IF NULL, DDNE
933E 8D 09 92   54          STA  CHWORD      SAVE CHARACTER
9341 E6 FE      55          INC  PTR         (WON'T WORK ACROSS BOUNDARIES)
9343 C9 FF      56          CMP  #$FF        IF CHARACTER()FF,
9345 F0 18      57          BEQ  SEORPT
9347 A0 20      58          LDY  #$20        DELAY
9349 A2 20      59          LDX  #$20
934B 18         60          CLC
934C 20 23 94   61          JSR  TIMER
934F AD 07 92   62          LDA  CHWORD      RESTORE CHARACTER
9352 4C 73 93   63          JMP  DUTCHS      ELSE OUTPUT CHARACTER
9355 A9 00      64 SEOEND   LDA  #0           SEOFLAG=$EDDFLG=0
9357 8D 05 93   65          STA  SEDFLAG
935A 8D 08 93   66          STA  BEOOFLG
935D F0 48      67          BED  MORBIN0
935F A9 00      68 SEDRPT   LDA  #0           IF CHARACTER=FF
9361 8D 08 92   69          STA  SEDOFLG     SEDFLC=0
9364 8D 05 92   70          STA  SEOFLAG     SEDFLAG=0
9367 CE 03 92   71          DEC  REPEATF     REPEATF=-1
936A B1 FE      72          LDA  (PTR),Y     GET REPEAT CHARACTER
936C 8D 07 92   73          STA  CHWORD      AND SAVE
936F            74 *
936F 2C 01 92   75 RPTCHK   BIT  REPEATF     IF REPEAT FLAG=0
9372 10 3C      76          BPL  EDFCHK      CHECK FOR EDITFLG
9374 2C 41 C0   77          BIT  DITLINE     ELSE,IF KEY NOT DEPRESBED,
9377 10 07      78          BPL  RPTEND
9379 2C 42 C0   79          BIT  DAHLINE
937C 10 02      80          BPL  RPTEND
937E 10 13      81          BMI  BET         REPEAT CHARACTER
9380 20 39 94   82 RPTEND   JSR  BEEP        ELSE,BEEP
9383 A0 20      83          LDY  #$20        AND DELAY TO AVOID BDUNCE
9385 A2 10      84          LDX  #$10
9387 18         85          CLC
9388 20 23 94   86          JSR  TIMER
938B A9 00      87          LDA  #0
938D 8D 01 92   88          STA  REPEATF     REPEAT FLAG=0
9390 F0 15      89          BEO  MORBIN0
9392 A0 20      90 RPT      LDY  #$20        DELAY REPEAT RATE
9394 A2 20      91          LDX  #$20
9396 18         92          CLC
9397 20 23 94   93          JSR  TIMER
939A AD 07 92   94          LDA  CHWORD      AND REPEAT CHARACTER
939D 4C 73 93   95          JMP  OUTCHS
93A0            96 *
93A0 3C 01 92   97 EDFCHK   BIT  EDITFLG     IF EDITFLAG NOT ZERO,
93A3 10 02      98          BPL  MDRBIN0
93A5 30 0A      99          BMI  FOLLOOP     AND LDDK FOR NEXT LINE LD
93A7           100 *
93A7 A9 01     101 MORBIN0 LDA  #01          CHWORD=1
93A9 8D 07 92  102          STA  CHWORD
93AC A9 03     103          LDA  #03         INITIALIZE TCDUNT
93AE 8D 06 92  104          STA  TCDUNT
93B1           105 *
93B1 E6 4E     106 FDLLOOP INC  RNDL        KEEP RND NOS GDING
93B3 D0 03     107          BNE  NN1
93B5 E6 4F     108          INC  RNDH
93B7 AD 00 C0  109 NN1     LDA  KBD         CHECK KBD FOR ENTRY
93BA 10 04     110          BPL  NN2
93BC 18        111          CLC              MARK KEYBOARD SOURCE
93BD 4C 78 93  112          JMP  REBTREG      IF SO, ELSE
93C0 2C 41 C0  113 NN1     BIT  DITLINE     IF DIT LINE LO,
93C3 30 03     114          BMI  EDCA
93C5 4C BB 93  115          JMP  DIT         DO DIT
93C8 2C 42 C0  116 EOCA    BIT  DAHLINE     IF DAH LINE LO,
93CB 30 03     117          BMI  EOC
93CD 4C E3 93  118          JMP  DAH         DD DAH
93D0           119 *
93D0 2C 01 92  120 EDC     BIT  EDITFLG     IF EDITFLG=-1
93D3 10 07     121          BPL  EDCI
93D5 A9 00     122          LDA  #0          CLEAR EDITFLAG
93D7 8D 01 92  123          STA  EDITFLG
93DA F0 CB     124          BED  MDRBIN0
93DC AC 00 92  125 EOCI    LDY  ELEMTIM
93DF A2 80     126          LDX  #TONE       PAUSE ONE ELEMENT TIME
93E1 18        127          CLC
93E2 20 32 94  128          JSR  TIMER
93E5 CE 04 92  129          DEC  TCDUNT      DECREMENT TCDUNT
93E8 D0 C7     130          BNE  FOLLOOP     AND LODK FOR NEXT LINE LD
93EA           131 *
93EA AD 07 92  132          LDA  CHWORD      IF CHWORD STILL =1,I E. NO CHANGE,
93ED C9 01     133          CMP  #01
```


GET THE
DOCUMENTER
A MACRO UTILITY FOR YOUR MICRO

BRANCH FROM	FUNCTION	BRANCH TO
LINE 110	THEN	LINE 120
LINE 110	ELSE	LINE 150
LINE 140	GOSUB	LINE 170

Have your computer produce its own flowchart with **THE DOCUMENTER.** Program logic is graphically displayed to your screen or printer. Uses include flowcharting basic, debugging programs, and a learning aid. Sorted Branch maps are also produced. Particular versions have worked on all "workalike" equipment and operating systems.

If documentation is a problem for you.
BUY THE DOCUMENTER.

All version **$49.95** plus **$2.05** for shipping and handling. (GA res. add 4% sales tax.)

- ☐ Apple II/II+/IIe, APPLEDOS
- ☐ CP/M, Del. on 8 in. SSSD Disk
- ☐ IBM PC, DOS
- ☐ TRS-80 I/III/IV Disk
- ☐ TRS-80 I/III/IV Tape
- ☐ TRS-80 II/12/16

Memory Size _____

Name _____

Address _____

City: _____ ST: _____ Zip _____

☐ Master Charge ☐ Visa

Account No. _____ Expiration

Bank No. _____ Date _____

Signature _____

PSONUT Software
P.O. Box 490, Dept. 103
Lilburn, Georgia 30247 — (404) 469-0056
Dealer Inquiries Invited

CIRCLE 201 ON READER SERVICE CARD

Educational software for your Apple & Atari!

Educators are recognizing and taking advantage of the computer's unique use as a motivational tool. You can, too!

Be a patient teacher . . .
Preparing for the S.A.T. (PDI) $119.95 disk 99.95 cass.

Meteor Multiplication (DLM)
Apple only. 2nd-4th grade speed and accuracy drill 34.00

All About Dinosaurs (Orange Cherry)
1st-4th grade reading comprehension with science interest 34.00 disk 28.00 cass.

Explore an environment . . .
Gertrude's Secrets (The Learning Co.)
Apple only. Preschool-Kindergarten Logical relationships 44.95

Express yourself . . .
The Bank Street Writer (Broderbund)
Jr. High-up word processing 69.50

Complete Graphics System (Penguin)
Apple only. Jr. High-up graphics design 69.95

Develop structured thinking skills . . .
M.I.T. Logo (Krell)
3rd grade-up develop programming skills through geometry 89.95

Have fun . . .
Space Array (Micro Power & Light)
Apple only. 6th grade up solve spatial relationship puzzles 34.95

Pinball Construction Set (Budgeco)
Apple only. 4th grade-up design your own pinball games $39.95

These are just some choices from our catalog of educator reviewed software offerings. Order today and include name & address.

THE DISCOVERY DISK!

9256 Clayton Road
St. Louis, Mo. 63124
(314) 997-0724

Quantity Name Price

Shipping $2.00

Missouri residents add 5.625% sales tax

Total

Bill my: ☐ MasterCard ☐ Visa

Acct no:

Exp. date:

Signature

☐ Please send me your complete catalog.

CIRCLE 138 ON READER SERVICE CARD

Serial Code Keyboard, continued...

```
92EF F0 C0      124          BEQ  POLLOOP    LOOK FOR NEET LINE LO
93F1:           125 *
93F1: C9 7F     126          CMP  #$7F       IF"-------"
93F3 D0 04      127          BNE  EOC3
93F5 CE 04 92   128          DEC  SHFLAG     SHFLAG=-1
93F8 4C A7 92   139          JMP  MORSIN0
93FB            140 *
93FB C9 40      141 EOC3     CMP  #$40       IF"******"
93FD D0 04      142          BNE  EOC4
93FF CE 03 92   143          DEC  CNTLFLG    CNTLFLG=-1
9303 4C A7 92   144          JMP  MORSIN0
9305            145 *
9305 C9 7C      146 EOC4     CMP  #$7C       IF"----**"
9307 D0 06      147          BNE  EOC5
9309 CE 02 92   148          DEC  REPEATF    REPEATF=-1
930C 4C A7 92   149          JMP  MORSIN0
930F            150 *
930F C9 47      151 EOC5     CMP  #$47       IF"***---"
9311 D0 06      152          BNE  EOC6
9313 CE 05 93   153          DEC  BEOFLAG    BEOFLAG=-1
9316 4C A7 93   154          JMP  MORSIN0
9319            155 *
9319 3C 05 91   156 EOC6     BIT  BEOFLAG    IF BEOFLAG=-1
931C 10 03      157          BPL  EOC7
931E 4C 68 93   158          JMP  SEQUENC    DO SEQUENC
9321            159 *
9321 3C 04 92   160 EOC7     BIT  SHFLAG     IF SHFLAG=-1
9324 10 13      161          BPL  EOC8
9326 AE 25 95   162          LDE  SHFTPTR    LOOK FOR VALID CODE
9329 86 FE      163          STE  PTR        IN SHIFTABLE
932B AE 26 95   164          LDE  SHFTPTR+1
932E 86 FF      165          STE  PTR+1
9330 AA         166          TAE
9331 A9 80      167          LDA  #$80       SHFLAG=0
9333 8D 04 92   168          STA  SHFLAG
9336 4C 5C 93   169          JMP  FIND
9339            170 *
9339 3C 03 93   171 EOC8     BIT  CNTLFLG    IF CNTLFLG=-1
933C 10 13      172          BPL  EOC9
933E AE E9 94   173          LDE  CNTLPTR    LOOK FOR VALID CODE
9341 86 FE      174          STE  PTR        IN CNTLTBL
9343 AE EA 94   175          LDE  CNTLPTR+1
9346 86 FF      176          STE  PTR+1
9348 AA         177          TAE
9349 A9 00      178          LDA  #$0        CNTLFLG=0
934B 8D 03 93   179          STA  CNTLFLG
934E 4C 5C 93   180          JMP  FIND
9351            181 *
9351 AE B2 94   182 EOC9     LDE  NRMLPTR    ELSE.LOOK FOR VALID CODE
9354 86 FE      183          STE  PTR        IN NRMLTBLE
9356 AE B3 94   184          LDE  NRMLPTR+1
9359 86 FF      185          STE  PTR+1
935B AA         186          TAE
935C            187 *
935C A0 00      188 FIND     LDY  #0         CLEAR INDEE
935E 8A         189 FINDLP   TXA              COMPARE TABLE ENTRY
935F D1 FE      190          CMP  (PTR),Y
9361 F0 09      191          BEQ  FOUND
9363 C8         193          INY             IF NOT FOUND, GOTO NEXT MORSE ENTRY
9364 C8         193          INY
9365 B1 FE      194          LDA  (PTR),Y    AND CHECK FOR END OF TABLE
9367 D0 F5      195          BNE  FINDLP
9369 4C 38 93   196          JMP  BEEPNIT      IF NOT FOUND
936C C8         197 FOUND    INY             ELSE GET CORRESPONDING ABCII CODE
936D B1 FE      198          LDA  (PTR),Y    SAVE AND OUTPUT
936F 8D 07 92   199          STA  CHWORD
9373 38         200 OUTCHS   SEC
9373 09 80      201          ORA  #$80       MARK MORSE SOURCE
9375 8D 78 07   203          STA  ICHAR      FORCE MSB=1 FOR APPLE
9378 48         203 RESTREG  PLA             AND SAVE
9379 AA         204          TAE             RESTORE REGISTERS
937A A8         205          PLA
937B A8         206          TAY
937C 48         207          PLA
937D B0 03      208          BCS  RR1
937F 4C 24 FD   209          JMP  GETKEY     KEYBOARD RETURN
9382 91 38      210 RR1      STA  (BAKL),Y   MORSE RETURN
9384 78 07      211          LDA  ICHAR
9387 40         212 IOXTS    RTS             RETURN TO MONITOR
9388            213 *
9388 AE 37 95   214 SEQUENC  LDE  SEQPTR     BET-UP SEQUENC
938B 86 FE      215          STE  PTR
938D AE 38 95   216          LDE  SEQPTR+1
9390 86 FF      217          STE  PTR+1
9392 AA         218          TAE
9393 A0 00      219          LDY  #0
9395 8A         220 SEQFLP   TXA              SEARCH FOR VALID
9396 D1 FE      221          CMP  (PTR),Y    MORSE CHARACTER
9398 F0 0F      223          BEQ  OKSEQ
939A C8         223          INY             SKIP STRING POINTER
939B C8         224          INY
939C C8         225          INY
939D B1 FE      226          LDA  (PTR),Y    IF AT END OF SEARCH,
939F D0 F4      227          BNE  SEQFLP     EEIT
```

ATARI ATARI ATARI ATARI

INTRODUCING...

The Most User Friendly Mail Management program available! It even allows you to catalog your record, book or other collections... Limited only by your imagination!

Fast, machine language sorts—Works on single or double density format—Auto-deletes of duplicates—Print disk directory—Offical State abbreviations built-in—Special coding feature—Re-label fields for unlimited uses—Merge files—Create sub-files—Search on any field—Print labels or file copy—More!

NEW!!! From Atari

Super Speedway Action

POLE POSITION $44.90 Reg $49.95

• 16K Cartridge

FREE CATALOG
► WITH ANY ORDER . . . OR SEND $1.00 (Refundable with Order)

★ OVER 1000 items for your ATARI!
Including product descriptions.
• EPSON • PERCOM
• BRODERBUND • APX
• ROKLAN • ON-LINE
• DATASOFT • ATARI
• ADVENTURE INT'L
• SYNAPSE • VISICALC • Much More

★ We handle only ATARI compatible hardware & software . . . so we know what works best! CALL US FIRST!!!

SUPER SPECIALS... Up To 70% Off!

	Retail	Special		Retail	Special
Gork(D)	39.95	19.95	Ricochet(D)	29.95	9.95 new!
Pacific Coast Hwy(D)	29.95	15.95	Morlock's Revenge(T)	29.95	9.95 3 Stars!
Protector(D)	34.95	19.95	Space Invaders(C)	34.95	19.95
KStar Patrol(C)	39.95	19.95	States & Capitals(T)	15.95	7.95 new!
KRazy Kritters(C)	39.95	19.95 new!	Alien Mauling List(T)	24.95	9.95
KRazy Antics(C)	39.95	19.95	Serpentine(D)	29.95	12.95
Airstrike(D T)	39.95	23.95	Apple Panic(D T)	29.95	9.95 new!
Baseball(C)	49.95	29.95	Stellar Shuttle(D T)	29.95	9.95
Picnic Paranoia(D T)	34.95	19.95	Clowns & Balloons(T)	29.95	12.95
Dr Goodcoates Cavern(D)	29.95	9.95 new!	Megalegs(T)	29.95	9.95 Look!
Match Racer(D T)	29.95	9.95 new!	Compumath Fractions(D)	59.95	12.95
Nautilus(D T)	34.95	19.95	Intruder(T)	29.95	9.95 3 Stars!
Chicken(D T)	34.95	19.95	K Dos(D)	59.95	19.95 3 Stars!
Slime(D T)	34.95	19.95	Alien Swarm(D)	29.95	12.95
Rear Guard(D)	29.95	9.95 new!	Snake Byte(D)	29.95	12.95
Tutti-Frutti(D)	29.95	9.95	Turmoil(C)	34.95	14.95
Rescue at Rigel(D)	29.95	12.95	Shuttered Alliance(D)	39.95	14.95

LIMITED QUANTITIES—WHILE SUPPLIES LAST!

CREDIT CARD ORDERS - • Master Card
TOLL FREE 1-800-452-8013 • American Express
(ORDERS ONLY - For Information (503)683-6620
Shipping & Handling: UPS or PARCEL POST $2.00 • Visa
UPS Air (48 hr. Delivery!) $3.90

COMPUTER PALACE Formerly Royal Software
2160 W. 11th Ave.
Eugene, OR 97402
(503)683-6620

CIRCLE 217 ON READER SERVICE CARD

LEARN TO TYPE OR GET BLOWN TO BITS.

MasterType™ makes typing a blast.

Now there's a typing program for the Apple®[1], Atari®[1] and IBM PC, that dares to be fun. And now it's available for the Commodore 64™[2]. It's MasterType. A combination of fast-action blow 'em up video games with the best instructional programs available. The result? Highly motivating and enjoyable learning.

MasterType is educations' favorite.

In fact, it's the best selling educational program today. And that's no surprise. Reviewers agree. InfoWorld©[3] wrote:

"We had fun reviewing it, and we highly recommend it to those who want to learn typing in an unconventional but motivating way."

InfoWorld©[3] also went on to rate MasterType as "excellent" in all four of its categories.

MasterType teaches your fingers to fly.

MasterType. With 18 explosive learning levels, you'll either learn to type or get blown apart.

39.95 (49.95 for the IBM PC).

All require disk drive:
32K for Atari®[1]
48K for Apple®[1]
64K for IBM PC,
64K for Commodore 64™[2].

MasterType
Lightning Software©
P.O. Box 11235, Palo Alto, CA 94306
(415) 327-3280

1. Atari and Apple are registered trademarks of Atari, Inc. and Apple Computers, Inc. respectively.
2. Commodore 64 is a trademark of Commodore Business Machines, Inc.
3. InfoWorld is a registered trademark of International Data Corporation, Inc.

CIRCLE 179 ON READER SERVICE CARD

MICROSOFT

A.L.D.S.	75.99
APPLESOFT COMPILER	116.99
BASIC COMPILER (APPLE, IBM)	259.99
FLIGHT SIMULATOR (IBM)	34.99
MOUSE WITH WORD	$Call
MULTIPLAN (ALL FORMATS)	165.99
PREMIUM PAK (APPLE)	479.99
SOFTCARD (APPLE)	215.99
TYPING TUTOR II (APPLE)	16.99

Novation

APPLE CAT II	285.99
APPLE CAT 212 (UPGRADE KIT)	319.99
AUTO CAT 212	579.99
D-CAT	155.99
EXPANSION MODULE	34.99
INFONE (EXECUTIVE)	779.99
J-CAT	104.99
SMART CAT 103	169.99
SMART CAT 103/212	429.99

QUADRAM

APIC (APPLE II PARALLEL)	129.99
E-RAM (APPLE)	129.99
512 + (64K)	269.99
IPIC (IBM PARALLEL)	89.99
MICROFAZER	$Call
QUADBOARD 64K	279.99
QUADCHROME MONITOR	529.99
QUADCOLOR I	269.99
QUADLINK	622.99

apple

ALS CPM 3.0	299.99
BANK ST. WRITER	44.99
BPI (GL, AP, AR, INV) ea.	299.99
COPY II PLUS	22.99
DB MASTER	159.99
DEADLINE	32.99
FINGERPRINT	44.99
GRAFORTH	54.99
GRAPPLER +	119.99
HAYES MICROMODEM	255.99
HAYES 1200 BAUD	499.99
MAGICALC	139.99
MAGIC WINDOW II	169.99
MINER 2049er	26.99
MTN CLOCK	189.99
MTN CPS	149.99
MTN MUSIC SYSTEM	269.99
PAYMAR LUCASE REV 7	19.99
PIE WRITER	109.99
TG JOYSTICK	46.99
TIME ZONE	74.99
ULTAMA II	36.99
VISICORP	$Call
WILDCARD	109.99
WIZARDRY	32.99
WORDHANDLER II	129.99
ZAXXON	34.99
ZORK I II III	24.99

POTPOURRI

BROTHER/DTC RIBBONS	2.99
DYSAN 104/1D SS/DD(10)	37.99
DYSAN 104/2D DS/DD(10)	44.99
FLIP FILE (STORES 75)	17.99
LIBRARY CASE (STORES 10)	1.99
MX 80 RIBBON	4.99
MX 100 RIBBON	9.99
PAPER(6½x11-1000 SHTS)	16.99
POWER STRIP W/SURGE	24.99
TPI RIBBONS	5.99
VERBATIM SS/DD (10)	25.99
VERBATIM SS/DD (100)	239.99

Continental

HOME ACCT (A, AT, TRS 80)	44.99
HOME ACCT (OSB)	59.99
HOME ACCT (IBM)	99.99
FCM (APPLE)	65.99
FCM (IBM)	84.99
PROP. MANAGEMENT	299.99
CPA (GL, AP, AR, PAY)	159.99
TAX ADVANTAGE	39.99
ATARI SOFTWARE 1983	14.99
APPLE SOFTWARE 1983	14.99
APPLE GRAPHICS	14.99

IBM

APPLE PANIC	23.99
CDEX TUTORIALS	59.99
CONCURRENT CP/M 86	252.99
COPY II PC	25.99
COSMIC NIGHTMARE	22.99
CPM 86	44.99
CROSSTALK	149.99
d BASE II	419.99
DEADLINE	32.99
EASY FILER	269.99
EASY WRITER II	259.99
HAYES SMARTCOM II	89.99
HAYES 1200B MODEM	479.99
INFOSTAR	289.99
LOTUS 1-2-3	329.99
MILLIONAIRE	49.99
MONTE CARLO 64K	359.99
PFS FILE	99.99
PSF REPORT	89.99
PLAINTRONICS COLOR+	389.99
Q-BASE	139.99
TEMPLE OF APSHAI	26.99
TK SOLVER	139.99
VSIWORD	298.99
VOLKSWRITER	149.99
WORDSTAR	269.99
ZORK I, II, III	24.99

Beagle Bros

ALPHA PLOT	24.99
APPLE MECHANIC	19.99
BEAGLE BAG	19.99
DOS BOSS	15.99
DOUBLE TAKE	24.99
FLEX TEXT	19.99
FRAME-UP	19.99
PRONTO DOS	19.99
TIP DISK #1	14.99
TYPEFACES	14.99
UTILITY CITY	19.99

Videx

CHARACTER ROMS	24.99
ENHANCER II	99.99
FUNCTION STRIP	56.99
INVERSE VIDEO	19.99
PSIO	169.99
SOFTSWITCH	24.99
ULTRATERM	299.99
VIDEOTERM	199.99
VIDEOTERM UTILITIES	24.99
VIDEOTERM W/SS & INV	229.99
VISICALC MEM EXPAND	59.99
VISICALC PRE BOOT	32.99

KENSINGTON MICROWARE

SYSTEM SAVER

- Surge Suppression
- Dual Outlet
- UL Listed
- Fits Apple Stand

$65

KRAFT

JOYSTICK	44.99
JOYSTICK (AT)	14.99
PADDLES	31.99
QUICK-WIS	14.99

SORCIM

SPELLGARD	129.99
SUPERCALC	129.99
SUPERCALC II	179.99
SUPERWRITER	179.99

EDUCATIONAL

BUMBLE GAMES	29.99
DLM	$Call
EDUWARE	$Call
FACEMAKER (A, IBM)	24.99
GAME SHOW (MASTER)	29.99
GERTRUDE'S PUZZLES	29.99
JUGGLES' RAINBOW	21.99
KINDERCOMP (A, IBM)	20.99
MATH BLASTER (IBM)	34.99
MICRO MOTHER GOOSE	29.99
ROCKY'S BOOTS	34.99
SNOOPER TROOPS (A, IBM)	29.99
STORY MACHINE	24.99
WORD ATTACK (IBM)	34.99

USI

P-1 9" GREEN	95.99
P-2 12" GREEN	139.99
P-3 12" AMBER	149.99
P-4 9" AMBER	129.99

SATURN SYSTEMS

ACCELETATOR	529.99
NEPTUNE (80 col + RAM)	199.99
SATURN 128K (APPLE)	399.99
TITAN 64K (IBM)	549.99

SMITH-CORONA TP-1

Letter Quality Printer

$479.99

TRACTOR FEED 149.99

PRINTERS

BROTHER HR1	699.99
EPSON (ALL MODELS)	$Call
GEMINI 10X	299.99
GEMINI 15	429.99
OKIDATA 82A	379.99
OKIDATA 92	529.99

DTC

380 Z **1099.99**

48K BUFFER, 32 CPS, GRAPHICS, DAISY WHEEL

TRACTOR 159.99

- No Charge For Credit Cards
- Prices Subject To Change
- Software Sales Are Final
- Min. $4.00 Shipping Charge
- Purchase Orders Call First

COMPUTER DISCOUNT PRODUCTS

MAIL ORDERS & RETAIL STORE
860 S. Winchester Blvd.
San Jose, CA 95128
(408) 985-0400 Orders Only
(408) 985-0401 Sales & Tech. Asst.

HOURS: MON-FRI 9AM-5PM SAT & SUN 10AM-5PM

CIRCLE 131 ON READER SERVICE CARD

Serial Code Keyboard, continued...

```
93A1 A9 00      228          LDA   #0        SEQFLAG=0
93A3 8D 05 92   229          STA   SEQFLAG
93A6 4C 28 92   230          JMP   BEEPNIT
93A9            231 *
93A9 C8         232 OKSEQ    INY             ELSE, IF FOUND
93AA B1 FE      233          LDA   (PTR),Y   SAVE POINTER TO STRING
93AC AA         234          TAX
93AD C8         235          INY
93AE B1 FE      236          LDA   (PTR),Y
93B0 85 FF      237          STA   PTR+1
93B2 8A         238          TXA
93B3 85 FE      239          STA   PTR
93B5 CE 08 92   240          DEC   SEQOFLG   SET SEQUICE OUT FLAG VALID
93B8 4C 33 92   241          JMP   SEQCHK
93BB            242 ********************************************************
93BB AD 00 92   243 DIT      LDA   ELEMTIM   PRODUCE DIT TONE
93BE 0A         244          ASL   A
93BF A8         245          TAY
93C0 A9 80      246          LDA   #TONE
93C2 4A         247          LSR   A
93C3 AA         248          TAX
93C4 38         249          SEC
93C5 20 32 94   250          JSR   TIMER
93C8 AC 00 92   251          LDY   ELEMTIM   TIME OUT ONE ELEMENT TIME
93CB A2 80      252          LDX   #TONE
93CD 18         253          CLC
93CE 20 32 94   254          JSR   TIMER
93D1            255 *
93D1 AD 07 92   256          LDA   CHWORD    SHIFT DIT INTO CHARACTER WORD
93D4 0A         257          ASL   A
93D5 30 30      258          BMI   EDCHK      IF 7 DIT-DAH'S
93D7 8D 07 92   259          STA   CHWORD    ELSE,
93DA A9 02      260          LDA   #2        INIT TCOUNT
93DC 8D 06 92   261          STA   TCOUNT
93DF 4C B1 93   262          JMP   POLLODP   AND LOOK FOR NEXT CONTACT CLOSURE
93E2            263 ********************************************************
93E2 AC 00 92   264 DAH      LDY   ELEMTIM   PRODUCE DAH SOUND
93E5 A2 80      265          LDX   #TONE
93E7 38         266          SEC
93E8 20 32 94   267          JSR   TIMER
93EB            268 *
93EB AC 00 92   269          LDY   ELEMTIM   PAUSE ONE ELEMENT TIME
93EE A2 80      270          LDX   #TONE
93F0 18         271          CLC
93F1 20 32 94   272          JSR   TIMER
93F4            273 *
93F4 AD 07 92   274          LDA   CHWORD    SHIFT DAH INTO CHWORD
93F7 0A         275          ASL   A
93F8 30 0D      276          BMI   EDCHK      IF 7 DIT-DAH'S
93FA 09 01      277          ORA   #1        ELSE,
93FC 8D 07 92   278          STA   CHWORD    INIT TCOUNT
93FF A9 02      279          LDA   #2
9401 8D 06 92   280          STA   TCOUNT
9404 4C B1 92   281          JMP   POLLODP
9407            282 ********************************************************
9407 C9 80      283 EDCHK    CMP   #128      IF 7 DITS,
9409 D0 0B      284          BNE   EDCHK1
940B 4A         285          LSR   A
940C 8D 07 92   286          STA   CHWORD
940F CE 01 92   287          DEC   EDITFLG   EDITFLG=-1
9412 A9 15      288          LDA   #$15      "RIGHT ARROW"
9414 10 0D      289          BPL   EDCHK2
9416 C9 FE      290 EDCHK1   CMP   #254      IF 7 DAH'S
9418 D0 0C      291          BNE   EDCHK3
941A 4A         292          LSR   A
941B 8D 07 92   293          STA   CHWORD
941E CE 01 92   294          DEC   EDITFLG   EDITFLG=-1
9421 A9 08      295          LDA   #$08      "LEFT ARROW"
9423 4C 72 93   296 EDCHK2   JMP   OUTCHS
9426 4C 28 92   297 EDCHK3   JMP   BEEPNIT   IF GARBAGE,BEEP
9429            298 ********************************************************
9429 A0 0A      299 BEEP     LDY   #10       PRODUCE A SHORT BEEP TONE
942B A2 38      300          LDX   #40
942D 38         301          SEC
942E 20 32 94   302          JSR   TIMER
9431 40         303          RTS
9432            304 ********************************************************
9432 B0 04      305 TIMER    BCS   TIMO      IF CARRY SET,
9434 A9 41      306          LDA   #$41      PATCH TO TOGGLE SOUND
9436 90 02      307          BCC   TIMO1
9438 A9 30      308 TIMO     LDA   #$30      ELSE, DUMMY ADDRESS
943A 8D 47 94   309 TIMO1    STA   PATCH+1
943D A4 40      310 TLP1     LDA   #$40      OUTER LOOP
943F 48         311 TLP11    PHA
9440 8A         312          TXA             TONE LOOP
9441 38         313          SEC
9442 E9 01      314 TLP2     SBC   #1
9444 D0 FC      315          BNE   TLP2
9446 AD 30 C0   316 PATCH    LDA   SOUND
9449 68         317          PLA
944A 38         318          SEC
944B E9 01      319          SBC   #1
944D D0 F0      320          BNE   TLP11
```


America's #1 Software Dealer

Preparing for PSAT or SAT ?

Give yourself the competitive edge with these PSAT preparation programs, all at Software City. The Program Discount Center. Stop in today.

PDI · Krell
Harcourt Brace Jovanovich

Programs · Books · Magazines
Disks · Peripherals · Accessories

THOUSANDS OF PROGRAMS — ALWAYS DISCOUNTED

Software City

Birmingham, AL · 7771 Eastwood Mall (205) 591-8314
Phoenix, AZ · 5515 N. 7th St. Suite 3 (602) 264-1422
Tucson, AZ · 5811 E. Speedway (602) 721-1008
Denver, CO · coming soon
Orange, CT · Loehmann's Plaza (203) 799-2119
Stamford, CT · 203 Bedford St. (203) 359-1414
Wilmington, DE · coming soon
Sarasota, FL · 7211 S. Tamiami Trail (813) 923-4040
Tampa, FL · 13727 N. Dale Mabry (813) 961-8081
Atlanta, GA · Spring Festival (404) 257-1833
Davenport, IA · 903 E. Kimberly Rd. (319) 386-2345
Arlington Hts., IL · 2304 E. Rand Rd. (312) 259-4260
Louisville, KY · coming soon
W. Springfield, MA · 1313 Riverdale Rd. (413) 736-5101
Southfield, MI · 29500 Southfield Rd. (313) 569-6966
Sargenfield, NJ · 106 N Washington Ave. (201) 387-8388
Cherry Hill, NJ · 2110 Rt 70 East (609) 424-8155
Englishtown, NJ · Yorktowne Center (201) 972-1150
Fair Lawn, NJ · 34-11 Broadway (201) 791-8793
Green Brook, NJ · 60 Rt 22 West (201) 968-7780
Hamilton, NJ · 3100 Quakerbridge Rd. (609) 890-1066
Linwood, NJ · Central Square (609) 927-3393
Midland Park, NJ · 85 Godwin Ave (201) 447-0794
Montvale, NJ · 479 Kinderkamack Rd (201) 391-0931
Pine Brook, NJ · 101 Rt 46 East (201) 575-4574
Princeton, NJ · 33 Witherspoon St (609) 683-1644
Red Bank, NJ · 50 Broad St (201) 747-6490
Ridgefield, NJ · 543 Bergen Blvd (201) 943-9444
Summit, NJ · 5 Beechwood Rd (201) 273-7904
Tasnech, NJ · 151 Cedar Lane (201) 692-8296
Morristown, NJ · coming soon
Pompton Plains, NJ · coming soon
Fairport, NY · 134 Village Landing (716) 223-3723
Forest Hills, NY · 113-01 Queens Blvd (212) 261-1141
Great Neck, NY · 576 Middle Neck Rd (516) 482-4629
Manhattan, NY · 665 Lex. bet. 55 & 56 Sts (212) 832-0760
Mt. Kisco, NY · 167 Main St (914) 666-5024
N. White Plains, NY · 641 N. Broadway (914) 946-1800
Pomona, NY · Old Rt. 202 (914) 354-3706
Staten Island, NY · 1474 Hylan Blvd. (212) 351-9217
Syracuse, NY · coming soon
Charlotte, NC · coming soon
Columbus, OH · 1950 East Rt 161 (614) 888-6660
Mayfield Hts., OH · Mayfield Shopping Ctr (216) 473-8124
Tulsa, OK · 4821 S. Peoria
Bethel Park, PA · Village Square Mall (412) 854-1777
Exton, PA · 14 Marchwood Rd (215) 524-1483
Pittsburgh, PA · 7910 Perry Highway (412) 367-0441
Whitehall, PA · 2802 MacArthur Rd (215) 434-3060
King of Prussia, PA · coming soon
San Juan, PR · 1340C F D Roosevelt Ave (809) 781-9357
Fairfax, VA · coming soon
Richmond, VA · 9027 Quioccasin Rd (804) 740-8400
Virginia Beach, VA · 2782 Virginia Beach Blvd
Virginia Beach, VA · 2782 Virginia Beach Blvd
Bellevue, WA · 1100 Bellevue Way (206) 451-1141
Coming Soon — Software City in London, England

BUSINESS SOFTWARE: Catalog at all stores or write to SOFTWARE CITY Corporate Software Dept.
RETAIL STORE FRANCHISES: $32-40,000 est. total invest. Offering by prospectus only. Direct inquiries to SOFTWARE CITY Franchise Dept.
1415 Queen Anne Road • Teaneck, NJ 07666

CIRCLE 233 ON READER SERVICE CARD

ROAR!

Do tricks with your computer without breaking your wallet's spirit! A subscription to **Chromasette** gets you a tape or disk full of quality programs delivered by First Class Mail every month! Write for more information or, better yet, try a Back Issue. At $6.00 for 6 to 8 programs on tape ($11.00 on disk), you'll see just how good and inexpensive **Chromasette** software is.

The Bottom Line:	Tape	Disk
1 year (12 issues)	$50.00	$95.00
6 months (6 issues)	$30.00	$55.00
Single Issues	$ 6.00	$11.00

Calif residents add 6% to single issues. First Class postage to N. Amer. included. Overseas add $40 to subscriptions and $1 to single issues. Sent AO ver. All back issues from July 1981 available—ask for list. Programs are for the Extended BASIC model and occasionally for disks.

Chromasette
PO Box 1087 Santa Barbara, CA 93102
(805) 963-1066

Serial Code Keyboard, continued...

```
944F 88          321          DEY
9450 D0 EB       323          BNE   TLP1
9452 60          232          RTS
9453             224 **********************************************************
9453 03 45 03    225 NAMTABL DFB  2,$45,3,$54,4,$49,5,$41
9456 54 04 49
9459 05 41
945B 06 4E 07    234          DFB   6,$4E,7,$4D,8,$52,9,$55
945E 4D 08 53
9461 09 55
9463 0A 52 0B    327          DFB   10,$52,11,$57,13,$44,12,$4B
9466 57 0C 44
9469 0D 4B
946B 0E 47 0F    228          DFB   14,$47,15,$4F,16,$48,17,$56
946E 4F 10 48
9471 11 56
9473 12 44 13    229          DFB   18,$46,19,$20,30,$4C,31,$0A
9476 20 14 4C
9479 15 0A
947B 16 50 17    230          DFB   22,$50,23,$4A,24,$42,25,$58
947E 4A 18 42
9481 19 58
9483 1A 43 1B    321          DFB   26,$42,27,$59,28,$5A,29,$51
9486 59 1C 5A
9489 1D 51
948B 1E 0D 1F    232          DFB   30,$0D,31,$08
948E 08
948F 2F 21 37    223          DFB   $3F,$31,$37,$22,$33,$23
9492 22 23 33
9495 21 24 20    234          DFB   $31,$34,$20,$25,$30,$34
9498 25 20 36
949E 38 27 2C    335          DFB   $38,$37,$2C,$28,$3E,$29
949E 28 3E 29
94A1 2F 30 78    336          DFB   $3F,$20,$78,$2A,$6A,$2B
94A4 3A 6A 3D
94A7 72 2C 41    227          DFB   $72,$2C,$41,$3D,$55,$2E
94AA 3D 55 2E
94AD 43 3F 4F    338          DFB   $42,$2F,$4F,$1B,00
94B0 1B 00
94B2 53 94       339 NAMLPTR DW   NAMTABL
94B4 02 05 03    340 CNTLTBL DFB  2,$05,3,$14,4,$09,5,$0
94B7 14 04 09
94BA 05 00
94BC 06 0E 07    241          DFB   6,$0E,7,$0D,8,$12,9,$15
94BF 0D 08 13
94C3 09 15
94C4 0A 13 0B    343          DFB   10,$13,11,$17,13,$04,13,$0B
94C7 17 0C 04
94CA 0D 0B
94CC 0E 07 0F    342          DFB   14,$07,15,$0F,16,$08,17,$16
94CF 0F 10 08
94D2 11 16
94D4 12 04 14    244          DFB   18,$04,20,$0C,32,$10,23,$0A
94D7 0C 14 10
94DA 17 0A
94DC 18 02 19    245          DFB   24,$02,35,$18,26,$03,37,$19
94DF 18 1A 03
94E2 1B 19
94E4 1C 1A 1D    246          DFB   28,$1A,29,$11,00
94E7 11 00
94E9 B4 94       347 CNTLPTR DW   CNTLTBL
9500             248          ORG   ELEMTIM+$200
9500 06 5E 16    349 SHFTBL  DFB   $06,$5E,$16,$40,$2F,$21,$37,$32
9503 40 3F 31
9506 37 33
9508 22 23 21    250          DFB   $23,$22,$31,$34,$20,$35,$20,$26
950B 34 30 25
950E 20 36
9510 28 27 3C    251          DFB   $28,$27,$3C,$28,$3E,$29,$78,$2A
9513 28 3E 29
9516 78 2A
9518 6A 2B 72    252          DFB   $6A,$2B,$72,$3C,$41,$2D,$55,$3E
951B 3C 41 3D
951E 55 3E
9520 42 3F 07    353          DFB   $42,$3F,$07,$5D,00
9523 5D 00
9525 00 95       354 SHFTPTR DW   SHFTBL
9527 29 95       355 SEQPTR  DW   SEQTBL
9529 09          356 SEQTBL  DFB   $09
952A 48 95       357          DW    SEQU
952C 14          358          DFB   $14
952D 4C 95       359          DW    SEQL
952F 1A          360          DFB   $1A
9530 74 95       361          DW    SEQC
9532 10          362          DFB   $10
9533 58 95       363          DW    SEQH
9535 07          364          DFB   $07
9536 63 95       365          DW    SEQM
9538 08          366          DFB   $08
9539 6E 95       367          DW    SEQS
953B 0A          368          DFB   $0A
953C 50 95       369          DW    SEQR
953E 0C          370          DFB   $0C
953F 54 95       371          DW    SEQD
```

Serial Code Keyboard, continued...

```
9541 18          372          DFB  $18
9542 7D 95       373          DW   SEOR
9544 0E          374          DFB  $0E
9545 7F 95       375          DW   SEOG
9547 00          376          DFB  00
9548             377          MSB  OFF
9548 1B FF 49    378 SEQU     DFB  $1B,$FF,$49,00
9548 00
954C 1B FF 4A    379 SEQL     DFB  $1B,$FF,$4A,00
954F 00
9550 1B FF 4B    380 SEQR     DFB  $1B,$FF,$4B,00
9553 00
9554 1B FF 4D    381 SEQD     DFB  $1B,$FF,$4D,00
9557 00
9558 52 55 4E    382 SEQH     ASC  "RUN       HELLO"
955B 20 48 45
955E 4C 4C 4F
9561 0D 00       383          DFB  $0D,$00
9563 43 41 4C    384 SEQH     ASC  "CALL     -151"
9566 4C 20 2D
9569 31 35 31
956C 0D 00       385          DFB  $0D,$00
956E 48 4F 4D    386 SEQS     ASC  "HOME"
9571 45
9573 0D 00       387          DFB  $0D,$00
9576 43 41 54    388 SEOC     ASC  "CATALOG"
9579 41 4C 4F
957A 47
957B 0D 00       389          DFB  $0D,$00
957D FF 07       390 SEOB     DFB  $FF,$07
957F 1B 40 1B    391 SEOG     DFB  $1B,$40,$1B,$43,$1B,$43,$1B,$43,$1B,$43
9582 43 1B 43
9585 1B 43 1B
9588 43
9589 20 20 20    392          ASC  "                              HELLO GUESTS !"
958C 20 20 20
958F 20 20 20
9592 20 20 20
9595 20 48 45
9598 4C 4C 4F
959B 20 47 55
959E 45 53 54
95A1 53 20 21
95A4 00          393          DFB  $00
*** SUCCESSFUL ASSEMBLY  NO ERRORS
```


40-50% Savings On Software

As a member of the Software of the Month Club, you'll receive:

- **SAVINGS:** high-quality buying means low prices to members
- **SELECTIONS:** members to decide best sellers. Others also available
- **NEWSLETTERS:** tips & reviews by consultants
- **HARDWARE SPECIALS:** pop savings

Membership registration fee $25.
Join now for only $6 (limited time)
No minimum purchase required.

QC 10-83

Software of the Month Club, Inc.
953 Mission St., Mint Mall
San Francisco, CA 94103

Name
Address
City/State/Zip
Enclosed is **$6**. Please enroll me in the Club
☐ Check or Money Order ☐ VISA ☐ MASTERCARD
Exp. Date
Card #
Signature

CIRCLE 189 ON READER SERVICE CARD

NEW EDUCATIONAL OFFERINGS FROM SEI

SEI™ History & Government Series

Comprehensive review, reinforcement, and mastery in American History, Government, European History, World Government, Asian, African History, more.

Available in sets or individually.

Easy-to-use editor/ authoring system on every SEI™ disk

Foreign Languages

Begin learning a foreign language with SEI. In a hurry? Brush up with intensive study for upcoming business trip, etc.

Get the basics fast.

French	$30
German	$30
Spanish	$30

Ask about:
SEI™ Literature Series
SEI™ SAT Skills Series
and other quality **SEI** products.

Available for:
Apple II, IBM PC, TRS-80
(trademarks of Apple, IBM, Tandy)

SEI SLIWA ENTERPRISES INCORPORATED

2360-J George Washington Highway
Yorktown, VA 23692
(804) 898-8386

CIRCLE 231 ON READER SERVICE CARD

Unbeatable Prices

Apple Business

Artsci

Magic Window II	$ 95

Ashton-Tate

dBase II (Req. Z-80)	$410

Broderbund

Payroll	$240
Accounts Receivable	$240
The Bank Street Writer	$ 45

Continental Software

The Home Accountant	$ 48
F.C.M.	$ 82
CPA Module #1-G/L	$150
CPA Module #2-A/R	$150
CPA Module #3-A/P	$150
CPA Module #4-Payroll	$150
CPA Module #5-Property Mgt.	$305

Dataasoft

Micropainter	$ 23
Datasm 85 2.0	$ 59
Lisp Interpreter	$ 79
The Basic Compiler	$ 65

Don't Ask Software

S.A.M	$ 79

Microcomputer Products Hayes

Hayes Terminal Program	$ 65

Howard Software

Creative Financing	$129
Real Estate Analyzer II	$110
Tax Preparer 1983	$145

IUS

Professional Easywriter	$115
Original Easywriter	$ 65
Original Easymailer	$ 45
Pro. Easywriter/Mailer Combo	$189
Orig. Easywriter/Mailer Combo	$ 89

Link Systems

Datalax	$110
Datalink	$ 62

Lotus

Executive Briefing System	$125
Alphabytes Font	$ 17
Alphabets Font	$ 17

Micro Lab

The Tax Manager	$ 95
Data Factory 83	$189
Payroll Manager	$189

Microsoft

Tasc Compiler	$119
A.L.D.S. (Req. Z-80)	$ 79
Multiplan (Apple Dos or Z-80)	$175

Systema Plus

Accounting Plus -2 G/L	$238
Accounting Plus (GL, AP, AR)	$499
Accounting Plus (GL, AP, AR, INV)	$629

On-Line

Screenwriter II	$ 82
The Dictionary	$ 85
Screenwriter Professional	$129
The General Manager II	$140

PBL Corporation

Personal Investor	$ 95

Sensible Software

Sensible Speller	$ 79
Multi Disk Catalog III	$ 17

Silicon Valley

Word Handler II	$ 45
List Handler	$ 39
"The Handlers"	$ 75

Software Publishing

PFS: Report	$ 85
PFS: File	$ 85
PFS: Graph	$ 85

Sorcim/ISA

Supercalc (Req. Z-80)	$110
Spellguard (Req. Z-80)	$125

Southeastern Software

Data Capture 4.0	$ 47
Data Capture 4.0/80	$ 59

Visicorp

Visicalc 3.3	$165
Visiplot	$139
Visitrend/Plot	$199
Visidex	$165

Apple Pre-School /Educational

Sticky Beer Bop	$ 30
Sticky Bear Numbers	$ 30
Sticky Bear ABC	$ 30
In Search of the Most Amazing Thing	$ 27
Hey Diddle Diddle	$ 20
Snooper Troops #1/Spinnaker	$ 30
Snooper Troops #2/Spinnaker	$ 30
Delta Drawing/Spinnaker	$ 34
Story Maker/Spinnaker	$ 26
Face Maker/Spinnaker	$ 26
Rhymes & Riddles/Spinnaker	$ 20
PLATO Whole Numbers	$ 39
PLATO Decimals	$ 39
PLATO Fractions	$ 39
Alien Counter/Face Flash	$ 24
Gulp & Arrow Graphics	$ 24
Frenzy Flip/Flop	$ 24
Battling Bugs/Concentration	$ 24
The Jar Game/Chasm	$ 24
PDI Preschool IQ Builder	$ 24
Star Gazers Guide/Synergistic	$ 22
Astro Quotas/PDI	$ 17
Juggles Rainbow/Learning Co	$ 20
Bumble Games/Learning Co.	$ 27
Bumble Plot/Learning Co	$ 27
Gertrudes Secrets/Learning Co	$ 30
Gertrudes Puzzles/Learning Co	$ 30
Rocky's Boots/Learning Co	$ 34
Compu-Read/Eduware	$ 23
Spelling Bee w/Reading Primer	$ 27
Algebra I/Eduware	$ 34
Fractions/Eduware	$ 34
Decimals/Eduware	$ 34
Master Type/Lightning Software	$ 27
Type Attack/Sirius	$ 27
Wordrace/Don't Ask	$ 17
Dualing Digits/Brodarbund	$ 20
SAT Word Attack/Harcourt Brace	$ 34
New Step by Step/PDI	$ 59
Whole Brain Spelling/Subloqic	$ 23

Apple Hit List

Normandy	$ 27
Witness	$ 34
Germany 1985	$ 39
Epidmic	$ 23
Galactic Gladiator	$ 27
The Cosmic Balance	$ 27
The Battle of Shiloh	$ 27
Guadecanal	$ 39
Pursuit ot the Grat Spee	$ 39
The Shattered Alliance	$ 39
AE	$ 20
Space Vikings	$ 34
Kabul Spy	$ 20
Zero Gravity Pinball	$ 20
Electric Duet	$ 20
Tuesday Morning Quarterback	$ 20
Hi-Res Computar Golf	$ 20
David's Midnight Magic	$ 23
Track Attack	$ 20
Sargon II	$ 23
Hi Res Football	$ 27
Star Blazer	$ 22
Swashbuckler	$ 23
Raptcn	$ 27
Critical Mass	$ 27
Cannonball Blitz	$ 23
Pool I 5	$ 23
Cyborg	$ 22
Crisis Mountain	$ 23
S.E.U.I.S.	$ 27

Knight of Diamonds	$ 23
Way Out	$ 27
Zaxxon	$ 27
S.A.G.A. Adventure	Ea. $ 27
Serpentine	$ 23
Choplifter	$ 23
Frogger	$ 23
Sea Fox	$ 20
Temple of Apshai	$ 27
Zork I, II, III	Ea. $ 27
Castle Wolfenstein	$ 20
Wizard & the Princess	$ 22
Ulysses & the Golden Fleece	$ 23
Wizardry	$ 34
Tigers in the Snow	$ 27
Sherwood Forest	$ 23
Deadline	$ 34
Bandits	$ 23
Starcross	$ 27
Aztec	$ 27
Mask of the Sun	$ 27
Pie Man	$ 20
Miner 2049er	$ 29
Ultima II	$ 39
Dark Crystal	$ 27
Millionaire	$ 55
Hi-Res Secret	$ 79
Picture Artist	$ 23
Suspended	$ 35

Graphics & Utilities

Beagle Brothers

Apple Mechanic	$ 20
Tip Disk #1	$ 15
Flash Text	$ 20
Frame Up	$ 20
Typetacas (required Apple Mechanic)	$ 15

Penguin Software

Complete Graphics System	$ 40
Special Effects	$ 27
Graphics Magician	$ 39

Apple IIe

64K with 80 column card, one Apple drive, one Apple low glare monochrome (green phosphor) monitor, one monitor stand

Call For Price

★ ★ Specials of the Month ★ ★

Franklin Ace 1000 64K w/color	$849
Elephant Diska s/s	$ 18
Verbatima Diska s/d	$ 24
Maxell Diskettes s/d	$ 30
Amdek Color I	$290
Amdek Color II	$650
Micromodem II	$250
Micromodem II w/Terminal Pk	$290
Novation Apple Cat II Modem	$329
Hayes Smartmodem 300	$209
Hayes Smartmodem 1200	$499
The Grappler +	$119
Flip & File Diskette Box	$ 21
Microbuffer II 32K Parallel Specify - Internal, External	$199

Call Toll Free

1-800-634-6766

Order Line Only

Information & Order Inquiries
(702) 369-5523
Technical Assistance (702) 796-0296

We accept VISA and MasterCard

Mon. — Fri. 8 A.M. to 6 P.M.
Sat. 9 A.M. to 5 P.M.
Dealers' Inquiries Invited

Fantastic Selection

IBM Specials

Advanced Operating Systems
The Programmer ... $128

Applied Software
Versaform ... $249

Ashton-Tate
dBase II (CP/M 86) ... $419
dBase II (MS Dos) ... $419

Continental Software
The Home Accountant Plus ... $ 95
1st Class Mail ... $ 79

Computer Software Technology
WordPC ... $ 49

Davidson & Associates
Speed Reader ... $ 49

Datamost
Real Estate Investment Program ... $ 79
Write-On ... $ 85

Comprehensive Software
PC Tutor ... $ 55

Denver Software
Executive Accounting System (128K) ... $469

Eagle Software
Money Decisions ... $129

Howard Software
Real Estate Analyzer II ... $150
Tax Preparer 1983 ... $150

Information Solutions
The 25th Hour ... $ 65

Innovative Software
T.I.M. III ... $299

IUS
Easy Filer ... $239
Easy Writer II ... $209
Easy Planner ... $159
Accounts Receivable ... $369
Accounts Payable ... $369
General Ledger ... $369
Financial Management Series ... $899

Micro Lab
The Tax Manager ... $150

Micro Stuff
Crosstalk 3.3 ... $135

Micro Pro
Wordstar 3.3 ... $299
Mailmerge 3.3 ... $150
Spellstar 3.3 ... $150
Infostar 3.3 ... $299
Reporstar 3.3 ... $209

North American Business Systems
Answer ... $150

PBL Corporation
Personal Investor ... $ 89

Peachtree
General Ledger ... $229
Accounts Receivable ... $229
Accounts Payable ... $299
Peach Pak (GL/A/R/AP) ... $229

Software Publishing
PFS Report ... $ 65
PFS File ... $ 95

Digital Research
CP/M-86 ... $ 39
C Basic 86 ... $125
Pascal/MT + 86 ... $239
Speed Programming Package 86 ... $125
CIS Cobol 86 ... $480

Peter Norton Computing
Norton Utilities ... $ 55

Select
Select Word Processing System ... $299

Software Systems
Multimate ... $289

Sorcim/ISA
Supercalc ... $179
Supercalc 2 ... $239
Spellguard ... $125

Southeastern
Data Capture ... $ 75

Visicorp
Visicalc (256K) ... $165
Desktop Plan 1 ... $199
Visitrand/Plot ... $199
Visiplot ... $199
Visidex ... $199
Visischedule ... $199
Business Forecasting Model ... $ 99



commodore

VIC 20	*$ 99*
Commodore 64 with factory trade-in	*$219*
1530 Datasette	*$ 64*
1541 Disk Drive	*$249*
1525 Graphic Printer	*$229*
1600 Modem	*$ 89*
1701 Monitor	*$279*
Super Expander	*$ 59*
8K Memory	*$ 52*
16K Memory	*$ 89*
RS232 Interface	*$ 43*

Atari

600XL	*CALL*
800XL	*CALL*
1400XL	*CALL*
1450XLD	*CALL*

Hardware

Monitors

Amdek
Color II ... $ 550
Color III ... $ 399
Color IV (RGB Analog Input) ... $1029
Amdisk 3 ... $ 729
Amplot ... $ 769
Amdek ... $ 179

NEC
NEC JB 1201M ... $ 189

Quadram
Hi-Res RGB Monitor ... $549
800 x 240 Resolution

Printers

NEC
NEC 8023A ... $ 430
NEC 3530 ... $1599
NEC 7710 ... $2059
NEC 7730 ... $2059
NEC 3550 ... $1899

Diablo
Diablo 620R (25CPS) ... $ 949
Diablo 630R (40CPS) ... $1729
Diablo 630KSR (40CPS) ... $2429

Epson
FX80 ... $ 599
FX100FT ... $ 799

Smith Corona
TP-1 Parallel ... $ 499

Okidata
ML82A ... $ 419
ML83A ... $ 649
ML84P ... $ 979
ML84S ... $1089
ML92 ... $ 489
ML93 ... $ 869

IDS
Microprism 80 ... $ 549
Prism 132 ... $1399
(with Sheetfeed & Graphics)
Prism 132 ... $1589
(with Sheetfeed, Graphics & Color)
Prism to IBM Cable ... $ 48

Citoh
6510 Prowriter ... $ 365
F10 Starwriter ... $1199
F10 Printmaster ... $1599

Mannesmann Tally
MT 160L ... $ 599
MT 1802 (Parallel) ... $1559
MT 1805 (Serial) ... $1559

Gemini
Gemini 10 ... $ 319
Gemini 15 ... $ 479

Qume
Qume Sprint 11 + ... $1349
Tractor Feed ... $ 175
Printer Interface ... $ 79

Software & Utilities	
Visicalc ...	$189
Computer's Financial Wizard ...	$ 45
Color Accountant ...	$ 85
Mail Merge ...	$ 20
Data Perfect ...	$ 75
Letter Perfect ...	$105
Bank Street Writer ...	$ 45
Text Wizard ...	$ 85
File Manager 800 + ...	$ 65
Datasm 65 2.0 ...	$ 59
Syn Assembler ...	$ 34
K-Dos ...	$ 59
Lisp Interpreter ...	$ 79
Basic Compiler ...	$ 65
Datalink ...	$ 27
Atari World ...	$ 39
Color Print ...	$ 27
Graphics Generator ...	$ 17
Micropainter ...	$ 23
Bishops Square ...	$ 20
Graphics Master ...	$ 17
P M P Property Management ...	$179

Programming Techniques

Display Lists	$ 17
Horiz/Vert Scroll	$ 17
Page Flipping	$ 17
Basics of Animation	$ 17
Player Missile Graphics	$ 24
Sound	$ 24
Data Files	$ 24

Computer Outlet

1095 E. Twain Las Vegas, Nevada 89109 (702) 796-0296

ORDERING INFORMATION AND TERMS: For Fast Delivery send cashier checks, money orders or direct bank wire transfers. Personal and company checks allow 3 weeks to clear. C.O.D. orders ($3.00 minimum) and 1% of all orders over $300. School purchase orders welcomed. Prices reflect a cash discount only and are subject to change. Please enclose your phone number with any orders. Shipping — Software ($2.50 minimum). Shipping — Hardware (please call). Foreign orders, APO & FPO orders — $10 minimum and 15% of all orders over $100. Nevada residents add 5 1/4% sales tax. All goods are new and include factory warranty. Due to our low prices, all sales are final. All returns must have a return authorization number. Call 702 369-5523 to obtain one before returning goods for replacement.

CIRCLE 134 ON READER SERVICE CARD

Using The Game Paddle In The Laboratory And Classroom

John F. De Gilio

Many teachers think the hand controllers (game paddles) that attach to the microcomputer are frivolous and don't belong in the laboratory or classroom. The association of controllers with game playing has given them a bad reputation, but sometimes entering data through the game paddles is better than using the keyboard.

I offer a rationale and a method for using the hand controllers in the design of software for student use. For illustrative purposes, I use the Apple computer code, but the logic is easily converted to other computer systems.

When a teacher brings a microcomputer to the class or laboratory as a "number cruncher" to process student data, he can expect the longest queue to be students awaiting their turn to enter data on the keyboard. This nonproductive time results from students' inexperience with a keyboard and the need to press the return as well as the inability of the computer to process more than one student's data at a time. The game paddles reduce data entry time because they rely only on the student's ability to turn a knob and press a button. For very young or unskilled students and large classes, to approach two paddles on a stand is less threatening than to face an entire keyboard. The teacher spends less pre-lab time explaining how to use the computer. In addition, by down playing the role of the computer, the focus remains on the laboratory exercise.

Setting Up

You will need a laboratory stand with a sturdy rectangular base and a short upright bar to which the hand controllers may be attached with clamps, rubber bands, or masking tape. The monitor, facing away from the keyboard, is placed on the computer and beside the paddle stands. Students, with the data that they have collected or derived, approach the paddles and turn the knobs on the controllers while watching the screen. The numbers change on the screen until they match the student's data. In this way, the student can input two variables. When the screen matches the student data, the student presses the button on the side of the controller, and the computer processes the data and flashes the information on the screen. The other paddle button resets the screen for the next student, and the process begins again.

For this type of application you must create an initialization module that enables the teacher to set parameters and a use module for the student. Before the class, the teacher loads the program, sets the maximum values to be displayed by each paddle, the precision, and the units and format for displayed values. Once the parameters are set, the teacher switches to the use mode for students.

Programming

The Basic computer language has built in a facility to read the value of the knob settings and determine whether the button on the side has been pressed. In Applesoft Basic, you can do this with the following programming lines:

```
95 HOME
100 X=PDL(0):REM READ PADDLE ZERO
120 VTAB 10:PRINT "PADDLE ZERO SETTING = ";X
140 Y=PDL(1):REM READ PADDLE ONE
150 VTAB 12:PRINT "PADDLE ONE SETTING = ";Y
200 GOTO 100
```

The game controllers are numbered 0 and 1 and should be clearly marked to distinguish them. The values generated by both paddles are between 0 and 255, depending on the amount of rotation. Because partial rotation is a fraction of a complete turn, it can be expressed as the decimal equivalent of the full rotation. Inclusion of the following code lines makes that adjustment:

```
105 X=(255 - X)/255
145 Y=(255 - Y)/255
```

These code lines generate values of X and Y that range between 0 and 1. The following lines allow for setting the maximum values to be generated by each paddle:

```
10 PRINT "ENTER SCALE MAXIMUM FOR PADDLE ZERO":
15 INPUT M0
20 PRINT "ENTER SCALE MAXIMUM FOR PADDLE ONE":
25 INPUT M1

110 X=M0 * X : REM ADJUST PDL 0 TO MAX VALUE
147 Y=M1 * Y : REM ADJUST PDL 1 TO MAX VALUE
```

With the inclusion of the statements above, the values gener-

John F. DeGilio, 77 Whittier Blvd., Poughkeepsie, NY 12603.

We will give you 10 megabytes of hard disk storage for your IBM-PC for $1195.00.
(Includes interface and all cables)
There is only one number to call:

1-800-237-8977

In Florida call 1-813-786-1259

For an additional $300.00, you can have a full 20 megabytes of on-line storage.

The Systems Group

2340 State Route 580/Suite 234
Clearwater, Florida 33575
Telex 701484

Send for our free 100 page catalog.

IBM is a trademark of IBM Corporation
APPLE is a trademark of Apple Computer Inc.
TRS-80 is a trademark of The Radio Shack Division of Tandy Corporation
XEROX is a trademark of Xerox Corporation

Offer good while quantities last.

CIRCLE 263 ON READER SERVICE CARD

ated by the paddles will range between zero and the set maximum. Then you must round them to the appropriate decimal place, which is determined by the accuracy of the measuring instruments that the students use. It is important to set the number of decimal places under program control. To do this, add the following statements:

```
30 PRINT "HOW MANY DECIMAL PLACES FOR PADDLE 0"
35 INPUT F0
40 PRINT "HOW MANY DECIMAL PLACES FOR PADDLE 1"
45 INPUT F1
50 REM SET THE ROUNDING PLACE FOR EACH PADDLE
55 K0 = 5 * (1 / 10 ^ (F0 +1))
60 K1 = 5 * (1 / 10 ^ (F1 +1))
114 REM ROUNDING ALGORITHM FOR PADDLE 0
115 X = INT ( 10 ^ F0 * ( X + K0 )) / 10 ^ F0
148 Y = INT ( 10 ^ F1 * ( Y + K1 )) / 10 ^ F1
```

Now the values are right, but because of printing problems you must format the data and print them properly.

```
117 X$ = RIGHT$( "          "+ STR$(X),8)
149 Y$ = RIGHT$( "          "+ STR$(Y),8)
```

Change the print statements for character data.

```
120 VTAB 10: PRINT "PADDLE ZERO SETTING = ";X$
150 VTAB 12: PRINT "PADDLE ONE SETTING = ";Y$
```

When the program is run, the paddle values are in a clear, readable form at the precision dictated by the teacher. Then include those lines for which the function is intended. With the values collected by the students, incorporate the algorithm that processes the values. In the illustration you multiply the values input through the paddles. Any Basic arithmetic statement could be substituted. It could be as easy as addition or multiplication, but it also could include any algorithm that requires two variables to solve for an unknown. To ensure that the computer is working with the values that are being displayed to the student, turn the character values (X$ and Y$) to numeric form. In the illustration I do not format the result and leave it to readers who want to use the function in this form:

```
200 Z = VAL(X$) * VAL(Y$)
220 VTAB 14: PRINT "PADDLE PRODUCT = ";Z
240 GOTO 100
```

Ending The Function

The last problem is to end the function in a normal fashion. You have the opportunity to set the button on the side of the paddles. Usually when the paddle button is not being pushed, a random number is being stored in a particular location in the machine. As soon as the button is pushed, that random value jumps to a number greater than 127. The program can tell the button has been pushed by checking the core location and testing the number that has been stored there. Each paddle button has its own location. For paddle 0 button you can test for a pushed button by PEEK(-16287). To test paddle 1 use PEEK(-16286). In Listing 1 you use the paddle 1 button to end the function. That is, when the value returned by the PEEK is less than 127, you read the paddles; when it is higher than 127, you end the program.

```
240 IF PEEK( - 16286) < 127 THEN 100
250 END
```

Listing 2 is a more elegant form of this function.

Listing 1.

```
10  PRINT "ENTER SCALE MAXIMUM FOR PADDLE 0"
15  INPUT M0
20  PRINT "ENTER SCALE MAXIMUM FOR PADDLE 1"
25  INPUT M1
30  PRINT "HOW MANY DECIMAL PLACES FOR PADDLE 0"
35  INPUT F0
40  PRINT "HOW MANY DECIMAL PLACES FOR PADDLE 1"
45  INPUT F1
50  REM   SET THE ROUNDING PLACE FOR EACH PADDLE
55  K0 = 5 * (1 / 10 ^ (F0 + 1))
60  K1 = 5 * (1 / 10 ^ (F1 + 1))
90  HOME
100 X = PDL (0)
110 X = (255 - X) * M0 / 255
114 REM ROUNDING ALGORITHM FOR PADDLE 0
115 X = INT ((X + K0) * 10 ^ F0) / 10 ^ F0
117 X$ = RIGHT$ ("          " + STR$ (X),8)
120 VTAB 10: PRINT "PADDLE ZERO SETTING = ";X$
140 Y = PDL (1)
145 Y = (255 - Y) * M1 / 255
149 Y = INT ((Y + K1) * 10 ^ F1) / 10 ^ F1
150 Y$ = RIGHT$ ("          " + STR$ (Y),8)
160 VTAB 12: PRINT "PADDLE ONE SETTING = ";Y$
200 Z = VAL (X$) * VAL (Y$)
210 VTAB 14: PRINT "PADDLE PRODUCT = ";Z
220 VTAB 16: PRINT "PRESS PADDLE 1 BUTTON TO END"
230 IF PEEK (-16286) < 127 THEN 100
240 END
```

You can adjust the algorithm for calculations to do many tasks in the laboratory or classroom. For example, the algorithm can be used to input voltage and amperage to calculate the resistance in an Ohms law lab. With a little programming finesse, it can use all four paddle inputs to calculate multiple resistors in series and in parallel circuits. Wattage, density, frequency, wavelength, vector analysis, radioactive decay, percentage composition, pH, calorimetry, and electrochemistry problems may be solved this way.

A Range Finder

Other applications use the paddle directly to measure for problem solving. Students learn how specialized computers are used to solve problems. To illustrate this method, let's look at how the paddles are used to create a "range finder." This device, which cuts across a wide spectrum of curricula, could be part of a study of geology, astronomy, physics, or physical science. The object of a range finder is to determine the distance to an object measured by indirect means.

Listing 2.

```
90  HOME
100 VTAB 3: PRINT "ENTER FULL SCALE READING OF PADDLE 0": INPUT
    "";M0
110 VTAB 8: PRINT "ENTER THE UNITS TO BE ATTACHED TO": INPUT
    "PADDLE 0 VALUES ";U0$
120 VTAB 12: PRINT "WHAT IS THE NUMBER OF DECIMAL PLACES": INPUT
    "ARE TO BE USED FOR PADDLE 0";F0
122 VTAB 16: INVERSE : PRINT "PADDLE 0 TEST": NORMAL
125 VTAB 23: PRINT "PRINT PADDLE BUTTON TO PROCEED"
130 X = PDL (0):P = F0:F = F0: GOSUB 1000
160 VTAB 19: PRINT "PADDLE 0 = ";Z$;" ";U0$
170 IF PEEK (-16287) 127 THEN 130
180 HOME : PRINT "PADDLE 1 CALIBRATION"
200 VTAB 3: PRINT "ENTER FULL SCALE READING OF PADDLE 1": INPUT
    "";M1
210 VTAB 8: PRINT "ENTER THE UNITS TO BE ATTACHED TO": INPUT
    "PADDLE 1 VALUES ";U1$
220 VTAB 12: PRINT "WHAT IS THE NUMBER OF DECIMAL PLACES": INPUT
    "ARE TO BE USED FOR PADDLE 1";F1
222 VTAB 16: INVERSE : PRINT "PADDLE 1 TEST": NORMAL
230 X = PDL (1):P = F1:F = F1: GOSUB 1000
260 VTAB 19: PRINT "PADDLE 1= ";Z$;" ";U1$
270 IF PEEK (-16286) 127 THEN 230
280 HOME : VTAB 3: HTAB 10: INVERSE : PRINT "ANSWER SET": NORMAL
285 VTAB 8: PRINT "WHAT UNITS ARE TO BE USED TO DISPLAY": INPUT
    "THE RESULT ";U2$
290 VTAB 12: PRINT "HOW MANY DECIMAL PLACES ARE TO BE": INPUT
    "IN PRINTING THE RESULT";F2
300 HOME : VTAB 3: HTAB 10: INVERSE : PRINT "PADDLE LAB": NORMAL
330 X = PDL (0):F = F0:P = P0: GOSUB 1000:A$ = Z$
360 VTAB 12: PRINT "PADDLE 0 = ";A$;" ";U0$
450 X = PDL (1):F = F1:P = P1: GOSUB 1000:B$ = Z$
460 VTAB 16: PRINT "PADDLE 1 = ";B$;" ";U1$
500 Y = VAL (A$) * VAL (B$)
510 F = F2:P = P2: GOSUB 1000
550 VTAB 21: PRINT "PRODUCT = ";Z$;" ";U2$
600 IF PEEK (-16286) 127 OR ( PEEK (-16287) 127)
    THEN 330
900 END
1000 X = P * (1255 - X) / 255
1005 R = 1 / 10 ^ F: X = X + R / 2: X = INT (X / R)
1010 Z$ = STR$ ( INT (X / R)) / 10 ^ F)
1015 Z$ = RIGHT$ ("          " + Z$,8)
1020 RETURN
```

APPLE

Apple II E	$1149.00
Apple Monitor III w/ Stand	$ 199.00
Apple Disk II	$ 399.00
Apple 80 Col. Card	CALL
Apple Extended 80 Co. Card	CALL
Apple II E Starter System II E, 80 Co. Card, Monitor III, Monitor Stand, Disk II +, Controller	$1699.00

ACE 1000 w/ color $ 999.00

FRANKLIN

Starter System
Color Computer, AceWriter II, AceCalc, Ace 80 Col. Card, Ace 10 Disk Drive & Controller, 12" Green Screen Monitor ..... CALL

Starter System w/EPSON MX80 III Printer Interface Card and Cable $1829.00
ACE 1200 (1 Disk) . $1799.00
ACE 1200 (2 Disk) . $2199.00

SMITH-CORONA TP-1 DAISY WHEEL PRINTER

TP1-Serial	$445.00
TP1-Parallel	$445.00
Tractor Feed	$129.00

EPSON
EPSON AMERICA, INC.

MX 80 III	$359.00
MX 80 FT III	$499.00
MX 100 III	$599.00
FX 80	$589.00
FX 100	$699.00
RX 80	$369.00

RanaSystems

Elite I	$260.00
w/Controller	$320.00
Elite II	$460.00
w/Controller	$530.00
Elite III	$595.00
w/Controller	$670.00

OKIDATA

ML 80	$ 325.00
ML 82A	$ 389.00
ML 83A	$ 623.00
ML 84P	$ 949.00
ML 84S	$1019.00
ML 92P	$ 489.00
ML 92S	$ 559.00
ML 93P	$ 829.00
ML 93S	$ 899.00
Okigraph I (Specify 82 or 83)	$ 40.00
Okigraph II (For Apple or Franklin)	$ 50.00
Roll Paper Stand For 82A	$ 30.00
Tractor Feed For 82A	$ 50.00

Hayes®

Micro Modem II	$275.00
Micro Modem II w/Terminal Program	$309.00
Smart Modem 300	$239.00
Smart Modem 1200	$529.00

Novation

Applecat II	$269.00
212 Applecat Upgrade	$329.00
BSR Controller	$ 19.00
Handset	$ 29.00
Expansion Module	$ 39.00
*CAT	$150.00
*D-CAT	$170.00
*AUTOCAT	$559.00
*J-CAT	$120.00
*SMART CAT 103	$169.00

*Require RS 232 Interface

STAR MICRONICS INC

STX-80 (Thermal)	$179.00
Gemini 10	$295.00
Gemini 15	$319.00

SILVER-REED
PRINTERS

EXP 500	CALL
EXP 550 Serial	$660.00
EXP 550 Parallel	$630.00
EXP 770	CALL

DOW JONES SOFTWARE™

Market Analyzer

Market Microscope

Market Manager

Connector

CALL FOR PRICING

Prices subject to change without notice (up or down).

MAIL ORDER DIVISION

Carolina Microsystems

For technical support, call 1-803-254-6233. To order, call tollfree: 1-800-845-7077; phone lines open 10:00 am - 6:00 pm Eastern time. For Mastercard or Visa, add 3% service charge. Call today, or send check, money order to Carolina Microsystems, Mail Order Division, Suite 69, 1332 Main Street, Columbia, S C 29201.

S.C. residents add 4% sales tax.

Add 1% for shipping and handling.

CIRCLE 120 ON READER SERVICE CARD

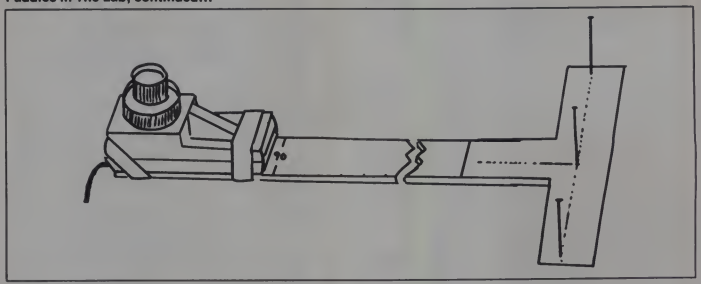

Figure 2. Rangefinder apparatus is constructed from a meter stick, cardboard "T", and game paddle.

Photo 1. Taking a sighting with the rangefinder.

The principle of a range finder is based on trigonometric functions known to every student of elementary algebra. The concept is that "the product of the tangent of the base angle of a right triangle and the base length determines its altitude" (Figure 1).



Figure 1. Relationships in a right triangle.

You need only an angle measuring device and a measured base line. A computer range finder can be constructed by taping a game paddle over the end of a meter stick, ensuring the center of the turning knob is over the one-meter mark (Figure 2). To the other end of the meter stick, fix a T cut from sturdy cardboard. The downstroke of the "T" is carefully taped to the side of the meter stick away from the paddle. Place three sighting pins in the horizontal bar of the T, so they can be used as sights. The middle pin is used to verify the alignment of the paddle to ensure a right angle.



Figure 3. Circular dial marked in degrees fits over knob of paddle.

Cut a circular dial from stiff cardboard and mark it with 0 to 180 degrees counter-clockwise (Figure 3). In the center of the circular card cut a hole that will fit snugly over the paddle knob. Place a sighting pin in the 0 and 180 degree mark. The accuracy of the sighting circle is dependent, in part, on the diameter.

The calibration module must allow for the input of the base length. Check the orientation of the dial sights; reset the card on the knob, so when the angle is measured visually it agrees with the angle projected on the screen. Once the calibration is complete, the measuring module projects the continuous distance from the angle between the base and 90 degrees.

The student sights the target whose distance is to be determined with the T end of the base line. His partner sights along the pins on the dial card to the target, and the screen shows the distance to the target.

The program (Listing 3) is designed in four segments: the menu, the instructions to construct the device, the calibration module, and the use module.

apple discount software

CALSOFT

Personal—Entertainment—Business

SOFTWARE

Low Discount Prices/15% to 25% Discount off List Price
Fast Convenient Service/Same day shipping on most orders
Large Selection of Software/Call or Write for our FREE Catalog!

We have all the latest software—ASK US!
ATARI, IBM PC, CP/M: send for FREE catalog!

***Call Toll Free:** (800) 423-5290 **In California:** (213) 991-9641*

BEAGLE

	List Price	Our Price
DOS Boss	24.00	20.40
Utility City	29.50	25.05
Apple Mechanic	29.50	25.05
Pronto DOS	29.95	25.45
Double Take	34.95	29.70

INCREDIBLE JACK
~~179.00~~ 143.20

BPI SYSTEMS

General Ledger	395.00	316.00
Accounts Receivable	395.00	316.00
Accounts Payable	395.00	316.00

BRODERBUND

★ The Arcade Machine	59.95	44.95
★ Choplifter	34.95	26.20
Serpentine	34.95	29.70
AE	34.95	29.70
★ Bank Street Writer	69.95	52.45
Gumball	29.95	25.45
Lode Runner	34.95	29.70

CONTINENTAL

★ Home Accountant	74.95	56.20
★ CPA Modules #1-4 (each)	250.00	167.50
FCM	99.95	84.95

DECISION SUPPORT

The Accountant	129.00	109.65
The Business Accountant	255.00	204.00

EDU-WARE

Prisoner 2	32.95	26.00
★ Algebra 1-4 (each)	39.95	29.95
Algebra 5 & 6	49.95	42.45
★ Fractions/Decimals (each)	49.00	36.75
PSAT/SAT Word Skills (each)	49.00	41.65

HAYDEN

Orca/M	99.95	84.95
Pie Writer 2.2	149.95	127.45
Sargon II	29.95	25.45

INFOCOM

★ Zork I, II, III (each)	39.95	29.95
★ Deadline	49.95	37.45
Starcross	39.95	33.95
Suspended	49.95	42.45
Witness	49.95	42.45

MICROSOFT

★ Multiplan	275.00	206.25
Typing Tutor II	24.95	21.20
★ Applesoft Compiler	175.00	131.25
Multi-Tool Financial Stmt	100.00	85.00

PENGUIN

	List Price	Our Price
Complete Graphics System	69.95	59.45
★ Graphics Magician	59.95	44.95
Spy's Demise	19.95	16.95
Transylvania	19.95	16.95
Crime Wave	19.95	16.95
The Quest	19.95	16.95

SIERRA ON-LINE

Ulysses	34.95	29.70
Dark Crystal	39.95	33.95
★ Cross Fire	29.95	22.45
★ Screen Writer Professional	199.95	149.95
★ Ultima II	59.95	44.95
Frogger	34.95	29.70
The Artist	79.95	67.95
★ General Manager	229.00	171.75
Jawbreaker	29.95	25.45
Learning with Leeper	34.95	29.70
Dragon's Keep	29.95	25.45
Bop-a-Bet	27.95	23.75
Troll's Tale	29.95	25.45
Sammy Lightfoot	29.95	25.45

SCREENWRITER II
~~129.95~~ 97.45

SIR-TECH

★ Wizardry	49.95	37.45
Knight of Diamonds	34.95	29.70
Legacy of Llylgamyn	39.95	33.95

SOFTWARE PUBLISHING

PFS: Report	125.00	106.25
★ PFS: Graph	125.00	93.25

SPINNAKER

★ Snooper Troops #1, #2 (each)	44.95	33.70
Story Machine	34.95	29.70
★ Delta Drawing	59.95	44.95
Kindercomp	29.95	25.45

STONEWARE

★ DB Master	229.00	171.75
★ DB Master 4.0	350.00	262.50
DB Master Utility Pak #1	99.00	84.15
DB Master Utility Pak #2	99.00	84.15

TG PRODUCTS

★ Joystick	59.95	44.95
Game Paddles	39.95	33.95
★ Select-a-Port	59.95	44.95

XEROX

Sticky Bear Bop	39.95	33.95
Sticky Bear Numbers	39.95	33.95
Sticky Bear ABC	39.95	33.95

SIRIUS SOFTWARE

	List Price	Our Price
Blade of Blackpoole	39.95	33.95
The Joyport	49.95	42.45
Type Attack	39.95	33.95
Repton	39.95	33.95
★ Critical Mass	39.95	29.95
Buzzard Bait	39.95	33.95

PFS: FILE
~~125.00~~ 93.75

SOUTHWESTERN

★ Merlin	64.95	48.70
★ Asci/Express Professional	129.95	97.45
Routine Machine	64.95	55.20
Munch-a-Bug	49.95	42.45
SDS Combo	119.95	101.95

STRATEGIC SIMULATIONS

Computer Quarterback	39.95	33.95
★ Napoleon's Campaigns	59.95	44.95
Road to Gettysburg	59.95	50.95
★ Guadalcanal Campaign	59.95	44.95
Cosmic Balance II	39.95	33.95
Germany 1985	59.95	50.95
Battle for Normandy	39.95	33.95
Galactic Adventures	59.95	50.95
Bomb Alley	59.95	50.95
Epidemic	34.95	29.70
★ Fighter Command	59.95	44.95
RDF 1985	34.95	29.70
★ North Atlantic '86	59.95	44.95
Knights of the Desert	39.95	33.95

VISICORP

★ Visicalc	250.00	193.75
★ Visitrend/Visiplot	300.00	225.00
Visifile	250.00	199.95

IBM PC SOFTWARE

Apple Panic	29.95	25.45
BPI Personal Accounting	195.00	156.00
CDEX Training for Visicalc	69.95	59.45
Crosstalk	195.00	156.00
Data Capture	120.00	102.00
★ dBase II	700.00	525.00
Flight Simulator	49.95	42.45
★ Home Accountant Plus	150.00	112.50
Mastertype	39.95	33.95
Multi-Tool Word	395.00	316.00
Norton Utilities	80.00	68.00
Peachpak (GL/AR/AP)	395.00	316.00
Peachtext 5000	395.00	316.00
Perfect Writer	495.00	396.00
Personal Investor	145.00	123.25
★ PFS: Write	140.00	106.00
Smartcom II	119.00	101.15
Supercalc II	295.00	236.00
TKI Solver	299.00	239.20
★ Wordstar	495.00	371.25

CALSOFT
346 N. Kanan Rd. #103
Agoura, CA 91301

***Call Toll Free:** (800) 423-5290 **In California:** (213) 991-9641*

We accept Mastercard & Visa (include # and Expiration Date), check, COD ($1.50 extra), or Money Order. California residents add 6% sales tax. Include $2.00 for shipping (UPS Blue Label $3.00, Canada $6.00, other foreign countries 10% of order - minimum $10.00).

★ Sale prices are through October only! Prices subject to change without notice.

CIRCLE 126 ON READER SERVICE CARD

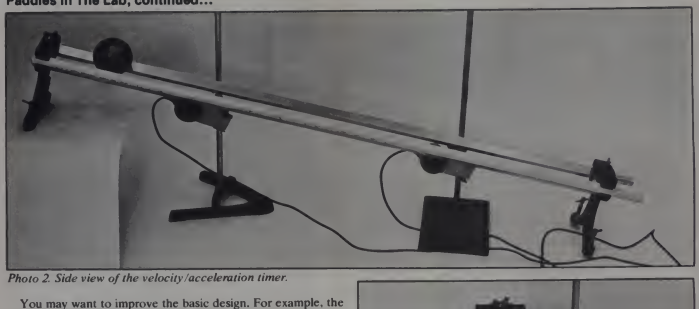

Photo 2. Side view of the velocity/acceleration timer.

You may want to improve the basic design. For example, the sighting pins can be replaced with a mirror, beam splitter, and laser for a more accurate and dramatic demonstration. With some rebuilding, the function could be adapted for both paddles and would use the Law of Sines, eliminating the need for the right triangle.

Measuring Acceleration

Another laboratory use for the game paddles is a reasonably accurate timer to determine the velocity and acceleration of

Listing 3.

```
10  TEXT : HOME : VTAB 1: HTAB 10: INVERSE : PRINT "PADDLE R
    ANGEFINDER LAB": NORMAL : POKE 34,5
11  REM
12  REM   ******  MENU SEGMENT  ******
13  REM
15  POKE 32,5
20  VTAB 8: PRINT "WHICH WOULD YOU LIKE TO DO:"
30  VTAB 10: PRINT "1. GET DIRECTIONS FOR SET-UP"
40  VTAB 12: PRINT "2. CALIBRATE RANGE FINDER"
60  VTAB 14: PRINT "3. USE RANGE FINDER."
70  VTAB 16: PRINT "4. END FOR NOW"
80  VTAB 22: PRINT "ENTER A 1 2 3 OR 4 PLEASE. ";: GET A$:A =
    VAL (A$)
90  ON A GOTO 1000,2000,3000,4000
100  GOTO 80
1000  VTAB 3: HTAB 8: PRINT "DIRECTIONS SEGMENT": POKE 34,4:
    POKE 32,0
1004  REM
1005  REM  ******  DIRECTIONS SEGMENT ******
1006  REM
1010  HOME : PRINT "STEP 1. TAPE PADDLE 0 TO THE END OF A": HTAB
    9: PRINT "METER STICK SO DIAL IS OVER 100": HTAB 9: PRINT
    "CENTIMETER MARK."
1020  PRINT : PRINT "STEP 2. CUT POLAR CORDINATE GRAPH PAPER
    ": HTAB 9: PRINT "GLUED TO STIFF CARDBOARD IN A": HTAB
    9: PRINT "15 CENTIMETER CIRCLE."
1030  PRINT : PRINT "STEP 3. MARK DISK WITH DEGREES STARTING
    ": HTAB 9: PRINT "AT 0 AT 10 DEGREES INTERVALS TO": HTAB
    9: PRINT "90 DEGREES. NUMBER IN A COUNTER": HTAB 9: PRINT
    "CLOCKWISE DIRECTION."
1040  PRINT : PRINT "STEP 4. INSERT SIGHTING PINS IN EDGE OF
    ": HTAB 9: PRINT "OF THE DISK AT THE 0 AND 180": HTAB 9
    : PRINT "DEGREE LOCATIONS."
1050  PRINT : PRINT : HTAB 10: INPUT "PRESS <RETURN> TO CONT
    INUE ";I$
1060  HOME : PRINT "STEP 5. CUT A STRIP OF CARDBOARD 15": HTAB
    9: PRINT "CENTIMETERS LONG AND 2 CENTI-": HTAB 9: PRINT
    "METERS WIDE. PLACE SIGHTING": HTAB 9: PRINT "PINS AT T
    HE CENTER OF THE SHORT": HTAB 9: PRINT "EDGE."
1070  PRINT : PRINT "STEP 6. STAPLE SIGHTING STRIP TO 0 END"
    : HTAB 9: PRINT "OF METER STICK. MAKE SURE THE": HTAB 9
    : PRINT "SIGHTING LINE IS SET AT RIGHT": HTAB 9: PRINT
    "ANGLES TO THE METER STICK."
1080  PRINT : PRINT "STEP 7. CUT HOLE IN THE CENTER OF THE":
    HTAB 9: PRINT "DISK SO IT MAKES A SNUG FIT ON": HTAB 9
    : PRINT "THE PADDLE KNOB."
1090  PRINT : PRINT "STEP 8. CONSTRUCT A REFERENCE PIN IN": HTAB
    9: PRINT "THE CENTER OF THE METER STICK.": HTAB 9: PRINT
    "AT THE EDGE OF THE DIAL TO MARK": HTAB 9: PRINT "ANGLE
    S."
1100  HTAB 22: INPUT "PRESS <RETURN>";$%
1110  GOTO 10
```

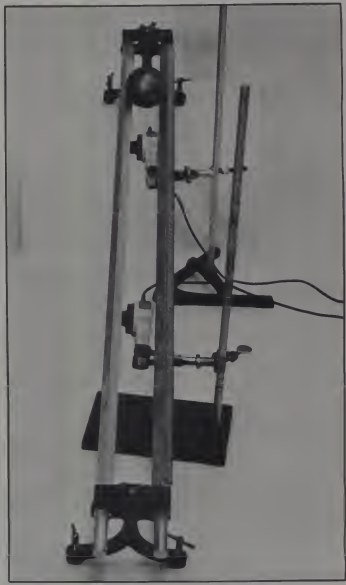

Photo 3. Only the paddle buttons are used in the velocity/acceleration timer. The ball must be heavy enough to activate them.

HARMONY VIDEO & COMPUTERS
800-221-8927

JVC ● PANASONIC ● SONY PROFEEL ● ZENITH ● HITACHI ● QUASAR

G.E. ● SANYO ● SONY PROJECTION ● TDK ● MAXELL ● FUJI ● SCOTCH ● SONY ● RCA

COMMODORE	
VIC 20	79.95
COMMODORE 64	189.95
VIC 2N DATASETTE	54.95
COMMODORE DISC DRIVE	197.95
1525P PRINTER	197.95
COMMODORE MONITOR	209.95
VIC TELEPHONE MODEM	67.95
102 BASIC PROGRAM	35.95
FLOPPY DISCS SS/DD	14.95
VIC 8K MEMORY PAC	39.95
VIC 16K MEMORY PAC	84.95
DISC LIBRARY	14.95
VIC 3K SUPER EXPANDER	64.95
1212 PROGRAMMER'S AID	59.95
JOYSTICK	10.00
INTRO TO BASIC I & II	69.95

APPLE 2 PLUS
999.95

APPLE DISC 2
319.95

EPSON
MX 80 PRINTER
399.95

OKIDATA
92A PRINTER
499.95

ATARI	
ATARI 400 W16K	69.95
ATARI 800 W48K	249.95
ATARI 1200 XL W64K	349.95
ATARI 410 RECORDER	69.95
ATARI 1010 RECORDER	73.95
ATARI NEW 1050 DISC DRIVE	349.95
ATARI 830 ACOUSTIC TEL. MODEM	139.95
ATARI 800 XL	CALL
ATARI 800 XL	CALL
ATARI 1400 XL	CALL
ATARI 1450 XL	CALL
ATARI 16K MEMORY EXPANDER	84.95
ATARI JOYSTICK	10.00
ATARI PROGRAMMER KIT	49.95
ATARI 1020 40 COL PRINTER	199.95
FLOPPY DISCS SS/DD	14.95

WE CARRY A FULL LINE OF SONY TV & PROFEEL

SONY KV 1313	299.95	SONY KV 1917	399.95	SONY KV 1746	439.95	SONY 1901 PROFEEL	529.95
SONY KV 1222	349.50	SONY KV 1918	399.95	SONY 2501 PROFEEL	929.50	SONY KV 2654	659.95

SEND $2.00 FOR LATEST CATALOGUE

ALL VCR's IN STOCK CALL FOR LOWEST PRICES

VIDEO TAPE (By case of 10 only)

	VHS T120	VHS T160	HIGH GRADE	BETA L500	BETA L750	BETA L830
TDK	8.25	11.75	10.25	6.50	7.99	9.25
FUJI	8.50	14.75	11.75	6.50	7.99	
MAXELL	8.25	11.75	10.25	6.50	7.99	9.25
MEMOREX	8.25	11.75	10.10	6.50	7.99	9.25
SCOTCH	7.99	11.75	9.95	6.50	7.99	
SONY			10.25	6.80	7.85	9.25
JVC	8.15	11.75	10.35			
RCA	7.55					
PANASONIC	7.25					

TDK PROFESSIONAL T120	15.95
MAXELL PROFESSIONAL L750 OR T120	15.95
SCOTCH PROFESSIONAL	14.95

FOR THE LOWEST PRICES ON VIDEO CALL 800-221-8927

To order simply dial toll free 800-221-8927 with your Master Card or VISA and your order will arrive via UPS or send certified check or money order only to: HARMONY VIDEO AND ELECTRONICS, 2357 Coney Island Ave., Brooklyn, N.Y. 11223, and add approximate shipping postage and insurance charges. Credit cards for phone order only. For customer service please dial (212) 627-8960. All pries and availability subject to change without notice. All orders shipped out of state. Dealer inquires invited!!! For sales info dial (212) 627-6989. Open Sun. 10-4 Mon.-Thur. 9-7 Fri. 9-3.

800-221-8927

COMMODORE ATARI APPLE TEXAS INSTRUMENTS EPSON

CIRCLE 175 ON READER SERVICE CARD

```
2997  REM
2998  REM   *****  RANGE FINDER SEGMENT  *****
2999  REM
3000  POKE 32,0: HOME : VTAB 5: HTAB 5: PRINT "PRESS PADDLE
      BUTTON TO TERMINATE"
3002  REM
3003  REM  ** READ PADDLE BUTTONS FOR END OF USE  **
3100 B1 = PEEK ( - 16286)*80 + PEEK ( - 16287)
3102  REM
3103  REM  ** RETURN TO MENU IF BUTTON ACTIVATED **
3110  IF (B1 < 127) OR (B0 < 127) THEN 10
3112  REM
3113  REM  ** READ PADDLE 0 AND CONVERT TO DEGREES **
3120 X = PDL (0):P0 = 232 - 232 * (255 - X) / 255:A0$ = " RIGHT$
      (" " + STR$ ( INT (.5 + P0)),4)
3130  VTAB 10: HTAB 5: PRINT "PADDLE 0 ANGLE IS";A0$;" DEGR
      EES"
3135 D$ = RIGHT$ (" " + STR$ (D1$),4)
3140  VTAB 13: HTAB 5: PRINT " BASE LENGTH IS ";D$;" METER
      S"
3142  REM
3147  REM  ** DETERMINE TANGENT OF PADDLE AND CHANGE **
3148  REM  ** RADIANS TO DEGREES **
3149  REM
3150 TA = TAN (P0 * 3.141592#8 / 180)
3160  IF P0 = 0 OR P0 > 89 THEN 3300
3162  REM
3163  REM  ** DETERMINE ALTITUDE AND ROUND FOR PRINTING **
3164  REM
3170 L = D1$ * TA: L0 = INT (L) * 10 + INT (100 * (L) - 10
      * INT (L)) / 10: A$ = LEFT$ ( STR$ (L0) + ".0",2)
3180  VTAB 19: PRINT "DISTANCE TO TARGET IS ";A$;"METERS.": GOTO
      3100
3300  VTAB 19: PRINT "DISTANCE TO TARGET IS OFF SCALE  ":
      GOTO 3100
3997  REM
3998  REM   **** END SEGMENT  *****
3999  REM
4000  POKE 32,0: POKE 34,0: HOME : END
```

Photo 4. Side view of the joystick pendulum.

moving bodies. If paddle 0 is attached between the rails of an inclined plane and paddle 1 is attached a measured distance down slope, a ball can be used to turn the timer on and off. The program can be modified to measure the acceleration directly. The program below could be used as a timer. Of course, you may want to adjust the delay loop in line 90 for your system.

Joystick Pendulum

A favorite laboratory apparatus uses the joystick as a pendulum. In this case the device is turned upside-down and placed in a long-armed ring stand. A sturdy mass is attached to the handle and it is allowed to swing freely. Inventive students will want to reduce the influence of friction by modifying the joystick and within limits this should be encouraged. Because Basic is generally not fast enough to do the plotting, the program shown in Listing 4 uses a shape table to do the tracing.

Listing 4.

```
10 BASE = 6 * 4096
20 FOR I = BASE TO BASE + 8
30 READ A: POKE I,A: NEXT I
40 POKE 232,0: POKE 233,96
50 HGR: HCOLOR= 3: ROT= 0: SCALE= 2
60 X = PDL (0)
65 IF PEEK ( - 16287) > 127 THEN 50
67 IF PEEK ( - 16286) < 127 THEN END
70 Y = PDL (1)
75 IF Y > 190 THEN Y = 190
80 XDRAW 1 AT X,Y
100 GOTO 60
110 DATA 1,0,4,0,33,43,48,57,0
```

Summary

I have suggested a few of the uses for paddles in the laboratory and classroom, and invite readers to refine and extend the concept. I have found that students who are equipped with beginning programming skills and an interest in engineering can design ways to use the paddles in other useful measuring instruments such as tone generators, sine wave generators, interferometers, and so forth. Using the computer in the classroom to solve this type of problem helps students to understand the meaning of the "computer revolution." □



Photo 5. The joystick pendulum looking up from the bottom.

Programming a computer is child's play.

No matter what your age, now you can program your own Apple II with Terrapin™ Logo. It's a sophisticated and powerful language that the most advanced programmer will appreciate. Yet children and adults alike will find it fun and easy to use.

Terrapin™ Logo promotes structured and logical thinking. It encourages you to break problems into small steps, and then solve them individually.

There are no wrong answers or mistakes, only logical statements that help make the program work.

Every copy of Terrapin™ Logo comes with complete documentation. To run the language, a 48K Apple II+ with a 16K RAM card and one disk drive are required. Terrapin™ Logo also runs on the Apple IIe and Franklin computers.

Terrapin also offers books about Logo, including: Mindstorms, Logo for the Apple II, Learning with Logo, Turtle Geometry, and Special Technology for Special Children.

Terrapin™ Logo. The only language that makes computer programming child's play. Even if you're not a child.

To order or for more information, call or write:

Terrapin, Inc.
380 Green Street
Cambridge, MA 02139
(617) 492-8816
Dealer inquiries invited.

CIRCLE 264 ON READER SERVICE CARD

2 chips ... are better than one

Is your Apple's 6502 processor chip a little overworked lately? Have you been eyeing one of those new, 16-bit systems? But you don't want to give up all your Apple programs.

Add the powerful 16-bit 8088 processor to your Apple with ALF's Processor Card. Let the 6502 and 8088 work together to tackle your toughest problems—like speeding up your Applesoft and Apple Pascal programs. With the Processor Card, you can use the CP/M®-86 or MS-DOS™ operating system to run the latest 16-bit software, including many IBM PC programs.

64K or 128K of high-speed memory is available for ALF's Processor Card. Use the Processor Card with 128K as a fast disk emulator or to view sixteen hi-res images in under a second. Or run Basic, C, COBOL, or Pascal with 16-bit performance!

The ALF Processor Card is just $395 (Applesoft speed-up software included). See your Apple dealer today, or contact ALF for more information.

Trademarks: Apple Apple Computer CP/M Digital Research MS-DOS Microsoft

ALF

ALF Products, Inc.
1 [illegible] Drive, CO 80[illegible]5
(303) [illegible]-[illegible] • Telex 4901[illegible]

computer mail order

TeleVideo

TERMINALS

910	$559.00
912	$669.00
920	$739.00
925	$719.00
950	$929.00
970	CALL

COMPUTERS

800A	$1099.00
802	$2899.00
803	$1949.00
803H	$4695.00
806/20	$4999.00
816/40	$9199.00
1802	$3399.00
1803	CALL

MODEMS

HAYES

Smart	$219.00
Smart 1200 (1200 Baud)	$519.00
Chronograph	$199.00
Micromodem 100	$309.00
Micromodem II	$279.00
Micromodem II (with term)	$299.00
Smart Com II	$99.00
Smart 1200B	$469.00

NOVATION

J-Cat	$119.00
Cat	$144.00
D-Cat	$159.00
103 Smart Cat	$169.00
Apple Cat II	$279.00
103/212 Smart Cat	$439.00
212 Apple Cat II	$609.00
Apple Cat 1212 Upgrade	$309.00

ANCHOR

Mark I (RS 232)	$79.00
Mark II (Atari)	$79.00
Mark III (T. I. 99)	$109.00
Mark IV (CBM-PET)	$125.00
Mark V (Osborne)	$95.00
Mark VI (IBM-PC)	$179.00
Mark VII (Auto Ans/Auto Dial)	$219.00
Mark VIII	$269.00
TRS-80 Color Computer	$99.00
9 Volt Power Supply	$9.00

EAGLE

IIE-1	$1369.00
IIE-2	$1649.00
IIE-3	$2399.00
IIE-4	$3199.00
PC-E	$1579.00
PC-1	$2399.00
PC-2	$2799.00
PC-XL	$3599.00
1620	$3599.00
1630	$5499.00
1640	$6499.00
Cyma Software	CALL

MONITORS

AMDEK

300G	$149.00
300A	$159.00
310A	$169.00
Color I	$279.00
Color I plus	$299.00
Color II	$399.00
Color III	$349.00
Color IV	$999.00

USI

Pi 1, 9" G	$99.00
Pi 2, 12" G	$119.00
Pi 3, 12" A	$159.00
Pi 4, 9" A	$139.00
1400 Color	$299.00

ZENITH

ZVM 121	$95.00
ZT1 Terminal	$369.00

SMC

12" Green	$65.00
9191 13" Color	$299.00

TAXAN

12 N Green	$129.00
12 A Amber	$139.00

PANASONIC

TR 120 Hirres. Green	$159.00
CT 180 Dual Mode Color	$299.00

NEC

JB 1280	$119.00
JB 1201	$149.00
JC 1212	$299.00
JC 12-202	$299.00
JC 1203	$469.00

GORILLA

12" Green	$69.00

IBM

NEC 3550 PRINTER... $1795

PERCOM/TANDOM DRIVE

5¼" 320K Floppy	$279.00
10 Meg Hard	$1495.00

AMDEK

310A Amber Monitor	$169.00
DXY 100 Plotter	$599.00
Color II	$399.00

AST

Combo Plus	CALL
Mega Plus	CALL
Mega Pack	CALL
I/O Plus	CALL

PROFESSIONAL SOFTWARE

PC Plus Word Processing	$319.00

MICRO PRO

Word Star/Mail Merge	$319.00
InfoStar	$299.00
Spell Star	$159.00
CallStar	$139.00

MICROSTUF

Crosstalk	$139.00

MICROSOFT

Multiplan	$199.00

ASHTON-TATE

dBase II	$419.00

IUS

EasyWriter II	$209.00
EasySpeller	$129.00
EasyFiler	$129.00

CONTINENTAL

SOFTWARE

1st Class Mail/Form Letter	$69.00
The Home Accountant Plus	$109.00

SYNAPSE

File Manager	$119.00

LOTUS

123	$369.00

PFS

	APPLE	IBM
File	$69.00	$99.00
Report	$89.00	$89.00
Graph	$89.00	$99.00
Write	n/a	$99.00

KRAFT

IBM Joystick	$55.00
IBM Paddles	$39.00

QUAD RAM ..... CALL

SANYO

SANYO

MBC 555	$795.00
MBC 1000	$1399.00
MBC 160 Orive	$539.00
PRS500 Letter Quality Printer	$699.00

PRINTERS

EPSON

MX80 FT, MX100	CALL
RX80	CALL
FX80, FX100	CALL

OKIDATA

62, 63, 84	CALL
92, 93	CALL

STAR

Stx 80	$169.00
Gemini 10	$299.00
Gemini 15	$479.00
Serial Board	$75.00

SMITH CORONA

TP 1	$469.00
TP 2	CALL
Tractor Feed	$129.00

C.ITOH

Gorilla	$209.00
Prowriter 6510P	$379.00
Prowriter 1550P	$689.00
Starwriter F10 40P	$1149.00
Printmaster F10 55P	$1569.00
Tractor Feed	$109.00

DIASYWRITER

2000 Letter Quality	$1149.00
2500 "Hot Wire"	CALL
Tractor Feed	$109.00

DIABLO

620	$949.00
630	$1769.00

IDS

Call for ALL Configurations on IDS PRISM PRINTERS

NEC

8023	$399.00
7710/7730	$2149.00
3510/3530	$1549.00

HEWLETT PACKARD



HP 41CV... $209.00

HP 75..... $749.00

HP 41C	$146.00
HP 10C	$52.00
HP 11C	$69.00
HP 12C	$92.00
HP 15C	$92.00
HP 16C	$92.00

For HP41/41CV

HPIL Module	$99.00
HPIL Cassette or Printer	$359.00
Card Reader	$144.00
Extended Functions Module	$54.00
Time Module	$54.00

TI-40 COMPACT COMPUTER $219

TIMEX SINCLAIR $39.95 1000

16K Memory	$44.95
2040 Printer	$99.95
Vu-Calc	$17.95
Check Book Manager	$13.95
Organizer	$14.95
Budgeter	$13.95
Stock Option	$14.95
Loan & Mortage Amortizer	$12.95
Mindware Printer	$99.00

SHARP



PC-1500A POCKET COMPUTER $169.00

PC-1250A	$89.00
125 Printer/Micro Cassette	$129.00
150 Printer/Plotter/Cassette	$172.00
151 4K RAM	$55.00
152 Cassette Recorder	$62.00
155 6K RAM	$94.00
156 8K RAM Battery	$129.00
161 16K RAM	$139.00

CABLES & CONNECTIONS

PRINTER CABLES

Atari to Parallel	$29.00
Atari to Serial	$29.00
Apple to Parallel	$69.00
Apple to Parallel/Graphics	$99.00
Apple to Serial	$89.00
IBM to Parallel	$35.00
IBM to Serial	$29.00
Parallel to Parallel	$29.00
Serial to Serial	$29.00
Grappler Plus	$129.00
PKASO	$139.00
Atari to Modem Cable	$29.00
CBM 64 to IEEE Board	$79.00
Apple 80 Column Card	$159.00
CBM Pet to Parallel	$99.00
CBM Pet to Serial	$69.00

READY FORMS

1or2 Address Labels(Tract Feed)	$9.95
15 Report Paper(Tract Feed)	$24.95
8½ Blnk Wht Paper(Tract Feed)	$19.95

computer mail order west

PHONE ORDERS ONLY

800-648-3311

In NV call (702)588-5654 Order Status Number: 588-5654

Dept.1008 P.O. Box 6689, Stateline, NV 89449

No risk, no deposit on C.O.D. orders. Pre-paid orders receive free shipping within the UPS Continental United States with no waiting period for certified checks or money orders. Add 3%(minumum $3.00) shipping and handling on all C.O.D. orders and credit card orders. Larger shipments may require charges. NV and PA residents add sales tax. All items subject to availability and price change. NOTE: We stock manufacturer's and third party software for most all computers on the market. Call today for our new catalog.

computer mail order

FRANKLIN

ACE 1000 Color Computer
ACE 1100 Drive & Cover for ACE 1000
ACE 1200 Computer with Disk Drive
ACE PRO PACK
ACE 1000, Disk Drive, 80 Column Card, ACECalc & ACEWriter II

MICRO-SCI
Apple & Franklin

A2	$249.00
A40	$349.00
A70	$459.00
C2 Controller	$79.00
C47 Controller	$89.00

RANA

Elite I (Apple/Franklin)	$279.00
Elite II (Apple/Franklin)	CALL
Elite III (Apple/Franklin)	CALL

VISICORP
FOR APPLE, IBM & FRANKLIN

visidex	$169.00
Visible	$159.00
Visiplot	$159.00
Visiterm	$89.00
Visitrend/Plot	$229.00
VisiSchedule	$229.00
Desktop Plan	$179.00
Visicalc (Apple, CBM, IBM)	$179.00

Visicorp prices for IBM may vary slightly

LJK

Letter Perfect Apple	$109.00
Data Perfect Apple	$75.00

AXLON

Apple/Franklin 128K Ram	$299.00
Apple/Franklin Ram Disk	$729.00

MPC

Buddisk (128K Non-Volitare)	$649.00

JOYSTICKS
WICO

Joystick	$21.95
Famous Red Ball	$23.95
Power Grip	$21.95
Three Way Deluxe	$22.95
Atari/VIC Trackball	$34.95
Apple Trackball	$59.95

KRAFT

Atari Single Fire	$13.00
Atari Switch-Hitter	$18.00
Apple Joystick	$44.00
Apple Paddles	$39.00

commodore

CBM 8032 $599

CBM64 ..... $229
VIC 20 ..... $99
CALL ON
Executive 64 Portable

1520 Color Printer/Plotter	$189.00
1525 80 Column Printer	$219.00
1526	$319.00
1530 Datasette	$69.00
1541 Single Disk Drive	$249.00
1600 VIC Modem	$59.00
1650 AD/AA Modem	$69.00
1701 14 Color Monitor	$249.00
Pet 64	$589.00
Pet 4032	$599.00
CBM 8032	$599.00
Super Pet	$999.00
B128-80	$789.00
BX256-80	$989.00
2031	$299.00
4040	$699.00
8050	$949.00
8250	$1199.00
9060	$1999.00
9090	$2199.00
4023	$379.00
8400	$1399.00
64K Upgrade	$289.00
Spell Master	$149.00
C Ram	$549.00
Silicon Office	$749.00
The Manager	$209.00
Sott Rom	$129.00
Jinsam	CALL

PROFESSIONAL SOFTWARE

Word Pro 2 Plus	$159.00
Word Pro 3 Plus	$189.00
Word Pro 4 Plus	$279.00
Word Pro 5 Plus	$279.00
WordPro	$179.00
Administrator	$399.00
Power	$79.00
Word Pro 64 Plus	$65.00

CAROCO

Light Pen	$32.00
Cassette Interface	$29.00
Parallel Printer Interface	$89.00
3 Slot Expans. Interface (20)	$32.00
6 Slot Expans. Interface (20)	$79.00

ATARI HOME COMPUTERS

16K ATARI 400

$79.00 ATARI 400
-$50.00 REBATE FROM ATARI
$29.00
+$100.00 410 PROGRAM RECORDER
$129.00 TOTAL PACKAGE PRICE
16K 600 XL $149

$ 29.00* *PACKAGE PRICE AFTER REBATE

CALL FOR PRICING ON THE ENTIRE XL ATARI LINE!

1010 Program Recorder	$74.00
1020 40 Col Printer/Plotter	$249.00
1025 80 Col Printer	$449.00
1027 Letter Quality Printer	$299.00
1050 Disk Drive	$379.00
850 Interface	$189.00
1030 Direct Connect Modem	CALL
CX30 Paddles	$12.00
CX40 Joystick	$8.00
CX42 Remote Joystick	CALL
CX77 Touch Tablet	$69.00
CX80 Trak Ball	$49.00
CX85 Keypad	$105.00
CX418 Home Manager	$89.00
CX488 Communicator II	$229.00
KX/ONE Atari Accountant	$209.00
KX7101 Entertainer	$69.00
KX7102 Arcade Champ	$75.00

ALIEN

Atari Voice Box	$119.00
Apple Voice Box	$149.00

MEMORY

Axlon 32K Ram	$59.00
Axlon 48K Ram	$99.00
Axlon 128K Ram	$299.00
Intec 32K Board	$59.00
Intec 48K Board	$85.00
Intec 64K Board (400 only)	$99.00
Intec Real Time Clock	$39.00

INNOVATIVE CONCEPTS

Flip-n-File 10	$4.00
Flip-n-File 50	$19.00
Flip-n-File 400-800 Cart	$19.00

PERCOM

DISK DRIVES FOR ATARI

AT88-S1	$369.00
AT88-A1	$299.00
AT88-S2	$569.00
AT88-S1 PD	$489.00
AT88-S2 PD	$669.00
AT86-DDA	$139.00
AT44-S1	$579.00
AT44-S2	$969.00

TEXAS INSTRUMENTS DRIVE

TX 99/S1	$349.00

RANA

1000 Atari Disk Drive	$319.00

FLOPPY DISKS
MAXELL

MD-1	$32.00
MD-2	$44.00
FD-1(8)	$40.00
FD-2(8 DD)	$50.00

ELEPHANT

5¼ SS SD	$18.95
5¼ SS DD	$24.95
5¼ DS DD	$29.95

VERBATUM

5¼ SS DD	$28.00
5¼ DS DD	$38.00

HEAD

Disk Head Cleaner	$14.95

C.M.O. TOP 80

APPLE/FRANKLIN

1. Choplifter	$27.00
2. Bank Street Writer	$55.00
3. PFS: File	$89.00
4. Visicalc	$179.00
5. Home Accountant	$55.00
6. Zaxxon	$29.00
7. Most Amazing Thing	$28.00
8. Visitrle	$169.00
9. Fathoms 40	$19.00
10. Deadline	$35.00
11. PFS: Report	$69.00
12. Zork III	$29.00
13. Frogger	$24.00
14. Facemaker	$24.00
15. Snooper Troops #1	$32.00
16. Delta Drawing	$35.00
17. Castle Wolfenstine	$24.00
18. Waypot	$29.00
19. Canyon Climber	$19.00
20. Bandits	$28.00

CBM 64

1. Word Pro 64	$65.00
2. Jumpman	$29.00
3. Gort (20/64)	$14.95
4. Microspec Data Base 64	$89.00
5. Logo 64	$39.00
6. Microspec Gen. Ledger 64	$79.00
7. Zork III	$29.00
8. Frogger (64)	$23.00
9. Quick Brown Fox (20/64)	$49.00
10. Shamus	$29.00
11. Deadline	$29.00
12. Assembler 64	$14.95
13. Zork II	$29.00
14. 3-D Man	$14.00
15. Protector	$32.00
16. Starcross	$29.00
17. Easy Mail 64	$14.95
18. Grave Robber	$11.00
19. Wall Street	$19.00
20. Trash Man	$32.00

ATARI

1. Donkey Kong	$39.00
2. Zaxxon	$29.00
3. E.T. Phone Home	$39.00
4. Miner 2049er	$35.00
5. Dig Dug	$33.00
6. Choplifter	$27.00
7. Donkey Kong, Jr.	$39.00
8. Canyon Climber	$25.00
9. Snooper Troops #2	$34.00
10. Word Wizard	$59.00
11. Picnic Paranoia	$34.00
12. Jumpman	$29.00
13. Shamus	$34.00
14. Letter Perfect	$109.00
15. File Manager 800	$69.00
16. Preppie	$24.00
17. Astro Chase	$25.00
18. Blue Black Hole	$27.00
19. Pac Man	$33.00
20. Baja Buggies	$25.00
21. Crush, Crumble & Chomp	$24.00
22. Waypot	$27.00
23. Zork III	$29.00
24. Visicalc	$159.00
25. Atari Writer	$79.00
26. Three Little Pigs	$25.00
27. Upper Reaches of Apshai	$18.00
28. Starboxil Football	$24.95
29. Dreibs	$26.00
30. Protector	$34.00
31. Frogger	$25.00
32. Lunar Leaper	$24.00
33. Wizard of Wor	$34.00
34. Kindercomp	$21.00
35. Moon Shuttle	$22.00
36. Home Accountant	$55.00
37. Temple of Apshai	$29.00
38. Spell Wizard	$39.00
39. Nautilus	$28.00
40. O Riley's Mine	$22.00

computer mail order east

PHONE ORDERS ONLY

MasterCard

800-233-8950

In PA call (717)327-9575 — Order Status Number: 327-9576

Dept.1008 477 E. 3rd St., Williamsport, PA 17701

INTERNATIONAL ORDERS: All shipments outside the Continental United States must be pre-paid by certified check only. Include 3% (minumum $3.00) shipping and handling. EDUCATIONAL DISCOUNTS: Additional discounts are available from both Computer Mail Order locations to qualified Educational Institutions.
APO & FPO: Add minimum $5.00 shipping and handling.

CIRCLE 135 ON READER SERVICE CARD

HTURTLE Revisited

John and Mary Harrison

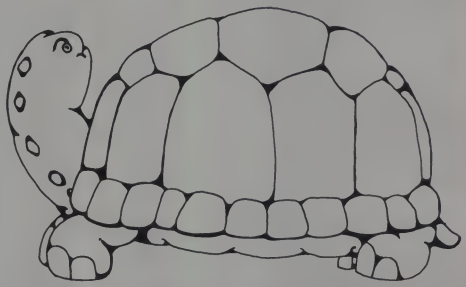

Ever since reading "HTURTLE: A Turtlegraphics Interpreter in Applesoft" by Al Evans in the July 1982 issue of Creative Computing, I have been fascinated by the idea of using Turtlegraphics in Atari Basic. The major drawback has been the limited number of colors available in the high-resolution modes. Graphics modes 7 and 8 offer respectable resolution (160 × 160 and 320 × 160, respectively) but only four colors in mode 7 and one in mode 8. Enter the GTIA chip and enhanced graphics modes 9, 10, and 11.

These three additional modes give the capability of up to 16 colors on the screen and a resolution of 80 × 192. However these modes are "map" modes and as such offer no provision for a text window. Through the use of a display list interrupt (DLI) a four-line text window has been provided in graphics mode 11. Thus, a suitable environment exists for implementing a Turtlegraphics interpreter in Atari Basic.

Using this expanded capability, I have converted the original Applesoft code to Atari Basic and added three features to the interpreter. The EDIT command deletes the last entered command and erases it from the screen. The PROGRAM command allows a series of commands to be strung together and then executed by the GO command. A HELP function was added to list the commands available. Each of these is more fully described below.

Listing 1 is HTURTLE for the Atari. It functions similarly to the HTURTLE described in the Al Evans article. The maximum X value is 79 and the maximum Y value is 53. The origin (0,0) is located at the bottom left corner of the screen. The Y value of 53 is corrected to allow for similar distances to be covered by a one-unit move in the X or Y direction. The Y value is multiplied by 3 in the program to make this correction and show the full 160-line resolution.

The turtle understands the following commands:

CLEAR: Clears the screen and text window and resets the turtle to the center of the screen (40,26) heading north (0).

COLOR AVAR: Sets one of the eight available colors as the pencolor. Possible values for AVAR are black, orange, pink, purple, blue, turquoise, green, and yellow.

TURN ANGLE: Tells the turtle to turn ANGLE degrees. Positive values are clockwise, negative values are counterclockwise.

TURNTO ANGLE: Tells the turtle to turn to the direction ANGLE.

MOVE DISTANCE: The turtle moves DISTANCE in the direction he is facing. If color is not black, a line is drawn.

MOVETO X,Y: The turtle moves to the specified coordinates. If color is not black, a line is drawn.

TURTLEX: Reports the turtle's current X coordinate.

TURTLEY: Reports the turtle's current Y coordinate.

TURTLEANG: Reports the direction the turtle is facing.

PROGRAM: Stores a sequence of commands. The prompt changes from ? to *? when in the program mode. All other commands may be issued after the PROGRAM command.

GO: Executes the stored sequence of commands. Once the program mode is exited, the program is no longer stored, so GO has no effect.

QUIT: Leaves the interpreter or the program mode, if active.

HELP: Lists the commands for easy reference.

EDIT: Deletes the last command and erases it from the screen. May not be issued twice in succession.

How The Program Works

HTURTLE has three main parts: the initialization routines, the command

John and Mary Harrison, 1223 Patrick Ln., Newport News, VA 23602.

Lee McFadden makes learning to use your computer and its programs an easy, rewarding experience.

Mastering a new system or even a new program is not easy. It takes a lot of study, a lot of trial and error, a lot of back-and-forth between dense manuals and your computer. Wouldn't it all be so much easier if you had a knowledgeable friend sitting by your side?

Lee McFadden is that friend. He's been producing widely acclaimed teaching tapes for over ten years. He knows what information you need, and exactly when you need it. Team his skill with the know-how of technical experts, and you get a faster, easier way to master your computer and all its power.

Patented Audio Cassettes

Lee guides you patiently, step-by-step, while you're sitting at your keyboard. No connection between the computer and your cassette player is necessary. You learn by *doing*, instead of by reading. And even the tapes are special—a patented FlipTrack system lets you go at your own pace, covering as much or as little detail as you want.

Ideal for Training

Use the courses over and over again. Share them with friends, family, students and staff. Make "computer literacy" a reality in your local schools. Bring a new employee "up to speed" in just hours, instead of weeks. The fully indexed Guide included with each course is, by itself, an invaluable, on-going reference.

HOW TO USE WORDSTAR
HOW TO OPERATE THE APPLE III
HOW TO OPERATE THE IBM PERSONAL COMPUTER
HOW TO USE VISICALC
HOW TO OPERATE THE APPLE II

Moneyback Guarantee

You may order any of the FlipTrack courses from us on a 15-day "right of return" basis. Try a lesson or two yourself. Share them with others. If you're not delighted at how quickly and easily you begin to learn, simply return the program in its original condition for a full refund. No questions asked.

How to Order

Drop by your local dealer for a demonstration. Or Visa and MasterCard holders may add $2.50 shipping and handling to the prices, and order toll-free:

1-800-227-1617, Ext. 439

(In California, call 1-800-772-3545, Ext. 439.)

Choose from these rewarding courses:

How to Operate the Apple II* (specify "e" or "Plus")
3 audio cassettes & Operator's Guide $49.95

How to Operate the Apple///*
4 audio cassettes, 1 diskette & Operator's Guide. . $95.00

How to Operate the IBM PC*
3 audio cassettes & Operator's Guide $49.95

How to Operate Your Computer Under CP/M*
3 audio cassettes & Operator's Guide $49.95

How to Use VisiCalc*
4 audio cassettes & Lesson Summary . . $65.00

How to Use WordStar*
3 audio cassettes & User's Guide $49.95

Learn by listening to a friend.

FlipTrack®
Learning Systems

A Division of Mosaic Media, Inc.
526 N. Main St., Dept. CT-B
Post Office Box 711
Glen Ellyn, IL 60137
312-790-1117

FlipTrack is a registered trademark property of Mosaic Media Inc
Apple is a registered trademark of Apple Computer Inc
IBM Personal Computer is a registered trademark of IBM Corp. CP/M is a registered trademark of Digital Research Inc
VisiCalc is a registered trademark of VisiCorp. WordStar is a registered trademark of MicroPro International Corp

CIRCLE 178 ON READER SERVICE CARD

Table 1. Variables Used.

CH$(30)	Entered command
COLR$(100)	String of available colors
CLLR(8)	Number corresponding to color word in COLR$
PAR$(10)	Argument of entered command
NUM1$(5)	First value of a two-number parameter
NUM2$(5)	Second value of a two-number parameter
COM$(10)	Placeholder for data as CMD$ and COLR$ are built
PROGRAM$(1025)	String containing "program"
CMD$(150)	String of available commands
EDPAR$(10)	Parameter of command to be erased
EDNUM1$(5)	First argument of command to be erased
EDNUM2$(5)	Second argument of command to be erased
EDIT	Flag for EDIT command
TCH	Length of entered command
CASE	Number of entered command
EDCASE	Number of command for editing
PROG	Flag for PROGRAM command
NC	Number of available commands
XEQ	Flag for GO command
TX	Turtle's X position
OLDTX	Previous X position
TY	Turtle's Y position
OLDTY	Previous Y position
TA	Turtle's angle
OLDTA	Previous turtle angle
SCOL	Number of color to be displayed
OLDSCOL	Color number to be edited
TWOPI	Value of 2 in degrees, i.e. 360
EDIS	Distance to be erased
ELDX	Initial X position to be erased
ELDY	Initial Y position to be erased
EDX	Final X to be erased
EDY	Final Y to be erased
ETX	Actual X distance to be erased
ETY	Actual Y distance to be erased
DIST	Distance turtle will move
DX	Distance turtle will move in X direction
DY	Distance turtle will move in Y direction
MARKGO	Beginning of command being parsed from PROGRAM$

parser, and the subroutines for each of the commands. Table 1 is a list of all variables used in the program.

The initialization routines (lines 60-100, 10000-11080) set the trigonometric functions to accept degrees rather than radians, dimensions all arrays and string variables, stores the allowable commands in CMD$, stores the available colors in COLR$, and sets up the graphics display (lines 10120-10160). This setup is the only interesting portion of the initialization routine.

The screen is initialized by a graphics 8 call. This provides 320 × 160 resolution plus a four-line text window at the bottom of the screen. Placing 11 in memory address 87 and 192 in memory address 623 causes Basic to recognize this mode as graphics 11, one of the GTIA modes. Locations 560 and 561 hold the address of the display list. In the 167th entry of the display list, the display list interrupt is set by placing a 143 in this location.

The 167th location defines the last line of the display above the text window. Examining the display list reveals that each of the first three entries is 112. This leaves 24 blank lines at the top of the screen. Next comes a load memory scan (LMS) instruction (79), followed by a 2 byte address. This identifies the start of screen memory and the mode of the first line.

Since our display consists of 160 graphics lines, 160 entries (including the LMS) are required to define the display. However, whenever the display crosses a 4K boundary, a new LMS and address must be issued. Since graphics 8 requires 7900 bytes of screen memory, one 4K boundary will be crossed.

Consolidating this information reveals 3 bytes for blank lines and plus 160 bytes for the display plus 2 bytes for the initial screen address plus 2 bytes for the 4K boundary crossing screen address for a total of 167 bytes to reach the final screen line. Thus, the start of the display list plus 166 is the 167th entry. This is where the DLI is called. (For more information on display list composition, see the excellent article by David and Sandy Small, "Atari Graphics Unveiled," July 1981, *Creative Computing*.)

Next a short machine language routine is read in and stored starting at memory location 1536. This is the DLI routine. When called, it causes the bottom of the display to become a text window just as in graphics 8 while the upper portion remains in graphics 11. Locations 512 and 513 hold the two-byte address of the DLI routine (600 Hex = 1536 decimal). Finally the interrupt is enabled by placing 192 into location 54286.

New Commands

The command parser (lines 100-380) accepts the command from the user. If the program mode is active, the command is added to PROGRAM$ (except QUIT, GO, and HELP). The command is then parsed into the command and parameter strings. If the command is found in the list of allowed commands, the appropriate subroutine is called by line 360. If the command is not allowed, an error message is printed, the command is deleted from PROGRAM$ if added earlier, and control returns to line 120 for the next command.

The command subroutines (lines 3000-7040) perform the tasks requested by the user. These routines check PAR$ for the appropriate parameters, check screen boundaries, and move or turn the turtle as required. Only the GO command routine (lines 6500-6610) requires additional explanation.

In this command the user wishes to execute a stored program. The variable XEQ is set to one, then PROGRAM$ is parsed, looking for the * that separates the various commands in the list. (Atari Basic does not support string arrays.) As each command is found, it is assigned to CH$ and control is returned to the command parser at line 200. Once the command is executed, control is returned to line 6600 from line 370 as long as XEQ=1.

Once the entire PROGRAM$ has been parsed, XEQ is set to zero, and the subroutine returns to the command parser in the program mode. Thus an existing program may be executed and extended numerous times. PROGRAM$ is dimensioned as 1025, so approximately 100 commands may be stored. Once the program mode is exited through the QUIT command, PROGRAM$ is set to the null string and the previous program is deleted.

So there you have it, HTURTLE for the Atari. Now you Atari owners can begin to explore the world of Turtlegraphics.

NEW! Let Colonel Byte take your child on a trip through Cybernia

They'll learn all about computers along the way!

Growing up in the computer world will be easier if your child understands computers. And there's no better place to start than with the computer that's in your home—and with the help of this delightful book.

Computer Parade traces the adventures of Katie and her brother after they fall into the family computer. It reads like a story book. Yet it actually teaches the basics of computer operation.

Any youngster age 4-10 will delight in *Computer Parade*. It's easy to read and richly illustrated in full color.

Help your child grow up computer literate by ordering your copies now

MAIL TODAY TO: **CREATIVE COMPUTING PRESS**
Dept. HA3Q 39 East Hanover Avenue, Morris Plains, NJ 07950
Please send me_____ copies of *Computer Parade* for $9.95 each, plus $2.00 shipping & handling per book. Total Amount $_____
☐ Payment Enclosed. (CA, NJ and NY State residents please add applicable sales tax.)
☐ Charge my: ☐ American Express ☐ MasterCard ☐ Visa

Card #_____ Exp._____
Signature_____
NAME_____
(please print)
ADDRESS_____
CITY_____ STATE_____ ZIP_____
*Outside U.S., add $3 for shipping and handling
☐ Check here to receive a FREE catalog of computing books, magazines and guides. Also available in your local bookstore or computer store.

For Faster Service, PHONE TOLL FREE: 800-631-8112
(In NJ only: 201 540 0445)

APPLEWARE, INC.

The Apple Users Group Software Library Bonanza
At truly affordable prices!
For the first time enjoy your Apple to its fullest capacity, using specially **packed disks with over 60 outstanding programs each.**
[not available from any other source]

PROGRAMS $1.00 EACH

Each packed disk includes an extensive variety of interesting, useful and entertaining programs indispensable to all computerists! Each mixed category packed disk includes:
BUSINESS • EDUCATIONAL • DATA BASE • GAMES UTILITIES • SCIENCE • MUSIC • GRAPHICS • FINANCE
Library Disks I, II and III are mixed categories. Dedicated disks are:
• GAMES • UTILITIES • GRAPHICS • INTEGER • SCIENCE & TECHNOLOGY. Each packed disk is available for only $59.95 each.

WHY PAY MORE?

Order direct from this ad and **Save up to $150.** Buy Library Disks I, II and III and get a special bonus disk **FREE** - over 260 programs for $179.95 + $3. shipping. For the best value, receive all 9 disks featuring over 600 of our best programs for **only 65¢ each** - for a package price of only $389. Postage Paid!

NEW. Business • Professional • Executive Package (enabling you to bring your business to its highest level of efficiency) also available, circle Readers Service Card for our complete catalog

For Orders Only Call now
TOLL FREE: 1-800-327-8664
Florida: 1-305-987-8665

MasterCard VISA

Compatible with II, II+, IIe, IIe Emul., and Franklin Ace (For 3.3 DOS)

CIRCLE 111 ON READER SERVICE CARD

SCRG PRESENTS

For Your Apple][, Apple][+, Apple //e, Apple /// & Franklin

switch-a-slot

The **switch-a-slot** connects to any peripheral slot of the computer through an 18" cable. The user can plug up to four cards in the **switch-a-slot**. The desired card is chosen by using a switch on the front, and only the selected card draws power. This product is suitable for most peripheral cards. The **switch-a-slot** is perfect for selecting between different printer cards.

- **Holds 4 peripheral cards**
- **Saves wear and tear on delicate connectors**
- **All connectors are gold plated for reliability**
- **Only selected card draws power**
- **Works with most cards**

$179.50

Extend-A-Slot

The EXTEND-A-SLOT brings a slot outside your APPLE™, allowing an easy change of cards. The 18" flex cable is long enough to allow placement of the card in a convenient location. The high quality connectors are gold plated for reliability. **$34.95**

These products work well with all slow to medium speed cards, such as Modems, Printers, Clock, Music, etc. They are not recommended for high speed data transfer devices such as alternate processor and disk drive controller cards.

These fine products come with a 6 month warranty
Available at your local dealer or direct from:

SOUTHERN CALIFORNIA RESEARCH GROUP
Post Office Box 2231 - C
Goleta, CA 93118
(805) 685-1931
VISA, MASTERCARD accepted

Add $2.50 for shipping, $5.00 outside U.S.A. & Canada. CA add tax.

Apple is a trademark of Apple Computers. Franklin is a trademark of Franklin Computers.

CIRCLE 223 ON READER SERVICE CARD

ATLANTIC COMPUTER ACCESSORIES INC

CALL OR WRITE FOR FREE CATALOG

ADDS
A1 TERMINAL 518.00
A2 TERMINAL 546.00

AMDEK
AMDEK I-13" COLOR MONITOR 310.00
AMDEK II-13" HI RES RGB COLOR MON 469.00
AMDEK III COLOR MONITOR 425.00

ANCHOR AUTO AIARS-232 DIR CON MODEM 95.00

AXIOM PRINTER 199.00

B'CHAYES
HAYES SMART MODEM MII W TER PRO 309.00
HSMART SMART MODEM 215.00
HCRON CHRONOGRAPH 199.00
HMICRO MICRO MODEM II 275.00
H1200 SMART MODEM 1200 519.00

EPSON
MX 80 DOT MATRIX PRINTER CALL
FX 80 HI SPEED PRINTER CALL

IBM
5 1/4 SS DD DISKS (10) 25.00
5 1/4 DS DD DISKS (10) 30.50

MAXELL
MD1 5.25 SS/SD (BOX OF 10) 32.00
MID0 5.25 SS/DD (BOX OF 10) 41.00
MD2 5.25 DD/SD (BOX OF 10) 45.00

MBI
1/2 MAGIC ROM FOR IBM 69.00
VIP CARD FOR APPLE 129.00
MONTE CARLO CARD GT 359.00
MONTE CARLO CARD QUATRO 319.00
APPLE TIME CARD 69.00

#OUSTON INSTRUMENT
DMP-40 A/B SIZE PLOTTER CALL
DMP-41 C/D SIZE PLOTTER CALL

MICROSOFT
SIFTCARD" Z80 CARD CALL
MULTIAPP MULTI PLAN APPLE CALL
MULTIAPP CPM MULTI PLAN APPLE CPM CALL

MICROTEK
64K RAM CD 64K MEMORY CARDS 199.00
128K RAM CD 128K MEMORY CARDS 295.00
80COL CD 80 COLUMN CARDS 169.00
DUMPLING 16K PARA INTRF W/16K BUF 163.00
D DISK 128K W/DISK EMULAT FRMWR 329.00

MICROWARE DIST
GRAFIT APPLE GRAPHING PROGRAM 21.95
PERFORMER PRINTR ENHNC USE W/PAR CD 38.90

NOVATION
APPLE CAT II 289.00
J CAT DIR CON 300 BAUD MODEM 119.95

OKIDATA
MICRO MICROLINE 83A PRINTER CALL
MICROBD MICROLINE 80 PRINTER CALL
M82A MICROLINE 82A PRINTER CALL
92SP HIGH SPEED PARALLEL PRNTR CALL
92 160CPS PRINTER CALL
93 WIDE CARRIAGE 160CPS PRINTER CALL

PANASONIC
CT 160 COLOR MONITOR 299.00
TR 120 MHP HI RES GREEN PHOSPHOR 159.00

QUANTEX 7030 MULTIMODE PRINTER 1634.00

SILVER REED EXP 550 749.00

TATAM
VISION I RGB MON 317.00
VISION III HI RES RGB MON 529.00

TALLY MT 160 CALL

TELEVIDEO
910 TERMINAL 620.00
925 TERMINAL 778.00
950 TERMINAL 1145.00

TG PRODUCTS
JOY STICKS 47.00
PADDLES 32.00

TYMAC PARALLEL INTERFACE & CABLE 99.00

USI INTERNATIONAL
PG 12" GREEN PHOSPHOR MONITOR 159.00
PG 12" AMBER PHOSPHOR MONITOR 175.00

VIDEX
VIDEX I 80 COLUMN CARD CALL
VIDEX 80 ENHANCERII CALL

WASHI M11A411X 5.25" SS/SD DSK (10) 20.99

CALL FOR MONTHLY SPECIALS and CURRENT LOWER PRICES.

Prices subject to change. Fla residents Add 5% Tax

FREE SHIPPING - Payment w/order over $100.00.

Se Habias Espanol

COMPUSERVE ID# 75735,252

1-800-327-8020

1-305-972-5399

6951 N.W. 15th Avenue
Ft. Lauderdale, FL 33309

CIRCLE 112 ON READER SERVICE CARD

HTURTLE, continued...

Listing 1.

```
10 REM ****************************
11 REM *     HTURTLE REVISITED    *
12 REM *          BY              *
13 REM *      JOHN AND MARY       *
14 REM *        HARRISON          *
15 REM ****************************
16 REM
20 REM THIS SETS UP THE STRING VARIABLES
21 REM AND CHANGES FROM RADIAN MEASURE
22 REM TO DEGREE MEASURE BEFORE INITIALIZATION
23 REM
60 DEG
70 DIM CH$(30),COLR$(100),CLLR(8),PAR$(10),NUM1$(5),NUM2$(5),COM$(10)
80 DIM PROGRAM$(1025),CMD$(150),EDPAR$(10),EDNUM1$(5),EDNUM2$(5)
90 GOSUB 10000
99 REM
100 REM MAIN LOOP:PARSE COMMAND
101 REM THE MAIN LOOP ACCEPTS AND PARSES
102 REM EACH ENTRY TO SEPARATE THE
103 REM COMMAND FROM ITS PARAMETERS
104 REM
110 EDIT=0
120 CH$="":IF PROG=1 THEN ? "$";
130 INPUT CH$:IF CH$<>"EDIT" THEN TCH=LEN(CH$):GOTO 180
140 IF EDIT=1 THEN ? "You may not EDIT two commands in a row.":GOTO 120
150 EDIT=1:CASE=EDCASE:IF PROG=0 THEN 360
160 IF LEN(PROGRAM$)-TCH<=1 THEN PROGRAM$="":GOTO 360
170 PROGRAM$=PROGRAM$(1,LEN(PROGRAM$)-TCH-1):GOTO 360
180 EDIT=0:IF PROG=1 AND CH$="QUIT" THEN 200
190 IF PROG=1 AND CH$<>"GO" AND CH$<>"HELP" THEN PROGRAM$(LEN(PROGRAM$)+1)
    =CH$:PROGRAM$(LEN(PROGRAM$)+1)="$"
200 FOR I=1 TO LEN(CH$)
210 IF CH$(I,I)=" " THEN PAR$=CH$(I+1):CH$=CH$(1,I-1):GOTO 230
220 NEXT I
230 FOR I=0 TO NC-1
240 IF CH$>CMD$((I+1)*I,I*I0+LEN(CH$)) THEN 270
250 CASE=I+1:EDCASE=CASE
260 GOTO 310
270 NEXT I
280 ? "I do not understand.  Try again."
290 IF PROG=1 AND LEN(PROGRAM$)<=TCH+1 THEN PROGRAM$="":GOTO 120
300 IF PROG=1 THEN PROGRAM$=PROGRAM$(1,LEN(PROGRAM$)-TCH-1):GOTO 120
310 IF LEN(PAR$)=0 THEN 360
320 FOR I=1 TO LEN(PAR$)
330 IF PAR$(I,I)=" " THEN PAR$=PAR$(I+I):GOTO 350
340 NEXT I
350 EDPAR$=PAR$
360 ON CASE GOSUB 1000,1500,2000,2500,3000,3500,4000,4500,5000,5500,6000,
    6500,7000
370 IF XEQ=1 THEN RETURN
380 GOTO 120
999 REM
1000 REM ** CLEAR **
1001 REM THIS ROUTINE ERASES THE SCREEN
1002 REM AND REPOSITIONS THE TURTLE TO
1003 REM THE CENTER OF THE SCREEN FACING
1004 REM NORTH
1005 REM
1010 IF EDIT=1 THEN RETURN
1020 POKE 54286,0:GRAPHICS 8:POKE 87,1:POKE 623,192
1030 POKE PEEK(560)+256*PEEK(561)+166,143
1040 POKE 512,0:POKE 54286,192
1050 SETCOLOR 4,0,8:COLOR 0
1060 TX=40:TY=80:TA=0
1070 RETURN
1499 REM
1500 REM ** COLOR **
1501 REM THIS ROUTINE CHECKS THE DESIRED
1502 REM COLOR AGAINST THOSE AVAILABLE
1503 REM
1510 IF EDIT=1 THEN SCOL=OLDSCOL:COLOR SCOL:RETURN
1520 OLDSCOL=SCOL
1530 IF LEN(PAR$)>10 THEN 1580
1540 FOR I=0 TO 7
1550 IF PAR$=COLR$((I*10+1,I*10+LEN(PAR$)) THEN 1570
1560 SCOL=2*CLLR(I):COLOR SCOL:RETURN
1570 NEXT I
1580 ? "My colors are: BLACK,ORANGE,PINK";:? "PURPLE,BLUE,TURQUOISE,GREEN,
    YELLOW"
1590 IF PROG=1 AND TCH+1<=LEN(PROGRAM$) THEN PROGRAM$=""
    :RETURN
1600 IF PROG=1 THEN PROGRAM$=PROGRAM$(1,LEN(PROGRAM$)-TCH-1)
1610 RETURN
1999 REM
2000 REM ** TURN **
2001 REM THIS ROUTINE TURNS THE TURTLE
2002 REM CLOCKWISE (POSITIVE VALUES) OR
2003 REM COUNTERCLOCKWISE (NEGATIVE VALUES)
```

```
2004 REM THROUGH THE STATED NUMBER OF DEGREES
2005 REM
2010 IF EDIT=1 THEN TA=OLDTA:RETURN
2020 OLDTA=TA
2030 TA=TA+VAL(PAR$)
2040 IF TA<0 THEN TA=TA+TWOPI:GOTO 2040
2050 IF TA>=TWOPI THEN TA=TA-TWOPI:GOTO 2050
2060 RETURN
2499 REM
2500 REM ** TURNTO **
2501 REM THIS ROUTINE TURNS THE TURTLE
2502 REM TO A SPECIFIED ANGLE
2503 REM
2510 IF EDIT=1 THEN TA=OLDTA:RETURN
2520 OLDTA=TA
2530 TA=VAL(PAR$)
2540 IF TA<0 THEN TA=TA+TWOPI:GOTO 2540
2550 IF TA>=TWOPI THEN TA=TA-TWOPI:GOTO 2550
2560 RETURN
2999 REM
3000 REM ** MOVE **
3001 REM AFTER CALCULATING THE HORIZONTAL
3002 REM AND VERTICAL DISTANCE TO BE MOVED
3003 REM THIS ROUTINE CHECKS TO SEE THAT
3004 REM THE TURTLE REMAINS ON THE SCREEN
3005 REM BEFORE A LINE IS DRAWN
3006 REM
3010 IF EDIT=0 THEN 3090
3020 EDIS=VAL(EDPAR$):ELDX=TX:ELDY=TY
3030 EDX=EDIS*SIN((180-TA):EDY=3*(EDIS*COS(180-TA))
3040 ETX=ELDX+EDX:ETY=ELDY+EDY
3050 COLOR 0
3060 PLOT ELDX,159-ELDY:DRAWTO ETX,159-ETY
3070 COLOR SCOL:TX=OLDX:TY=OLDY
3080 RETURN
3090 DIST=VAL(PAR$):DLDX=TX:OLDY=TY
3100 DX=DIST*SIN(TA):DY=3*(DIST*COS(TA))
3110 TX=OLDX+DX:TY=OLDY+DY
3120 IF TX<80 AND TX>-1 AND TY<160 AND TY>-1 THEN 3160
3130 TX=OLDX:TY=OLDY:? "Off the screen"
3140 IF PROG=I THEN PROGRAM$=PROGRAM$(I,LEN(PROGRAM$)-TCH-I)
3150 RETURN
3160 PLOT OLDX,159-OLDY:DRAWTO TX,159-TY
3170 RETURN
3499 REM
3500 REM ** MOVETO **
3501 REM THIS ROUTINE MOVES THE TURTLE
3502 REM TO A SPECIFIED X,Y COORDINATE
3503 REM
3510 FOR I=1 TO LEN(PAR$):IF PAR$(I,I)<>"," THEN NEXT I
3520 NUM1$=PAR$(1,I-1):NUM2$=PAR$(I+1)
3530 IF EDIT=0 THEN 3590
3540 ETX=VAL(NUM1$):ETY=3*(VAL(NUM2$))
3550 COLOR 0
3560 PLOT ETX,159-ETY:DRAWTO OLDX,159-OLDY
3570 COLOR SCOL:TX=OLDX:TY=OLDY
3580 RETURN
3590 OLDX=TX:OLDY=TY
3600 IF NUM1$="" OR NUM2$="" THEN ? "I need 2 numbers."
     :RETURN
3610 TX=VAL(NUM1$):TY=3*(VAL(NUM2$))
3620 IF TX<80 AND TX>-1 AND TY<160 AND TY>-1 THEN 3660
3630 TX=OLDX:TY=OLDY:? "Off the screen"
3640 IF PROG=I THEN PROGRAM$=PROGRAM$(I,LEN(PROGRAM$)-
     TCH-I)
3650 RETURN
3660 PLOT OLDX,159-OLDY:DRAWTO TX,159-TY
3670 RETURN
3999 REM
4000 REM ** TURTLEX **
4001 REM THIS ROUTINE DISPLAYS THE TURTLE'S
4002 REM HORIZONTAL (X) POSITION
4003 REM
4010 IF EDIT=I THEN RETURN
4020 TX=INT(TX+0.5)
4030 ? "TURTLE X = ";TX
4040 IF PROG=I THEN PROGRAM$=PROGRAM$(I,LEN(PROGRAM$)-8)
4050 RETURN
4499 REM
4500 REM ** TURTLEY **
4501 REM THIS ROUTINE DISPLAYS THE TURTLE'S
4502 REM VERTICAL (Y) POSITION
4503 REM
4510 IF EDIT=I THEN RETURN
4520 TY=INT(TY+0.5)
4530 ? "TURTLE Y = ";TY
4540 IF PROG=I THEN PROGRAM$=PROGRAM$(I,LEN(PROGRAM$)-8)
4550 RETURN

4999 REM
5000 REM ** TURTLEANG **
5001 REM THIS ROUTINE DISPLAYS THE TURTLE'S
5002 REM HEADING
5003 REM
5010 IF EDIT=1 THEN RETURN
5020 ? "TURTLE ANGLE= ";INT(TA+0.5)
5030 IF PROG=1 THEN PROGRAM$=PROGRAM$(I,LEN
     (PROGRAM$)-10)
5040 RETURN
5499 REM
5500 REM ** QUIT **
5501 REM THIS ROUTINE IS USED TO EXIT
5502 REM THE PROGRAM MODE AND THE EXIT
5503 REM THE ENTIRE INTERPRETER
5504 REM
5510 IF EDIT=I THEN RETURN
5520 PROG=FROG-1:IF PROG=0 THEN RETURN
5530 ? "See you later.":END
5999 REM
6000 REM ** PROGRAM **
6001 REM THIS ROUTINE SETS THE FLAG FOR
6002 REM PROGRAM MODE
6003 REM
6010 IF EDIT=I THEN PROG=0:RETURN
6020 PROGRAM$=""
6030 PROG=1
6040 RETURN
6499 REM
6500 REM ** GO **
6501 REM THIS ROUTINE "RUNS" THE LIST OF
6502 REM COMMANDS IN THE PROGRAM STRING
6503 REM
6510 IF EDIT=1 THEN RETURN
6520 IF PROG=0 THEN ? "No program saved.":RETURN
6530 GOSUB [000:DF=0
6540 XEQ=1:MARKGO=I
6550 CH$="":PAR$="":NUM1$="":NUM2$=""
6560 FOR J=I TO LEN(PROGRAM$)
6570 IF PROGRAM$(J,J)<>"$" THEN 6610
6580 CH$=PROGRAM$(MARKGO,J-I)
6590 MARKGO=J+1
```




Can your customers afford to go only half way to protect their computer systems?

Tripp-Lite Isobars offer your customers more features for less money than other brands!

Specifically Tripp-Lite Isobars provide individual filter banks to isolate each load from other loads to filter out RFI and damaging high voltage spikes. Other brands do not have three way spike protection, noise suppression for RFI, *and* isolated filter banks. Now you can supply your customers with the most complete multiple outlet filter on the market. Available with two, four, and eight outlets; six or fifteen foot cords.

Dealerships and Distributorships available!

Call or write for quantity pricing and sample information.

Phone 312-329-1777

TRIPP-LITE *Established 1922*
500 North Orleans St., Chicago, IL 60610

CIRCLE 266 ON READER SERVICE CARD

LOWEST CP/M PRICES

GUARANTEED

We hereby certify that your purchase from Discount Software represents the lowest price sold anywhere. If you find a lower price on what you purchased within 30 days, send the ad and we'll refund the difference.

19 SPECIAL BARGAINS
(Call toll-free number for hundreds more!)

ARTIFICIAL INTELLIGENCE	
dBase II	Call $477
DIGITAL RESEARCH	
Northstar	$149
TRS-80 Model II (P & T)	$159
CBasic-2	$98
PL/I-80	$449
Z-Sid	$90
FOX & GELLER	
QUIII	$65
MICROPRO	
WordStar	$279
Mail Merge	$179
SpellStar	$199
MICROSOFT	
Basic-80	$249
Basic Compiler	$329
Fortran-80	$349
Cobol-80	$549
Macro-80	$159
SORCIM	
SuperCalc I	$179
"WORD PROCESSING"	
The Word Plus	$145
"COMMUNICATIONS"	
Crosstalk	$139
Move-It	$89

FREE WITH PURCHASE
Complete Software Buyer's Guide ($5.00 value)
CC-783

Outside Continental U.S. add $10 plus Air Parcel Post. Add $1.50 postage and handling per each item. California residents add 6½% sales tax. Allow 2 weeks on checks. C.O.D. $3.00 extra. Prices subject to change without notice. All items subject to availability. *My trademark. Blue Label $2.00 additional per item. U.P.M. is a registered trademark of DIGITAL RESEARCH, Inc.

ORDER TOLL-FREE
VIA VISA OR MASTERCARD
1-800-421-4003
or 1 213-837-5141 Calif. 1 800 252-4092
8520 Selma Avenue, Los Angeles, CA 90028

DISCOUNT SOFTWARE

CIRCLE 151 ON READER SERVICE CARD

HTURTLE, continued...

Listing 1, continued.

```
6600 GOSUB 200
6610 NEXT J
6620 XEQ=0:RETURN
6999 REM
7000 REM ** HELP **
7001 REM THIS DISPLAYS A LIST OF THE
7002 REM AVAILABLE COMMANDS
7003 REM
7010 IF EDIT=1 THEN RETURN
7020 ? "My commands are: CLEAR,COLOR,TURN"
7030 ? "TURNTO,MOVE,MOVETO,TURTLEX,TURTLEY"
7040 ? "TURTLEANG,QUIT,GO,PROGRAM"
7050 RETURN
9999 REM
10000 REM ** INITIALIZATION **
10001 REM THIS SECTION OF CODE READS
10002 REM IN THE LIST OF AVAILABLE
10003 REM COMMANDS, POSITIONS THE TURTLE
10004 REM TO THE CENTER OF THE SCREEN
10005 REM HEADING NORTH AND PROMPTS THE
10006 REM USER WITH A MESSAGE
10007 REM
10010 TWOPI=360:PROG=0
10020 READ NC
10030 FOR I=0 TO NC-1:READ COM$
10040 CMD$(I*10+1,I*10+LEN(COM$))=COM$
10050 NEXT I
10060 CMD$(LEN(CMD$)+1)="                "
10070 COLR$=""
10080 FOR I=0 TO 7:READ COM$:COLR$(I*10+1,I*10+LEN(COM$))=COM$
10090 CLLR(1)=I
10100 NEXT I
10110 COLR$(LEN(COLR$)+1)="          "
10111 REM
10112 REM SET UP THE DISPLAY LIST
10113 REM INTERRUPT ROUTINE TO PROVIDE
10114 REM A TEXT WINDOW IN GRAPHICS 11
10115 REM
10120 POKE 54286,0:GRAPHICS 8:POKE 87,11:POKE 623,192
10130 POKE PEEK(560)+256*PEEK(561)+166,143:POKE 54286,64
10140 FOR K=0 TO 18:READ P:POKE 1536+K,P:NEXT K:POKE 513,6
10150 POKE 512,0:POKE 54286,192
10160 SETCOLOR 4,0,8:COLOR 0
10170 TX=40:TY=80:TA=0
10180 ? "YOUR TURTLE IS READY"
10190 RETURN
10999 REM
11000 REM ** COMMANDS **
11001 REM DATA STATEMENTS THAT DETAIL
11002 REM THE NUMBER OF AND THE AVAILABLE
11010 DATA 13
11020 DATA CLEAR,COLOR
11030 DATA TURN,TURNTO,MOVE,MOVETO
11040 DATA TURTLEX,TURTLEY,TURTLEANG
11050 DATA QUIT,PROGRAM,GO,HELP
11059 REM
11060 REM ** COLORS **
11061 REM DATA STATEMENTS FOR THE EIGHT
11062 REM AVAILABLE COLORS
11063 REM
11070 DATA BLACK,ORANGE,PINK,PURPLE,BLUE,TURQUOISE,GREEN,YELLOW
11080 DATA 72,173,111,2,41,63,141,10,212,141,27,208,169,0,141,26,208,104,64
```

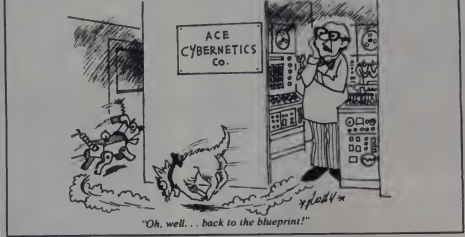

"Oh, well... back to the blueprint!"

WORDS CAN'T DESCRIBE THE EASE OF USING TRANSEND PC FOR ELECTRONIC MAIL.

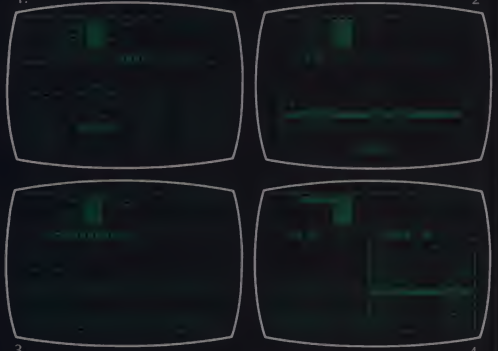

SCREENS CAN.

The screens say so much, you may never need the manual. Transend PC turns your IBM PC into an electronic workstation or an intelligent terminal. Four screens show how easy it is to use:

1. Transend PC uses IN and OUT baskets just like you do. To choose one, hit a key.

2. The basket shows what's inside. To choose a document, hit a key and *voila!*

3. It's full size. You can read, edit, file, address or toss it (Note the WASTE basket on screen 1).

4. To route or address a document, pick a name from the ADDRESS basket. Transend PC does the rest.

To mail it over the phone, move it to the OUT basket and hit another key. Transend PC dials the addresses; delivers (through SOURCE-MAIL℠, OnTyme®, or direct to another PC); checks for incoming mail; and signs off. You don't have to set up anything or learn any parameters. Transend does everything automatically.

Transend PC works with *all* other software packages like 1-2-3™, WordStar®, and VisiCalc®. You can label baskets to handle all your paperwork. And Transend PC lets your IBM PC talk to any other computer.

For a closer look at the screens, ask your dealer for a demo. For a closer look at electronic communications, ask for a free copy of *The Who, What, Why, How and When of Electronic Communications* from Transend.

Transend Corporation
2190 Paragon Drive
San Jose, CA 95131
(408) 946-7400

TRANSEND
THE WORLD JUST KEEPS GETTING SMALLER.

Transend PC is a trademark of Transend Corporation. IBM PC is a trademark of International Business Machines Corporation. SOURCE-MAIL is a service mark of The Source Telecomputing Corporation. OnTyme is a registered trademark of Tymshare, Inc. 1-2-3 is a trademark of Lotus Development Corporation. WordStar is a trademark of MicroPro Int. VisiCalc is a registered trademark of VisiCorp.

CIRCLE 250 ON READER SERVICE CARD

Printing Logo Graphics

William A. Beasley

One of my duties as well as my pleasures is to teach computing to people ranging from elementary schoolers to college professors. I have found Logo an excellent tool, and I continually delight at the inverse relationship of age to learning speed. Like most people using Logo I begin teaching with graphics; therein lies the tale at hand.

Graphics, especially in color, are delightful teaching tools. A problem arises when a student wishes to take the product from the class to show playmates or colleagues. The monitor is not portable, and somehow the listing of a procedure does not carry the same fascination as a picture.

It is possible to acquire a printout of a Logo screen by saving the picture to disk (using enormous quantities of disk space), exiting Logo, loading the picture as a binary file, and dumping the binary file. This is awkward, so I decided that something more user-friendly would be helpful.

The Terrapin Logo documentation provides a simple procedure for dumping Logo screens directly through the Orange Micro Grappler printer card. The procedures shown here constitute an elaboration on that procedure, and serve to assume the burden of remembering specific control codes and sequences. They are functional but not terribly elegant, as my grasp of the language remains a bit shaky (Logo programmers above the age of 12 are hard to find around here, and those of the shorter persuasion are rarely helpful on issues of programming style).

There are three procedures, called in sequence. TO HARDCOPY is the initial procedure accessed when one wishes a screen dump. TEXTSCREEN switches from the graphics page to the text page without destroying the graphics. The 14 lines that follow outline the available options. The PRINT command is used here as it would be in Basic.

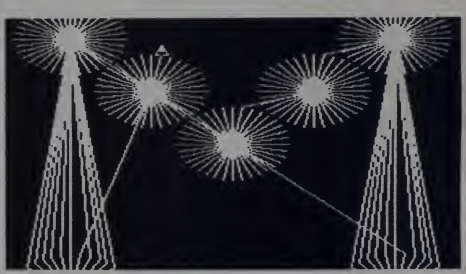

Figure 1. Boom by Evey Fletcher (Grade 4).

The next line assigns to the variable the value that is then entered through the keyboard. REQUEST is the INKEY$ counterpart, and FIRST is used to store the value as a word (the first element of the list REQUEST) rather than a list.

FULLSCREEN returns to the graphics display; no more human input is needed. The last line calls the procedure TO DISCRIMINATE and sends to it the current value of WHICH ("WHICH is the name of the variable; :WHICH is the value. It is like the difference in Basic between PRINT "X" and PRINT X.)

The fact that TO DISCRIMINATE carries in its first line :WHICH indicates that it is expecting a value to be passed in. Actually, "WHICH is a local variable here. Although I kept the same name as used in TO HARDCOPY, it can be called just about anything you please as long as all instances of :WHICH in TO DISCRIMINATE are replaced by :YOURNEWNAME. (I suspect I kept the same name partially because my old Basic habits intrude.)

The second line is a simple error trap. The next twelve lines assign values to the variable "SECOND on the basis of the value passed in from TO HARDCOPY. The values assigned are the control commands for the special Grappler functions; WORD is used here to avoid adding spaces between the commands. TO DISCRIMINATE then passes control to TO PRINTER, sending to the new procedure the needed control codes in the form of "SECOND.

There is another local variable in TO PRINTER. In this case I again retained the old name from force of habit, but in fact all instances of :SECOND in TO PRINTER may be replaced by consistent use of :WHATEVERYOUPLEASE.

The next line assigns CTRL-I to the variable "FIRST. CHAR 9 is the Logo equivalent of CHR$(9). Next the value of

William A. Beasley, Center for Educational Technology, Aderhold Hall/UGA, Athens, GA 30602.

Universal's Bewitching Prices

APPLE

Business

Friday	$236.00
dBase II	560.00
Incredible Jack	143.20
Word Star	395.00
Spell Star	199.95
Mail Merge	199.95
Multiplan	219.95
ScreenWriterII	103.96
Word Handler	159.95
PFS File	99.95
PFS Report	99.95
PFS Graph	99.95
PFS Writer	99.95
DB Master	183.20
VisiCalc	199.00
VisiFile	199.00
VisiDex	199.00
Home Accountant	59.96
VersaForm	299.95
QBase	149.95
Apple Type Face	99.00

Games

Pin Ball Construction Set	31.95
Miner 2049er	31.95
Castle Wolfenstein	22.95
Frogger	27.95
Wizardry	39.95
Legacy of Llylgamyn	31.95
Whizzy Print	19.95
Snooper Trooper 1 or 2	35.95
Facemaker	27.95
Delta Drawer	39.95
Flight Simulator	27.95
Zork 1,2, or 3	31.95
Witness	39.95
Aztec	31.95
Zaxxon	31.95
LodeRunner	27.95
A.E.	27.95
Choplifter	27.95

Educational

Apple Cider Spider	27.95
Sammy Lightfoot	31.95
Hands on Basic	62.95
Compu-Read	21.95
Perception	18.95

ATARI

Disassembler (D)	$39.95
Home Accountant (D)	56.95
Jumpman Jr. (C)	31.95
Witness (D)	39.95
Chess (D)	55.95
Checkers (D)	39.95
Odin (D)	39.95
Frogger (T or D)	27.95
New Jawbreaker (T or D)	23.95
Wall War (D)	23.95
Crossfire (D)	23.95
Mouskattack (D)	27.95
Lunar Leeper (D)	23.95
Mr. Cool (C)	31.95
Ultima II	47.95
Dark Crystals (D)	31.95
Sub Commander (C)	39.95
Jumbo Jet Pilot (C)	39.95
Soccer (C)	39.95
Kickback (C)	39.95
Darts (T)	23.95
Pool (T)	23.95
Bank Street Writer (D)	52.95
Crazy Mazey (D)	21.95
Monster Smash (D)	25.95
Night Raiders (D)	25.95
O'Reilly's Mine (T or D)	27.95
Basic Compiler (D)	74.95
Rosen's Brigade (T or D)	27.95
Moon Shuttle (T or D)	27.95
Repton (D)	29.95
Bandits (D)	27.95
Cycloid (D)	21.95
Snake Byte (D)	21.95
Blade of Blackpoole (D)	29.95
Blue Max (D or T)	27.95

For Children (Educational)

Humpty Dumpty & Jack & Jill (T)	23.95
Hickory Dickory Dock (T)	23.95
Spelling Bee Games (D)	29.95
Spelling Bee Games (T)	21.95

COMMODORE 64

Dome Business System(D)	$44.95
Home Accountant (D)	56.95
Household Finance (D)	29.95
Household Finance (T)	25.95
Loan Analyzer (D)	16.95
Loan Analyzer (T)	12.95
Car Cost (D)	16.95
Car Cost (T)	12.95
Home Inventory (D)	16.95
Home Inventory (T)	12.95
Temple of Apshai (D)	29.95
Upper Reaches of Apshai(D)	14.95
Curse of Ra (D)	14.95
Jumpman (D) (Great!!)	29.95
Coco (D)	37.95
Gridrunner (C)	29.95
HES Writer 64 (C)	37.95
Turtle Graphics II (C)	44.95
Retro Ball (C)	29.95
HES Mon (C)	29.95
Weather War II (T)	14.95
Medicine Man (T)	16.95
Tombs (T)	21.95
Forced Encounter (T)	18.95
Forced Encounter (D)	21.95
Word Pro 3 Plus (D) (GREAT)	71.95
Writer's Assistant (D)	106.25
Filling Assistant (D)	106.25
Spread Sheet Assistant(D)	106.25
Personal Finance Assist.	50.95
Color Craft (T)	22.95
Color Craft (D)	26.95
Meteor Madness(T) (NEW!)	18.95
Meteor Madness(D) (NEW!)	21.95
Fast Eddie (D)	26.25
Turmoil (D)	26.25
Squish'M (D)	26.25
Snake Byte (D)	26.25
Type Attack (D)	29.95
Way Out (D)	26.25
Critical Mass (D)	26.25
Blade of Blackpoole (D)	26.25
Fort Apocalypse (D/T)	26.25
Survivor (D/T)	26.25
Touch Typing Tutor (T)	14.95
Touch Typing Tutor (D)	18.95
Robbers of the Lost Tomb (T/D)	18.95
Wall Street (T/D)	18.95
Money Manager (T/D)	18.95
Data Manager (T/D)	18.95
Total Text 2.6 (T)	34.95
Total Text 2.6 (D)	38.95
Total Label (T)	18.95
Total Label (D)	21.95
Time Manager (T)	29.95
Time Manager (D)	33.95
Research Assistant (T)	29.95
Research Assistant (D)	33.95
Adventure Pack I or II (T)	14.95
Grave Robbers (T)	14.95
Trek (T)	14.95
Annihilator (T)	16.95
Practicalc 64 (T)	39.95
Practicalc 64 (D)	44.95

COMMODORE 64 (con't)

Inventory Management(D)	$65.95
Sales Analysis Management (D)	65.95
A/R Management & Invoicing (D)	65.95
A/P Management & Check Writing (D)	65.95
Frogger (T or D)	27.95
New Jawbreaker (D)	23.95
New Jawbreaker (C)	27.95
Witness (D)	39.95
Benji's Space Rescue (D)	35.95
Sword of Fargoal (T or D)	23.95
Moon Dust (C)	29.95
Trashman (C)	29.95
Mr. Cool (C)	31.95
Repton (D)	31.95

For Children (Educational)

Kinder Comp (D)	25.95
Facemaker (D)	29.95
Hey Diddle Diddle (D)	25.95
Facemaker (C)	27.95
Fraction Fever (C)	27.95
Delta Music (C)	31.95

Hardware

Cardboard/6	89.95
Cardram/16	67.95
Cardprint/a	67.95
Cardboard/3	33.95
Cardette/1	33.95
Cardriter/1	33.95
HES Modem	63.95
T.G. Joy Sticks	23.95

Books

Elementary 64	11.25

ECT.

Disk Banks (Holds 10 diskettes)	5.95ea.

VIC-20

River Rescue (C)	33.95
Mutant Herd (C)	33.95
Fourth Encounter (C)	33.95
Submarine Commander(C)	33.95
Choplifter (C)	29.95
Trashman (C)	29.95
Home/Office (T)	21.95
HES Writer	29.95
VIC Forth (C)	44.95
Exterminator (T)	18.95
Touch Typing Tutor (T)	14.95
Annihilator (T)	14.95
Trek (T)	14.95
Flash N Math	11.95
Flash N Spell	11.95
Serpentine (C)	29.95
Shark Trap	14.95
Martian Raider (T)	14.95
Rat Hotel (C)	31.95

T = Tape, C = Cartridge, D = Disk.

To Order: Send certified checks, money orders, or use your Master Card or Visa and call **1-800-343-8019.** From inside New Hampshire call **603-542-6175.** Personal or company checks require two to three weeks to clear. All prices are subject to change without notice. Please include $2.00 per package (1-100 pcs.)for postage and handling. Canada $5.00 P&H. Other countries include 10% for P&H. For C.O.D. $3.63 shipping and handling. Hours: Monday thru Saturday 8:00 to 10:00 Eastern Time.

UNIVERSAL SOFTWARE
The Best Software for Less
P. O. Box 955
Claremont, N H 03743

VISA

CALL NOW • 1-800-343-8019 • TOLL FREE

CIRCLE 267 ON READER SERVICE CARD

Experience
the power of knowledge
at the touch of a button.

Soothsayer
THE ELECTRONIC I CHING

Soothsayer is based on the amazing I-Ching or "Book of Changes" developed in ancient China as a divination medium.

Only $29.95

Order now for your first glimpse into the future.

For Apple II* 48K Disk. Please add $1.50 postage and handling. Georgia residents add sales tax. Dealer inquiries invited. Send check or money order to

WARLOCK SOFTWARE
COMPUTER TYPES, INC.
1900 Emery St. Suite 318
Atlanta, GA 30318 (404) 352-1015

* Apple II and II+ are registered trademarks of Apple Computer, Inc.

CIRCLE 296 ON READER SERVICE CARD

SOFTWEAR



TEE-SHIRTS FOR THE COMPUTER BUFF.

A group of fine quality 50% cotton, 50% poly tee-shirts for the computer enthusiast. Full cut. Sizes S, M, L, XL.

(A) "Byte My Bits" (B) "Have You Hugged Your Programmer Today?" (C) "Ok Programmer" (Child's tee-shirt sizes 6-8, 10-12, 14-16). (D) "V.I.P." (Very Important Programmer) (E) "Computer Expert" (F) "I'm Bilingual. I Speak English and Basic" (G) "Computer Lesson #1: $8.95

Call Toll-Free Mon.-Fri. 9am-6 pm
1-800-B-E-S-W-E-E-T
exc. Fla. or mail coupon.

sweet gum inc. CC103
15490 NW 7th Ave., Ste. 204, N. Miami, FL 33169
Please send me the following tee-shirt(s): (indicate by letter)

STYLE QUANT. SIZE
___ ___ ___ @ $___
___ ___ ___ @ $___
___ ___ ___ @ $___

Add $1.50 each for shipping & handling
Fla. residents add 5% sales tax. Total $_____
Encl. is Check ☐ MO ☐ Charge my MasterCard ☐
Visa ☐ Credit Card # _____
Exp. Date ____
★ ☐ Just send me your COMPUTERMANIA Catalog for now ★
Signature_____
Name_____
Address_____
City_____
State_____ Zip_____

CIRCLE 260 ON READER SERVICE CARD

Logo Graphics, continued...

CTRL-M (carriage return for the Apple) is assigned to the variable THIRD. OUTDEV 1 accesses slot 1, the location of the printer (compare to PR#1).

Then a string of commands is printed out to slot 1; the first is CTRL-I, the second the control codes for the desired special printout features via the Grappler, and the third RETURN. This is the sequence of commands required to activate the Grappler and indeed it seizes control at this point, ignoring the keyboard until the screen has been dumped. OUTDEV 0 returns us to the screen.

Actual use is easy even for me. The three procedures are stored on my Logo file disk under the name EUREKA! .Logo (it seemed an appropriate end to the debugging). After loading Logo, I type READ "EUREKA!. The Apple kindly does so, noting that HARDCOPY, DISCRIMINATE, and PRINTER are defined. I then proceed with whatever graphics routines I desire. When I have a screen I wish to dump, I type HARDCOPY and am presented with my options, from which point the computer takes over.

Figure 1 is a sample screen dump (using option 6) of a program written by one of my shorter colleagues to provide some idea of the results. □

Listing 1.

```
PROCEDURE LISTING
*****************

TO HARDCOPY
 TEXTSCREEN
 ( PRINT [HARDCOPY OPTION:CHOICES AS FOLLOWS] )
 ( PRINT [1 NORMAL SCREEN DUMP] )
 ( PRINT [2 EMPHASIZED (TAKES DOUBLE TIME)] )
 ( PRINT [3 INVERSE (BLACK FOR WHITE)] )
 ( PRINT [4 ROTATED 90 DEGREES] )
 ( PRINT [5 DOUBLE SIZE (WILL BE ROTATED)] )
 ( PRINT [6 EMPHASIZED INVERSE] )
 ( PRINT [7 EMPHASIZED ROTATED] )
 ( PRINT [8 EMPHASIZED DOUBLESIZE] )
 ( PRINT [9 INVERSE ROTATED] )
 ( PRINT [10 INVERSE DOUBLESIZE] )
 ( PRINT [11 INVERSE EMPHASIZED ROTATED] )
 ( PRINT [12 INVERSE EMPHASIZED DOUBLESIZE] )
 ( PRINT ) ( PRINT [PLEASE ENTER THE NUMBER YOU WANT] )
 MAKE "WHICH FIRST REQUEST
 FULLSCREEN
 DISCRIMINATE :WHICH
END

TO DISCRIMINATE :WHICH
 IF :WHICH > 12 THEN HARDCOPY
 IF :WHICH = 1 MAKE "SECOND "G ELSE
 IF :WHICH = 2 MAKE "SECOND ( WORD "G "E ) ELSE
 IF :WHICH = 3 MAKE "SECOND ( WORD "G "I ) ELSE
 IF :WHICH = 4 MAKE "SECOND ( WORD "G "R ) ELSE
 IF :WHICH = 5 MAKE "SECOND ( WORD "G "D "R ) ELSE
 IF :WHICH = 6 MAKE "SECOND ( WORD "G "E "I ) ELSE
 IF :WHICH = 7 MAKE "SECOND ( WORD "G "E "R ) ELSE
 IF :WHICH = 8 MAKE "SECOND ( WORD "G "E "R "D ) ELSE
 IF :WHICH = 9 MAKE "SECOND ( WORD "G "I "R ) ELSE
 IF :WHICH = 10 MAKE "SECOND ( WORD "G "I "D ) ELSE
 IF :WHICH = 11 MAKE "SECOND ( WORD "G "E "I "R ) ELSE
 IF :WHICH = 12 MAKE "SECOND ( WORD "G "E "I "R "D )
 PRINTER :SECOND
END

TO PRINTER :SECOND
 MAKE "FIRST CHAR 9
 MAKE "THIRD CHAR 13
 OUTDEV 1
 PRINT1 ( WORD :FIRST :SECOND :THIRD )
 OUTDEV 0
END
```

Version 4

The Ultimate APPLE® Utility Program
COPY II PLUS

The last DOS utility disk you will need. Fully menu driven, the Copy II Plus utilities include a catalog display with binary file addresses and lengths, a disk usage map, and the ability to verify and compare files for differences. It can copy, lock, unlock and delete files and DOS can be copied, or removed from a disk to free up space. You can change the greeting program on a DOS disk, or initialize a disk from scratch. The Copy II Plus sector editor will allow you to view and modify data in either hex or ASCII format.

COPY II PLUS includes fast and versatile copy programs for making backups of your valuable software. All types of disks can be copied, such as CP/M, PASCAL, DOS and most other formats. Backup speed is as fast as 40 seconds, including formatting and complete sector by sector verification. A disk speed check assures your drives are running in top condition and a nibble editor will allow you to repair damaged diskettes, analyze recording techniques, etc. Call for more details!

"Copy II Plus may well be one of the best software buys available today"
inCider, June '83

CENTRAL POINT Software, Inc.

P.O. Box 19730-203
Portland, OR 97219
(503) 244-5782

$39.95 (Plus $2 s/h)

Attention current Copy II Plus owners: Return your original disk with $19.95 for an update to Version 4.

Attention IBM PC owners: Call us about backing up your valuable software with Copy II PC!

CIRCLE 127 ON READER SERVICE CARD

Dirty Power In — Ultra Quiet

Computer Protection
KLEEN LINE® CONDITIONER

Prevents:
- Computer Damage
- Brownout Interruptions
- Lightning Spike Damage
- Disruptive Line Noise
- Program Errors

Regulator • Filter • Suppressor

KLR-250A	250 Watt Load	$291.95
KLR-250A-ISO	250 Watt Load; Patented Filter Isolated Sockets	$346.95
KLR-500A	500 Watt Load	$390.95
KLR-500A-ISO	500 Watt Load; Patented Filter Isolated Sockets	$445.95

Shipping: $12.75 Land; $45.50 Air

Ask Your Local Dealer

ESP Electronic Specialists, Inc.
171 South Main Street, Box 389, Natick, Massachusetts 01760

Toll Free Order Desk 1-800-225-4876
MasterCard, VISA, American Express

CIRCLE 158 ON READER SERVICE CARD

DOWNSWAY
MEMORIES FOR VIC-20 and T/S 1000

Styled to match the computers rugged, reliable and tight-fitting fully assembled and tested

Proven Products! Tens of thousands of Downsway memories already sold world wide... your guarantee of quality and performance

16K RAM cartridge for VIC-20
Switchable for 3, 8 or 16K giving up to 20K of RAM
Compatible with all expansion accessories
$67.50

16K and 64K Memories for T/S 1000
Ultra-slim, light and compact, only 2 1/4 x 2 1/2 x 7/8 inches, with gold-plated edge connectors. 64K module needs no extra power supply. 8 16K ares can be switched out to use other accessories

16K $39.95 64K $124.95

Plus - New software for T/S 1000, T/S 2000, VIC 20 and Commodore 64!

Fill out coupon below or for faster service,

CALL TOLL FREE: 800-556-6782

In CA call 619 - 342-1223 (7 a.m. - 4 p.m.)

DOWNSWAY CALIFORNIA INCORPORATED
81-824 Trader Place D8, Indio, CA 92201

Name(Print) _____
Address _____
City, State, Zip _____
Please send me _____
Send software information on _____ (Specify Computer)

☐ Check ☐ Money Order ☐ VISA ☐ Mastercard

Card No. _____ EXP. DATE

Signature _____

In CA add 6% Sales Tax. Include $2.00 for shipping ($3.00 UPS Blue Label. $6.00 Canada)

CIRCLE 152 ON READER SERVICE CARD

Mercury Mine

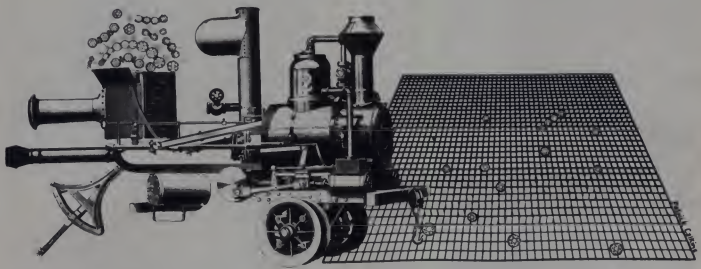

Sol Guber

In the August, 1982 issue of *Creative Computing*, Mac Oglesby published a game called 'Droids for the Pet. I have taken the idea and modified the game for use on the Atari system. It is an educational game for fifth and sixth graders. My modification, Mercury Mine, includes an option to play using a joystick and an option to play against the computer.

Let me explain the game briefly. The screen display is a field of diamonds on which are four robots represented by the numbers 1, 2, 3, and 4. Any robot can pick up diamonds for any player.

The players (up to four) take turns moving the robot of their choice. You get one point for each diamond picked up, and the high score wins. The robots move in the eight directions shown on the right side of the screen. Figure 1 shows a typical start of the game. The robots begin at random locations in the field of diamonds so every game is different.

If you want the computer to play in a multiplayer game, type COMPUTER when the game asks for the name of a player.

Sol Guber, 717 Elkington, Olivette, MO 63132.

To play the game, each person must choose which robot he wishes to mine diamonds for him. After the choice is made, he must choose which direction the robot is to go. The robot will continue in that direction until he can pick no more diamonds, that is until he encounters a blank in the field, a boundary, or another robot.

The object is to pick up the largest number of diamonds possible without giving the next person a better move than you have had. This is what makes the game fun. With four people playing, it is very hard to set yourself up for a good move because someone else will probably take advantage of the situation before it is your turn again. It is, however, possible to have teams.

The computer, when it is playing, will always pick the next best move. It will pick up as many diamonds as possible, but it does not check more than one move ahead, so it may make a foolish move that will set the next person up for an excellent move.

When the joystick option is selected, the joystick must be plugged into port 1. There is no provision for use of more than one joystick. When the joystick option is used, a black square appears on the robot numbers on the right side of the screen. The player moves the square to the appropriate robot number by moving the joystick. Pressing the trigger chooses the robots to be used in that turn.

After a short pause, the choice is written on the bottom of the screen. A pink square then appears on the directions on the right side of the screen. As the joystick is moved, the square rotates over the directions possible for motion. When the pink square is on the direction in which you wish the robot to move, the trigger is pressed.

The direction is then written at the bottom of the screen, and the robot moves in that direction, mining the diamonds until he can go no further, at which point the score is updated.

Commands can also be entered from the keyboard. When the name of the player appears, he enters the number of the robot he wishes to use and the initials of the direction in which he wants him to travel.

Figure 1.



Sample Game

Looking at Figure 1, let us assume that there is a game in progress between Rebecca and the computer, with the computer going first. He has chosen robot 4 to go west. After his move the board will appear as in Figure 2. Rebecca can then move any of the four robots, even 4. She moves robot 1 east,

Figure 2.



picking up nine diamonds. The score is computer 10, Rebecca 9. The screen appears as in Figure 3.

On the next move, the computer moves robot 3 east (Figure 4), and Rebecca has the choice of moving robot 4 south to pick up seven diamonds or robot 2 east to pick up six. If she moves robot 4, the computer will have a very

Figure 3.



good move with robot 4 east. If she moves robot 2 east, then on the next move, the computer will move robot 4 south, and give Rebecca a good move. She moves robot 2 east. The score is now computer 18, Rebecca 15 (Figure 5).

On the next move, the computer robot 4 south (Figure 6), and Rebecca moves robot 4 east. The score is now computer 25, Rebecca 26 (Figure 7). A good move for the computer is robot 1 north, which gives a very good move for Rebecca with

Figure 4.



robot 1 west. Thus with clever play against the computer, Rebecca has pulled ahead and may win the game.

The Program

I have used player/missile graphics to make the little square move and devised a simple "artificial intelligence" routine to let the computer determine the best

Figure 5.



move for itself. The routine is in lines 9000-9200. It scans the eight possible directions for each of the four robots and determines the largest number of diamonds to be picked. This is a simple routine that will find only the current best path. Since the search for the best path is only one level deep, it is possible for a child to beat the computer if he can do a two-level search.

The explanation of the player/missile graphics is more complicated. The pro-

Figure 6.



gram is written in graphics mode 0. One color is allowed, and the letters can be highlighted against the background. To use other colors, a player/missile system must be set up. (This corresponds to sprites on some other systems.) The players can be seen against the background, and can have an independent "life" in relation to the screen.

Figure 7.



The players can be moved rapidly in a horizontal direction by changing only one memory location by means of a POKE statement. To move a player vertically is slower, but there is a method that allows the system to do the work for you. This is set up at the beginning of the program in lines 1-50.

Lines 1-50 set up a player/missile area

Figure 8.



Put your Micro on IBM's level

Now you can communicate with the IBM world with Innovative Data Technology's 1/2" magnetic tape peripherals.

Popular configurations and optimum performance for most small systems that feature industry-standard interfaces, rapid data transfer rates, full operating and command subsets and a wide selection of models and configurations, IDT's magnetic tape subsystems provide economical and reliable data/program interchange, 40M bytes of storage and disc back-up. All IDT subsystems come complete and include tape transport, formatter, intelligent controller, computer resident coupler, cables, documentation and software. But most importantly, they help put your system in touch with the IBM universe.

O.E.M., dealer/distributor discounts available.

INNOVATIVE DATA TECHNOLOGY

4060 Morena Blvd · San Diego, CA 92117
(619) 270-3990 · TWX: (910) 335-1610

Eastern Regional Office:
P.O. Box 1093 · McLean, VA 22101-1093
(703) 821-1101 · TWX: (710) 833-9888

IBM is a trademark of International Business Machines Corp.
Apple is a trademark of Apple Computer Inc.
TRS-80 is a trademark of the Tandy Corporation

CIRCLE 196 ON READER SERVICE CARD

PROTECT YOUR COMPUTERS, DRIVES, PRINTERS, DISKS, BUSINESS!

Born from necessity —

COM-PROTECT III

PROTECTS FROM:

- Power Outages!
- Power Surges!
- Spikes!
- Brown-Outs!
- R.F. Line Interference!
- And More!
- 6 Outlets
- 15 Amp Rating
- 90 Day Replacement Warranty

$79.95 Shipping $3.00

COM-PROTECT III
Computer Protection Device
Don't risk chip domage or disk loss!

COM-PROTECT INC.
Rt. 4-Box 427X
Slidell, Louisiana
70458
504-641-1316

VISA
MASTERCARD
ACCEPTED

CIRCLE 235 ON READER SERVICE CARD

Mercury Mine, continued...

and enable the graphics in the normal manner. The area in memory used for the player/missile area is doing double duty; it serves as the player/missile area and also as the area in memory for storage of a string variable. To fool the system into using this area for two things at once, several things must be done.

Memory locations 134 and 135 are the pointer to memory where string variables are stored. Locations 140 and 141 are the pointer to the actual data storage location. The first dimensioned variable in the program must be a string variable. The system allocates memory for it and puts it into the string variable table.

The memory needed for the player/missile graphics is then calculated, and its location determined. This memory location is transformed into a hi and low address part and is stored in the variable table. Thus, when A$ is used in the program, the actual data are stored in the missile graphics area, and the changes are transformed into pictures on the screen. Since there are four players available, each with its own color or shape, much more information can be put on the screen.

Once the players are set in memory, it is a simple job to move them onto the visible part of the screen. It is also easy to move them up or down by use of the string variable as in line 6700, which moves the square down the screen (up in memory).

To fit the game into 16K, delete lines 3500-3700 and line 3000. □

"That's remarkable, Doc! How'd you know I'm a videogame enthusiast?..."

Listing.

```
1 GRAPHICS 0
5 DIM A$(512),B$(20)
7 X=X+1:READ A:IF A<>-1 THEN B$(X,X)=CHR$(A):GOTO 7
9 DATA 0,250,250,250,250,250,250,250,250,250,250,0,-1
12 POKE 559,42:POKE 704,0:POKE 705,84
15 I=PEEK(106)-16:POKE 54279,I
18 POKE 53277,3
20 VTAB=PEEK(134)+256*PEEK(135)
22 ATAB=PEEK(140)+256*PEEK(141)
24 OFFS=I*256-1024-ATAB
26 HI=INT(OFFS/256):LO=OFFS-HI*256
28 POKE VTAB+2,LO:POKE VTAB+3,HI
30 Y=40:Z=100:V=1:H=1
33 A$(Y,Y+1)=B$:POKE 53248,Z
38 IF Y>213 OR Y<33 THEN V=-V
40 HOR=53248+PRIOR*4:23
42 POKE HOR,220:A$(213,224)=B$:POKE HOR+1,220
70 DIM B1$(40),C$(5),C(4,2),CR$(11),D$(10),SC(4),E$(40),A1$(40),FAC$(20)
72 SIZEPOM=53256
73 CHAR=1000:MINE=2000:START=3000:INSTR=4000:SCORE=2520:CLINK=5000:A1=9000
74 CR$="1234ENS"+FAC$="N NEE SES SWW NW":DIM FC$(25),FIN$(4),POT(8):FIN$="1234"
76 FC$="NW N SW\N  S NE E SE"
78 B1$(1)=" "+B1$(40)=" "+B1$(2)=B1$
80 FOR I=1 TO 4:SC(I)=0:NEXT I
82 GOSUB 400
85 GOSUB START
88 GOSUB MINE
92 SC=PEEK(88)*256+PEEK(89)
95 POKE 703,4
100 FOR I=1 TO P5:IF B1$((I-1)*10+1,(I-1)*10+8)="COMPUTER" THEN GOTO A1
110 ? "WHAT IS THE MOVE FOR "B1$((I-1)*10+1,(I-1)*10+9)
115 IF FG!=1 THEN GOTO 4000
120 ? "WHAT IS THE ROBOT NUMBER";:INPUT D$
130 FLG=0:FOR K=1 TO 4:IF D$(1,1)=CR$(K,K) THEN R=K:FLG=1
140 NEXT K
150 IF FLG=0 THEN ? "THE ROBOT NAME MUST BE FIRST":GOTO 110
160 ? "WHAT IS THE ROBOT DIRECTION";:INPUT C$:IC$=LEN(C$)+1)="   "
170 XDIR=0:YDIR=XDIR
190 IF C$(1,1)="S" OR C$(2,2)="S" THEN YDIR=+2
200 IF C$(1,1)="N" OR C$(2,2)="N" THEN YDIR=-2
210 IF C$(1,1)="E" OR C$(2,2)="E" THEN XDIR=+2
220 IF C$(1,1)="W" OR C$(2,2)="W" THEN XDIR=-2
230 IF XDIR=0 AND YDIR=0 THEN 160
240 NUG=0:Y=C(R,1):X=C(R,2)
245 X=X+XDIR:Y=Y+YDIR
250 Z=PEEK(SC+(Y)*40+X+1):IF Z<>96 THEN 300
260 NUG=NUG+1:GOSUB CLINK:POKE SC+(Y-YDIR)*40+(X+1-XDIR),0
265 POKE SC+Y*40+X+1,R+16
270 C(R,1)=Y:C(R,2)=X:GOTO 245
300 SC(I)=SC(I)+NUG
310 GOSUB 2700
320 IF SC(1)+SC(2)+SC(3)+SC(4)>60 THEN GOSUB 4000
330 NEXT I
340 GOTO 100
400 RESTORE 420
410 FOR I=1 TO 8:READ ER:POT(I)=ER:NEXT I:RETURN
420 DATA -82,-80,-78,-2,2,78,80,82
900 TOP=SC(1):WIN=1
910 FOR I=2 TO 4:IF TOP<SC(I) THEN TOP=SC(I):WIN=I
920 NEXT I
930 ? "THE WINNER IS "B1$((WIN-1)*10+1,(WIN)*10)
980 FOR I=1 TO 1000:NEXT I
985 ? "DOO YOU WANT TO PLAY AGAIN";:INPUT B1$:IF B1$(1,1)<>"Y" THEN END
990 GOTO 85
2000 REM
2001 ? "}":POKE 752,1
2010 REM CANNOT BE PRINTED USING MY PRINTER
2020 ? A$
2030 REM CANNOT BE PRINTED USING MY PRINTER
2035 REM CANNOT BE PRINTED USING MY PRINTER
2040 FOR I=1 TO 9:? A$;? E$:NEXT I
2050 REM CANNOT BE PRINTED USING MY PRINTER
2060 ? A$
2070 POSITION 31,2:? "NW N NE"
2080 POSITION 31,3:? "  \"
2090 POSITION 31,4:? "W * E"
2100 POSITION 31,5:? "  / -"
2110 POSITION 31,6:? "SW S SE"
2115 POSITION 31,9:? "1 2 3 4"
2118 POSITION 33,11:? "SCORE"
2120 FOR I=1 TO P5
2130 POSITION 30,10+2*I:? B1$((I-1)*10+1,(I-1)*10+9)
2140 POSITION 30,11+2*I:? INT(SC(I)):NEXT I
2190 FOR I=1 TO 4
2200 POSITION C(I,2)+1,C(I,1):? CR$(I,I)
2210 NEXT I
2250 RETURN
2700 FOR NI=1 TO P5
2710 SPOT=SC+(11+2*NI)*40+30
2715 SN!=INT(SC(NI)/10)
2718 IF SN!=0 THEN POKE SPOT,0:GOTO 2730
2720 POKE SPOT,SN!+16
```


TRS-80 COLOR COMPUTER

STEAL THE BEST PROGRAMS

The best out of our library of over 200 published programs, packaged and priced so low that it seems like robbery:

Games #1 - Action-packed, logical, and colorful ones! Flyby, Blackjack, Motorcycle, Germ, Blockade, Life, Diggem, Robot Run, Stellar Empire, and Zero G for your fun and pleasure!

Adventures #1 - Trips to far-off and dangerous places. On the agenda are Jerusalem Adventure, Ultimate Adventure, Williamsburg Adventure, House Adventure, Andrea Doria Adventure, Blackard's Castle, and Realm of Naugal

Practicals #1 - Programs for text editing, mailists, budgeting, filing, etc including Keeptext, Keep Address, Keeplist, Keepcheck, Keep Budget, Files, and Tape Inventory.

Graphs & Charts #1 - For data manipulation and display! Do it with Pie Chart, Bar Chart, XY Graph, Curve Fit, and Two Dates.

Choose any one of the four packages for just $12.00 ($17.00 on disk)!

SILVERWARE
...a lot of software for a little $ilver

See your dealer or
Write or call us direct at PO Box 21101, Santa Barbara CA 93121 (805) 966-1449

***DOUBLES DISKETTE STORAGE SPACE!!**

REDUCE YOUR DISKETTE COSTS BY 50%

"The back of your 5¼" single sided diskette has recording medium. All you need is an ACCURATELY placed *"write enable notch"* to use it, on many systems.



"*NIBBLE NOTCH*" is a precision engineered tool designed for this purpose.

IT'S A MONEY SAVER! IMMEDIATE SHIPMENT!

ONLY $14.95

Add $1.50 Postage Handling ($4 50 Foreign)

— Florida Residents Add 5% Sales Tax —

ORDER TODAY!

SEND CHECK OR MONEY ORDER TO

NIBBLE NOTCH™

Division of Cortran International

4211 N.W. 75th Terrace, Dept. 7 10

Lauderhill, Florida 33319

PAT PEND

CIRCLE 163 ON READER SERVICE CARD

FREE

Educational Software Catalog for Your Family

Just Released! Sunburst's new catalog, featuring the best home educational software . . . for all ages . . . selected from the nation's top publishers. Reading, math, programming, problem solving and more . . . to motivate your children and make learning come alive.

Call Toll-Free 800-431-1934

☐ RUSH MY FREE CATALOG

Name _____

Address _____

City _____

State _____ Zip _____

Type of computer _____

SUNBURST

Dept YK 707

39 Washington Ave.

Pleasantville, NY 10570

CIRCLE 258 ON READER SERVICE CARD

Mercury Mine, continued...

```
2730 POKE SPOT+1,INT(SC(N1)-SN1%I0)+16
2740 NEXT N1:RETURN
2810 IF SN1=0 THEN 2730
3000 ? :?OO YOU WANT INSTRUCTIONS":INPUT C$
3010 IF C$<1,1)="Y" THEN GOSUB 3500
3020 ? :?":? "HOW MANY PLAYERS WILL THERE BE          UP TO 4";:INPUT P5
3025 IF P5>1 THEN 3060
3028 P5=2
3030 ? :? "DO YOU WANT TO GO GO FIRST AGAINST    THE COMPUTER";:INPUT C$
3040 IF C$(1,1)="Y" THEN ? :? "WHAT IS YOUR NAME";:INPUT D$:B1$(1,9)=D$:B1$(11,I
9)="COMPUTER":GOTO 3090
3050 IF C$(1,1)="N" THEN B1$(1,9)="COMPUTER":? :? "WHAT IS YOUR NAME";:INPUT D$:
B1$(11,19)=D$:GOTO 3100
3060 FOR I=1 TO P5:? :? "WHAT IS THE NAME OF PLAYER ";I;" :";:INPUT D$
3070 B1$((I-1)*I0+1,(I-1)*I0+9)=D$:NEXT I
3090 FG!=0:? :? "DO YOU WANT TO USE THE JOYSTICK":INPUT D$:IF D$(1,1)="Y" THEN F
01=1
3100 FOR I=1 TO 4
3110 X=INT(RND(0)*9+1):Y=INT(RND(0)*13+1):X=X*2:Y=Y*2
3120 IF I=1 THEN 3140
3130 FOR J=1 TO I-1:IF X=C(J,1) AND Y=C(J,2) THEN 3100
3140 NEXT J:C(J,1)=X:C(J,2)=Y
3160 C(I,1)=X:C(I,2)=Y
3180 NEXT I
3220 RETURN
3500 ? "THERE ARE FOUR ROBOTS WORKING IN A    MINE IN THE PLANET MERCURY.  THEY
ARE CALLED 1, 2, 3, AND 4."
3510 ? "AS THEY MOVE, THEY PICK UP DIAMONDS.  YOU CAN TELL ONE ROBOT TO MOVE AND
"
3520 ? "PICK UP THE DIAMONDS IN HIS PATH UNTILTHERE ARE NO MORE DIAMONDS IN HIS
WAY."
3530 ? "YOU MUST TELL THE ROBOT WHICH DIREC-  TION TO MOVE.  THE PERSON WITH THE
    MOST DIAMONDS WINS."
3540 ? :? "DO YOU WISH TO SEE THE BOARD":INPUT D$
3560 IF D$(1,1)="Y" THEN GOSUB 3100:GOSUB 2000:POSITION 1,23:? "PRESS RETURN TO
CONTINUE":INPUT D$
3580 ? "TO MOVE A ROBOT, TYPE ITS NUMBER AND  THEN TYPE THE DIRECTION THE ROBOT
IS  TO GO TO."
3590 ? "USING THE JOYSTICK, MOVE THE JOYSTICK UNTIL THE SQUARE IS ON THE ROBOT O
R   DIRECTION WANTED.  THEN PRESS"
3595 ? "THE TRIGGER.  THE CHOICE WILL STAY ON THE SCREEN"
3600 ? :? "PRESS RETURN TO CONTINUE":INPUT D$
3700 RETURN
4000 FOR REL=1 TO 4
4005 IF VAL(FIN$(REL,REL))=0 THEN 4500
4010 X=C(REL,2):Y=C(REL,1)
4320 OT=SC+Y*40+X:I=MOV%0
4340 FOR KK=1 TO 8:IF PEEK(OT+POT(KK))=96 THEN MOV=I:GOTO 4355
4350 NEXT KK
4352 IF MOV%0 THEN FIN$(REL,REL)="0"
4355 IF VAL(FIN$)=0 THEN GOTO 900
4500 NEXT REL:RETURN
5000 FOR L%=1 TO 6:FOR KM=65 TO 35 STEP -3:SOUND 0,KM,10,10:NEXT KM:NEXT LM:SOUN
D 0,0,0,0:RETURN
6000 A$(I)="":A$(512)=A$:A$(2)=A$
6002 ? "THE ROBOT NUMBER IS ";
6005 POS=8:Y=10:POKE HOR,17:A$(Y,Y+11)=B$:HR=17I
6010 IF STICK(0)<>15 THEN HR=HR+8:POKE HOR,HR:IF HR>195 THEN HR=171:POKE HOR,HR
6012 FOR J=1 TO 50:NEXT J
6020 IF STRIG(0)=1 THEN 6010
6030 R=INT((HR-171)/8)+1:? R
6035 ? "THE DIRECTION IS ";
6038 FOR M=1 TO 100:NEXT M
6050 Y=304:POKE HOR+1,171:HR=171:A$(Y,Y+11)=B$
6060 IF STICK(0)<>15 THEN POS=POS+1:IF POS<9 THEN GOSUB 6500
6062 IF POS>8 THEN POS=1:GOSUB 6500
6068 FOR M=1 TO 25:NEXT M
6070 IF STRIG(0)=1 THEN 6060
6080 C$(1,2)=FAC$(POS%2-1,POS%2):? C$(1,2):GOTO 170
6500 POKE SIZEPO+1,8:IF INT(POS/2)=POS/2 THEN POKE SIZEPO+I,I
6520 ON INT((POS-1)/2) GOTO 6600,6700,6800,6900
6600 HR=HR+12:POKE HOR+1,HR:FOR M=1 TO 25:NEXT M:RETURN
6700 FOR M=Y TO Y-16:A$(M,M+11)=B$:NEXT M:Y=Y+16:RETURN
6800 HR=HR-12:POKE HOR+1,HR:FOR M=1 TO 25:NEXT M:RETURN
6900 FOR M=Y TO Y-16 STEP -1:A$(M,M+11)=B$:NEXT M:Y=Y-16:RETURN
9000 MAX=0
9005 ? :"THE MOVE FOR COMPUTER "
9010 FOR II=1 TO 4:POS=0
9020 FOR XDIF=-2 TO 2 STEP 2
9040 FOR YDIF=-2 TO 2 STEP 2:CNT=0:POS=POS+1
9043 X=C(II,2):Y=C(II,1)
9050 X=X+XDIF:Y=Y+YDIF*Y
9060 DS=SC+Y%40+X+I
9065 IF PEEK(DS)<>96 THEN 9100
9070 CNT=CNT+1:GOTO 9050
9100 IF MAX<CNT THEN MAX=CNT:IB=II:XB=XDIF:YB=YDIF:PB=POS
9110 NEXT YDIF:NEXT XDIF:NEXT II
9120 XDIF=XB:YDIF=YB:R=IB
9122 ? "THE ROBOT NUMBER IS ";R
9124 ? "THE ROBOT DIRECTION IS ";FC$(PS%2-1,PS%2)
9130 GOTO 240
```

COMPUTERS & ELECTRONICS SWEEPSTAKES

OFFICIAL ENTRY FORM

SAVE UP TO 33% ON *COMPUTERS & ELECTRONICS!*

☐ **YES!** Enter my name in the Computers & Electronics Sweepstakes, and start my subscription to *Computers & Electronics* for the term checked:

- ☐ One year only $12.97—19% off!
- ☐ Two years only $22.97—28% off!
- ☐ Three years only $31.97—33% off!

Savings based on full one-year subscription price of $15.97

CHECK ONE. ☐ Payment enclosed. ☐ Bill me later.

☐ **NO** I do not wish to subscribe now, but tell me if I've won the Computers & Electronics Sweepstakes.

Mr./Mrs./Ms. _____
(please print full name) 8H526

Address _____ Apt. _____

City _____ State _____ Zip _____

Add $5 a year in Canada, all other foreign add $8 per year. Please allow 30 to 60 days for delivery of first issue.

NO PURCHASE NECESSARY—ENTER TODAY!

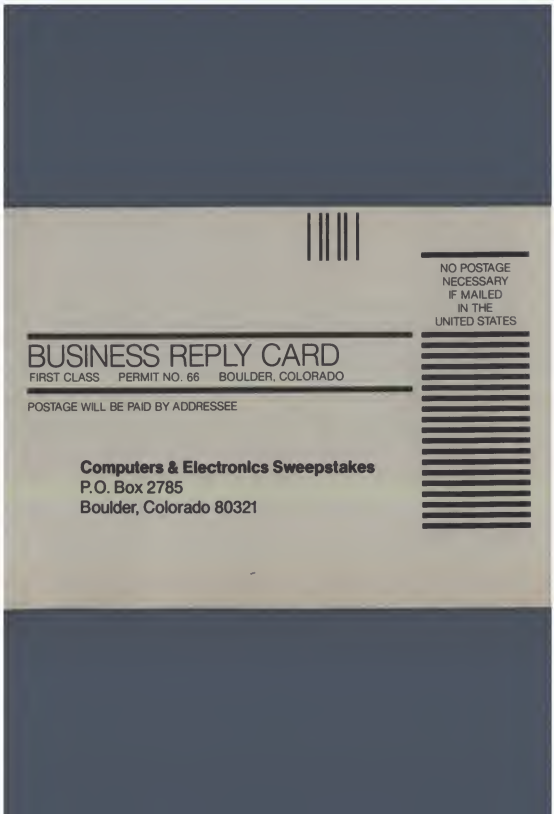

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 66 BOULDER, COLORADO

POSTAGE WILL BE PAID BY ADDRESSEE

Computers & Electronics Sweepstakes
P.O. Box 2785
Boulder, Colorado 80321

COMPUTERS & ELECTRONICS

WIN AN ATARI® SWEEPSTAKES

Save up to 33% on *Computers & Electronics*, too!

The Computers & Electronics Sweepstakes is open to all our readers. No purchase is necessary—and you'll receive a fantastic Atari home computer system worth over $1600 if you're the lucky winner!

How the Sweepstakes works

Just mail the attached card or the coupon below after filling in your name and address. Be sure to indicate whether you're also subscribing to *Computers & Electronics* at the special rates shown—you can save as much as 33%.

Then, if you win, you'll get a superb Atari personal computer system: the Atari 800 with 16K RAM and 10K ROM... an 810 Disk Drive... a 16K RAM Memory Module for extra memory... a pair of Joystick Controllers for game interaction. Use the Atari to handle small business and professional applications as well as sophisticated home processing functions—and, of course, for entertainment. Analyze your investments, learn languages, do business accounting, play video games. Programmable in Basic or Assembly, the 800 can use all Atari peripherals and can control up to four disk drives and a 60 lpm printer. In all, the 800 and its accessories form a package worth a full $1620 at retail!

You're sure to win with *Computers & Electronics!*

Whether you win our Sweepstakes or not, the hours you spend on a personal computer—or with home electronics projects—are certain to be winners when you subscribe to *Computers & Electronics* (formerly *Popular Electronics*). It's the Number One magazine in its field—concentrating on computers, but packed with news of audio equipment, communications and electronics.

Why not enjoy a year or more of *Computers & Electronics* at our low introductory prices? You'll save up to 33% if you subscribe at the same time you enter our Sweepstakes!

Atari is a registered trademark of Atari, Inc.

OFFICIAL RULES
No Purchase Necessary

1. On an official entry form or a 3" x 5" piece of paper hand print your name address and zip code Enter as often as you wish but mail each entry separately to Computers & Electronics Sweepstakes P.O. Box 2785, Boulder Colorado 80322 Entries must be received no later than December 31 1983 and the drawing will be held by January 28, 1984 All entries become the property of Computers & Electronics which reserves the right to reprint the name and address of the winner
2. The winner will be selected in a random drawing from among all entries received under the supervision of the publishers of Computers & Electronics whose decision will be final Only one prize will be awarded in this Sweepstakes Winner will be notified by mail and may be required to execute affidavit of eligibility and release Odds of winning will depend on the number of entries received Ziff-Davis will arrange delivery of prize Taxes are the responsibility of the winner Any manufacturer s warranties will apply but Ziff-Davis makes no warranties with regard to any prizes Prize is not transferable No substitutions for prizes
3. Sweepstakes open to all residents of the U.S. its territories and possessions except employees (and their families) of Ziff-Davis Publishing Company its affiliates and its advertising and promotion agencies Void wherever prohibited or restricted by law
4. For the winner's name send a stamped self-addressed envelope to Computers & Electronics Sweepstakes Circulation Department, Ziff-Davis Publishing Company One Park Avenue New York N Y 10016

OFFICIAL ENTRY FORM

Mail to: **Computers & Electronics Sweepstakes**
P.O. Box 2785, Boulder, Colorado 80322

☐ **YES!** Enter my name in the Computers & Electronics Sweepstakes, and start my subscription to *Computers & Electronics* for the term checked:

- ☐ One year (12 issues) only $12.97—19% off!
- ☐ Two years only $22.97—28% off!
- ☐ Three years only $31.97—33% off!

Savings based on full one-year subscription price of $15.97.

☐ **NO** I don't wish to subscribe now, but tell me if I've won the Computers & Electronics Sweepstakes.



CHECK ONE:
☐ Payment enclosed.
☐ Bill me later.

8H526

Mr./Mrs./Ms. _____
(please print full name)

Address _____ Apt. _____

City _____ State _____ Zip _____

Offer valid only in the U.S., its territories and possessions. Please allow 30 to 60 days for delivery of first issue if you subscribe.

Purega: A Management Decision Game

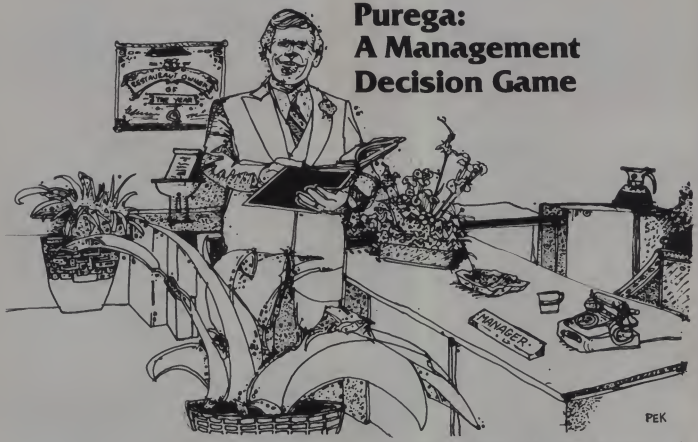

John R. Rousselle

Purega allows the player to be the manager of a 200-seat restaurant. The manager's goal is to maximize profits by properly managing his marketing effort and human resources. He makes up to eight decisions each month dealing with these two aspects of management. In addition, he must decide how much to spend on preventive maintenance.

This game was designed to give students a taste of management decision making, a particularly important and difficult area for management educators to teach. It is currently used by several college hospitality education programs around the country.

After the player has made his decisions, he gets a Sales Summary outlining the success of that month's advertising and promotion. In addition, the summary shows six other things. First, it shows if any sales have accrued this month from the previous month; the amount appears under the Residual heading. Second, the report shows whether any sales have accrued from excess demand in the previous month—Sales Gained By Last Month's Ex Demand. (The restaurant can handle no more than $100,000 per month.)

Third, it shows whether any sales were lost because of bad will generated from the previous month—Sales Lost Last Month's Turnaway. Bad will exists where there is not enough manpower to handle the demand or the total of excess demand carried over from the previous month totals or $100,000—whichever is lower.

John R. Rousselle, Department of Restaurant, Hotel and Institutional Management, Purdue University, West Lafayette, IN 49707.

Fourth, the report shows Total Demand generated for the month. Fifth, it shows if more demand is generated than the restaurant can handle, and sixth, it shows whether sales were lost due to insufficient manpower to meet the Total Demand (up to $100,000). It also shows which position caused the problem—waitressess, cooks, dishmen.

Purega next provides the Profit and Loss Statement and a Labor Force at Month's End statement for the month based upon the player's decisions and assumptions within the program. The program also offers the player an opportunity to see year-to-date figures after each month.

Limits are placed on how much training can be given each employee, how much one can spend on preventive maintenance, advertising, and promotion. These measures, along with the basic assumptions within Purega, are designed to ensure that the results are realistic. Our experience to date suggests that the results of the simulation are consistent with the recent operating results for restaurants of this size.

Although Purega was written for students of hospitality management, the basic concepts are simple enough to be understood by anyone. It may be a nice change of pace after a hard day fighting aliens and slaying dragons. However, the simulation is not a simple one to master.

Most players get fired the first few times they play Purega. (After six months the Board of Directors looks at the profitability of the operation and fires the manager if it is too low.) It is important to note that this is not caused by any tricks hidden in the program. The algorithm is straightforward and will generally yield good results if prudent decisions are made. However, strategic placement of the RND (random number generator) command will prevent the simulation from giving identical results if identical decisions are made throughout the

year. This is certainly consistent with the real world of restaurant management.

In its present form, the program will yield identical results if identical decisions are entered. This may be helpful for those who are interested in Purega as an educational tool and who need to be able to explain results to student users. However, recreational users may want to insert RANDOMIZE, or some similar command, somewhere before line 420 to generate unique results for each new year.

The code is written in Basic-Plus to run on a DEC RSTS-E system.

Playing the Game

You are the new manager of the Purega Restaurant, an established tableservice restaurant that caters to the middle and upper middle class.

As manager, you are responsible to a Board of Directors that is very concerned with the sales and profitability of the restaurant. They are also very concerned with the human relations aspect of the business, so they will be looking at your turnover rate.

Your specific duties are to make nine decisions each month.

1. Advertising: How much to spend.
2. Promotion: How much to spend.



You may spend as much as you wish on each of these. However, your annual limit is $20,000. Moreover, you should realize that the restaurant has the capacity to handle only $100,000 in sales per month. Therefore, even though you may generate a sales demand of $300,000, your sales can be no more than $100,000. Advertising includes radio, newspaper, and TV. Promotion includes coupons and special prices. Each can affect sales differently each month. Furthermore, although a promo-

If you own a printer you recognize the problem: Where to store the paper so it can properly feed into the printer. On the floor the paper is difficult to reach, is vulnerable to damage and is susceptible to jams caused by misalignment. Storing the paper behind the printer is equally frustrating as valuable desk space is wasted.

THE STANDARD™ SOLVES THE PAPER FEED PROBLEM!

The STANDARD solves the paper feed problem by storing hundreds of sheets in an attractive dispenser directly under the printer. Paper is fed properly, is protected from dirt and dust, and space is saved.

The STANDARD is available in two sizes: *Small* (illustrated), accommodates the Epson MX and FX 80, C. Itoh Prowriter, Apple and IBM Dot Matrix and other similar printers. *Large*, fits wider carriage printers such as the Epson MX 100.

Ask your dealer for the STANDARD or order directly by mail.

FLOOR STORAGE

DESK TOP STORAGE

KENSINGTON MICROWARE
919 Third Avenue • NY, NY 10022
(212) 486-7707
Telex: 236200 KEN UR

☐ check enclosed ☐ Visa ☐ Mastercard
Card No. _____
Name on Card _____
Expires _____

Please send
_____ The STANDARD(s) small size, 15⅛" x 13½" $49.95 each Total _____
_____ The STANDARD(s) large size, 23½" x 13½" $64.95 each Total _____
Please add $4.00 shipping and handling per unit. NY state residents include sales tax.

Name _____
Address (for UPS delivery) _____
City _____ State _____ Zip _____ Phone _____

CIRCLE 205 ON READER SERVICE CARD

tion will affect only one month's sales, advertising expense for one month can affect sales in the next month. This effect is noted as Residual in the monthly report:

3. New waitresses: How many to hire.

4. Waitress training: How many hours of training for each one. Maximum of 16 hours.

5. Cooks: How many to hire.

6. Cook training: How many hours for each one. Maximum of 40 hours.

7. Dishmen (DMO): How many to hire.

8. Dishmen training: How many hours for each one. Maximum of 8 hours.

Sales can also be limited by not having enough trained personnel in each position. Each month you must decide how many new people to hire for each position and how many hours of training to give each one. Training costs are $3.00, $8.00, and $4.65 per hour for each waitress, cook, and dishman respectively. These costs are based on hourly wages of $2.25, $6.00, and $3.50 plus the loss in the training employee's productivity. The new employee works with an experienced employee for the duration of his training. This system reduces the productivity of the trainer by 33%, so that cost must be added to the cost of training.

Obviously, the less experienced a new employee is, the fewer sales he can handle. The maximum sales that can be handled by each trained waitress, cook and dishman are: $4000, $16,000,

Variables

A	Amount remaining for advertising and promotion
A5	Current month's advertising result
A6	Residual from last month's advertising
C	Cook manpower
C1	Cooks hired or fired
C2	Cooks available to work
C3	Cook turnover in month
C4	Cook turnover percent
C5	Cook sales limit
C6	Year-to-date cook turnover
C7	Year-to-date cooks on staff
C8	Year-to-date cook turnover percent
D	Dishmen manpower
D1	Dishmen hired or fired
D2	Dishmen available to work
D3	Dishmen turnover in month
D4	Dishmen turnover percent
D5	Dishmen sales limit
D6	Year-to-date dishmen lost
D7	Year-to-date dishmen on staff
D8	Year-to-date dishmen turnover percent
D9	Excess demand
E1	Month's training expense
E2	Personnel administration cost
E3	Month's labor cost
E4	Month's food cost
E5	Month's miscellaneous cost
E6	Month's fixed cost
E7	Month's preventive maintenance cost
E8	Month's repair cost
E9	Month's advertising expense
E$	Employee category with lowest sales capacity
E1$	"In sales lost due to not enough"
E2$	"Too many waitresses for business"
F1	Total controllable expenses
K	Counter
L1	Sales lost
L5	Result of turnaway
L6	Year-to-date turnaway
L7	Year-to-date sales lost
M	Month
M5	Year-to-date miscellaneous cost
P	Month promotion expense
P1	Year-to-date training cost
P2	Year-to-date personnel administration cost
P3	Year-to-date labor cost
P4	Year-to-date food cost
P5	Result for month promotion
P6	Year-to-date fixed cost
P7	Year-to-date preventive maintenance cost
P8	Year-to-date repair cost
P9	Year-to-date advertising expense
Q1	Year-to-date promotion expense
T2	Year-to-date controllable expenses
R1	Excess demand result
R5	Random effect on sales
S	Sales potential
S2	Total demand
S5	Month's sales
T1	Waitress training hours
T2	Cooks training hours
T3	Dishmen training hours
T4	Month's profit or loss
T5	Year-to-date profit or loss
T6	Year-to-date sales
W	Waitress manpower
W1	Waitresses hired or fired
W2	Waitresses available to work
W3	Waitress turnover in month
W4	Waitress turnover percent
W5	Sales limit
W6	Year-to-date waitress turnover
W7	Year-to-date waitresses on staff
W8	Year-to-date waitress turnover percent
W9	Manager's wage

The Program

Lines	Explanation
10-90	Heading and initialization
100-410	Decision sequence
420-510	Generation of sales potential
520-760	Analysis of manpower, capacity, sales potential, and determination of actual sales
770-980	Determine month's turnover and end of month staff
990-1030	Determine repair cost
1040	Begin output sequence
1050-1080	Format statements
1090-1310	Output Sales Summary
1320-1550	Calculate cost
1560-1670	Format statements
1680-1990	Output month's profit and loss statement
2000-2030	Output end of month manpower
2040-2130	Firing sequence
2150	End of year check
2160-2620	Year-to-date information
2630	End of year check
2640-2650	Fired manager check
2660-2710	Format statements
2720-2860	Manager's salary sequence
2870-2880	Continue game check

and $12,000 respectively. This is based on an eight-hour work day, 20-day work month, and $25, $100, $75 sales per hour respectively.

Although a waitress can generate $4,000 per month, this level of productivity requires that she work at 100% of her ability each hour of the day. There is a certain amount of turnover each month. However, the harder she must work, the more likely she is to quit. The same holds for the cooks and dishmen.

Since the waitresses rely on tips, you must be careful not to have too many. If there are too many, their individual tips will be low, and they may quit. Cooks and dishmen are paid by the hour, so this is not a problem for them.

Each time you hire someone there is an administrative cost of $50. Everyone hired must be paid his full wage. Employees may be fired by typing a minus before the number to be terminated when you are asked how many to hire the next month. You will be charged a $50 administrative cost for each fired employee.

9. Preventive Maintenance.

You may spend up to $50 per month on preventive maintenance. This will not guarantee that equipment will not break down, but it may reduce your cost.

The last manager quit and took all of the records. The sales last year averaged about $70,000 per month, and the Board thinks sales were fairly stable. The Board also thinks that the last manager spent about $700 a month for advertising and promotions, but they are not sure.

You will be paid a salary of $20,000 and receive a bonus of .25% of all sales and 5% of profits. However, you will lose 10% on all sales lost due to lack of manpower.

You have a one-year contract that may be renewed at the discretion of the Board of Directors. □

Listing.

```
10 PRINT CHR$(12) \ PRINT TAB(34)$ "P U R E G A "\PRINT\PRINT\PRINT\PRINT
20  PRINT TAB(33)$ " written by "
30  PRINT TAB(22)$ " Department of Restaurant, Hotel,"
40  PRINT TAB(25) $"and Institutional Management"
50  PRINT TAB(31) $ "Purdue University"
60  PRINT\PRINT\PRINT\PRINT
70 DIM E9(15),E7(15),D9(15)
80 DIM E1$(12),E2$(12),L1(15)
90 LET W2=15 \ C2=5 \ D2=5 \ K=3  \ M=0\A=20000
100 PRINT\PRINT\PRINT\ M=M$I \ K = K$I \TI=0\T2=0\T3=0
110 PRINT "DECISIONS FOR MONTH"$ M \PRINT
120  PRINT " You have $"$ A1" available for advertising and promotion"
130 PRINT
140 INPUT "ADVERTISING"$E9(K)
150 IF E9(K)<0 THEN E9(K)=0
160   IF E9(K)>A THEN PRINT "YOU SPENT TOO MUCH!  YOU HAVE$"$ A\GO TO 140
170  LET A=A-E9(K)
180 INPUT "PROMOTION"$P
190 IF P<0 THEN P=0
200  IF P>A THEN PRINT "YOU SPENT TOO MUCH! YOU HAVE $"$A \GO TO 180
210 LET A=A-P
220 PRINT"WAITRESSES. YOU NOW HAVE "$W2$
230 INPUT W1
240  IF(W1+W2)<=0 THEN PRINT "YOU FIRED TOO MANY!"\GO TO 220
250  IF W1<=0 THEN GO TO 280
260 INPUT "WAITRESS TRAINING (HRS PER WAITRESSES)"$T1
270  IF T1>16 THEN PRINT "THAT IS TOO MANY!"\GO TO 260
280 PRINT"COOKS. YOU NOW HAVE "$C2$
290 INPUT C1
300  IF (C1+C2)<=0 THEN PRINT "YOU FIRED TOO MANY!"\GO TO 280
310  IF C1<=0 THEN GO TO 340
320 INPUT "COOK TRAINING (HRS PER COOK)"$T2
330  IF T2>40 THEN PRINT "THAT IS TOO MANY!"\GO TO 320
340 PRINT"DMOS. YOU NOW HAVE "$D2$
350 INPUT D1
360  IF (D1+D2)<=0 THEN PRINT "YOU FIRED TOO MANY!"\GO TO 340
370  IF D1<=0 THEN GO TO 400
380 INPUT "DMO TRAINING (HRS PER DMO)"$ T3
390  IF T3>8 THEN PRINT "THAT IS TOO MANY!"\GO TO 380
400 INPUT "PREVENTIVE MAINTENANCE (UP TO 50)"$E7(K)
410 IF E7(K) >50 THEN PRINT "THAT'S TOO MUCH.";\ GOTO 400
420 A5 = INT(E9(K)#35#RND)      !CURRENT AD RESULT
430 A6 = INT(E9(K-1)#8#RND)     ! RES AD EFFECT
440 P5 = INT(P#(15#RND+5))      ! PRO RESULT
450  L5= INT(.5#L1(K-1)#RND)              ! RESULT OF TURNAWAY - INDIRECT
460 IF L5<0 THEN L5=0
470 L6 = L6+L5
480 IF RND>.5 THEN W=-I ELSE W=I
490 R5 = W#INT(5000#RND)        !RANDOM EFFECT
500 R1 = INT(.4#D9(K-1)#RND)    ! EXCESS DMO RESULT
510 S = 60000+A5+A6+P5+R5+ R1-L5            ! SALES POT##############
520 LET S2=S
530 IF S>100000 THEN D9(K)=S-100000
540 IF S>100000 THEN S=100000
550 W = W2+INT((W1#T1)/16)      ! WAIT MANPOWER
560 C = C2+INT((C1#T2)/40)      ! COOK MANPOWER
570 D = D2+INT((D1#T3)/8)       !DMO MANPOWER
580 W2 = W2+W1                  ! NO WAITRESS
590 W7 =W7+W2
600 C2 = C2+C1                  ! NO COOKS
610 C7 = C7+C2
620 D2 = D2+D1                  ! NO DMO S
630 D7 = D7+D2
640 W5 = W#4000                 ! SALES LIMIT FOR WAIT
650 C5 = C#16000                ! SALES LIMIT FOR COOKS
660 D5 = D#12000                ! SALES LIMIT FOR DMO S
```

Purega, continued...

```
670 IF W5<=C5 AND W5<=D5 THEN S1=W5 \E$= "WAITRESSES" \L1(K)=S-W5 \ GOTO 700
680 IF C5<=W5 AND C5<=D5 THEN S1=C5 \E$= "COOKS" \ L1(K)=S-C5 \ GOTO 700
690 LET S1=D5 \ E$="DMOS" \ L1(K)=S-D5  ! LAST 3 LINES CAL MANPOWER SALES LIM
700 IF L1(K)>0 THEN L7=L7+L1(K)          ! YTD SALES LOST
710 REM ********DETERMINE MONTHLY SALES******
720 IF S1<S THEN S5=S1 ELSE GO TO 750
730 E1$(M)= " IN SALES LOST DUE TO NOT ENOUGH "
740  GO TO 760
750 LET S5=S
760 IF S2>100000 AND S1>100000 THEN D9(K)=S2-100000
770 REM ***********THESE LINES DETERMINE EMPLOYEE LOSS*********
780 IF S/W >3000 THEN GOTO 830
790 W3 = INT(.5*(2300/(S/W))*(.3*W2*RND))       ! WAIT LOST DUE TO LOW TIPS
800 IF W3>INT(.45*W2) THEN W3=INT(.45*W2)
810 E2$(M) = "TOO MANY WAITRESSES FOR BUSINESS.  TIPS TOO LOW."
820 GOTO 850
830 W3 = INT(.5*(S/W)/4000 * (.45*W2)*RND)
840 IF W2-W3<1 THEN W3=W2-1
850 W6 = W6+W3
860 C3 = INT(.5*(S/C)/14000 * (.45*C2)*RND)
870 IF C2-C3<1 THEN C3=C2-1
880 C6 = C6+C3
890 D3 = INT(.5*(S/D)/12000 * (.45*D2)*RND)
900 IF D2-D3<1 THEN D3=D2-1
910 D6 = D6+D3
920 W4 = FNR(W3/W2)
930 C4 = FNR (C3/C2)
940 D4 = FNR(C3/D2)
950 REM ********** EMPLOYEE COUNT AT MONTH END********
960 W2= W2-W3
970 C2= C2-C3
980 D2= D2-D3
990 REM ******REPAIR COST******
1000 IF M=RND(-9 THEN EB=0 \GOTO 1040
1010 EB = INT((K*75)*RND*((S-70000)*.003)*RND
        -(40*E7(K)+(20*E7(K-1))+(E7(K-2))))
1020 REM ****REPAIR COST BASED OF SALES, TIME, AND PREVENT. MAINT.***
1030 IF EB<0 THEN EB=0
1040 REM*******AD$PROMO RESULTS, LABOR SIT. FOR MONTH********
1050 FMT11$="                 &&&&&          &&&&&"
1060 FMT12$="               &&&&&              &&&&&"
1070 FMT13$="                 &&&&&"
1080 FMT14$="                              &&&&&&&"
```

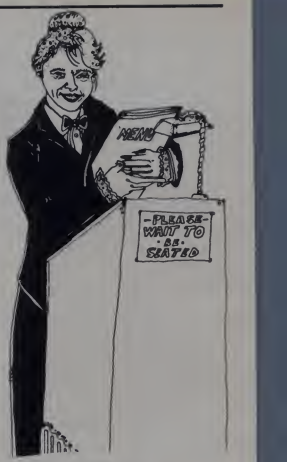

SEPTEMBER 6, 1983
MORNING EDITION

LEGAL NOTICE

TOTAL LEGAL TIME ACCOUNTING... WITH YOUR APPLE,® AND LEGAL //™

This simple cost accounting/service billing system uses formats jointly designed by you, the attorney, and your Apple® or Apple®-compatible computer. Afterwards, operation is so straightforward, a secretary or a typist can do it all, following built-in program prompts. LEGAL //™:

- Generates separate cost accounting and service billing.
- Sorts, files and produces hard copy (lists, labels and invoices) by case type, fee arrangement, responsible attorney, opposing party, etc., for every case and every client.
- Generates updated billing summaries.
- Categorizes by 26 service codes and eight cost codes.
- Produces full text descriptions of services rendered or costs incurred at the push of a single button.

LEGAL //™ for Apple II® II+® //e® and Apple® compatible computers. ONLY $400 plus $2 shipping and handling. Only from:

WINNER'S CIRCLE
2420 Parker Street, Berkeley, CA 94704
(415) 845-4813

Apple, II, II+, and //e are registered trademarks of Apple Computers, Inc

CIRCLE 269 ON READER SERVICE CARD

```
1090 PRINT CHR$(12)
1100 PRINT\PRINT\PRINT,,"MONTH "I#$" RESULTS"
1110 PRINT"**********************************************************"
1120 PRINT\PRINT\PRINT
1130 PRINT,"###SALES SUMMARY###" \PRINT
1140 PRINT "ADVERTISING AND PROMOTION RESULTS" \PRINT
1150 PRINT "  ADVERTISING","EXPENSE","SALES"
1160 PRINT USING"    CURRENT" + FMT11#,E9(K)+A5
1170 PRINT USING "   RESIDUAL" + FMT12#,E9(K-1)+A6
1180 PRINT USING"  PROMOTION" + FMT11#,P+P5
1190 PRINT" SALES GAINED BY"
1200 PRINT USING" LAST MONTH'S EX DEMAND" + FMT13#,RI
1210 PRINT" SALES LOST BY"
1220 PRINT "LAST MONTH'S TURNAWAY",,"<"#L5#">"
1230 PRINT
1240 PRINT USING"  TOTAL DEMAND" + FMT14#,S2
1250 PRINT "(INCLUDES NATURAL DEMAND)"
1260 PRINT\PRINT
1270 IF S2-100000<=0 THEN I300
1280 PRINT "$"#52-100000!" MORE IN DEMAND THAN"
1290 PRINT"THE RESTAURANT CAN HANDLE."
1300 PRINT\ IF E1$(M)<>" " THEN PRINT LI(K)#E1$(M)#E$#" !!!" \ PRINT CHR$(7)
1310 INPUT "PRESS 'RETURN' TO CONTINUE"#Y2$
1320 REM#######CALCULATE COST######
1330 E1 = INT((T1#W#2.66)+(T2*CI#B)+(T3#D1#4.65))    'TRAINING
1340 P1=E1          ' YTD TRAINING
1350 E2 = INT((W1+C1+D1)#50+.5) \ IF E2<0 THEN E2=0                    ' NEW HIRE
1360 P2 = P2+E2          'YTD NEW HIRE
1370 E3 = INT (5000+(W2#480)+(C2#1120)+(D2#720)+.5)          ' LABOR
1380 P3 = P3+E3                                               ' YTD LABOR
1390 E4 = INT (6000+(S5#.31))                          ' FOOD
1400 P4 = P4+E4                                        ' YTD FOOD
1410 E5 = INT (4000+S5#.06)                            ' MISC CONT
1420 M5 = M5+E5                                        ' YTD MISC CONT
1430 E6 = INT(4000+S5#.01)                             ' FIXED
1440 P6 = P6+E6                                        ' YTD FIXED
1450 E7(K) = E7(K)                                     ' PRE MAIT INPUT
1460 P7 = P7 +E7(K)
1470 E8 = E8                                                 ' REPAIR (CAL 225)
1480 P8 = P8+E8                                        ' YTD REPAIR
1490 P9 = P9+E9(K)                                     ' YTD ADVER
1500 O1 = O1+P                                         ' YTD PROMO
1510 F1 = E1+E2+E3+E4+E5+E7(K)+E8+E9(K)+P              ' YTD CONT EXP
1520 O5 = O5+F1                                        ' YTD TOT CONT EXP
1530 T1 = S5-F1-E6                                           ' PROFIT / LOSS
1540 T5 = T5+T1                                              ' YTD P/L
1550 T6 = T6+S5
1560 FMT1$="                    $$######                      $$.$$"
1570 FMT2$="                      $$#####                       $$.$$"
1580 FMT3$=" "                      $$###                       $$.$$"
1590 FMT4$="                          $$#                       $$.$$"
1600 FMT5$="                    $$####                        $$.$$"
1610 FMT6$="                      $$###                       $$.$$"
1620 FMT7$="                        $$##                      $$.$$"
1630 FMT8$="                    $$####                      $$$.$$"
1640 FMT9$="                              $$$$$$$$        $$$.$$"
1650 FMT10$="                               $$$$                $$.$$"
1660 FMT15$="                                          $$$$$$$$    $$$.$$"
1670 FMT16$="                                    $$$$$$      $$$.$$"
1680 REM####### MONTHS P/L STATEMENT ########
1690 DEF FNR(A) = INT(A#10^4+.5)/(10^2)
1700 PRINT "##################" \PRINT\PRINT
1710 Z=100.00
1720  PRINT CHR$(12)
1730 PRINT\PRINT "PROFIT AND LOSS STATEMENT"\PRINT\PRINT
1740  PRINT"                                  TOTAL          PERCENT"
1750 PRINT USING "SALES" + FMT15#,S5,Z
1760 PRINT "EXPENSES"\PRINT
1770 PRINT USING " FOOD & BEV" + FMT1$,E4,FNR(E4/S5)
1780 PRINT USING " LABOR" + FMT2$,E3,FNR(E3/S5)
1790 PRINT USING " TRAINING" + FMT3$,E1,FNR(E1/S5)
1800 PRINT USING " HIRING" + FMT4$,E2,FNR(E2/S5)
1810 PRINT USING " ADVERTISING" + FMT5$,E9(K),FNR(E9(K)/S5)
1820 PRINT USING " PROMOTIONS" + FMT6$,P,FNR(P/S5)
1830 PRINT USING " PREV. MAINT." + FMT10$,E7(K),FNR(E7(K)/S5)
1840 PRINT USING " REPAIR" + FMT7$,E8,FNR(E8/S5)
1850 PRINT USING " MISC. CONT." + FMT8$,E5,FNR(E5/S5)
1860 PRINT
1870 PRINT USING "CONT. EXPENESE" + FMT9$,F1,FNR(F1/S5)
1880 PRINT
1890 PRINT USING "FIXED EXPENSES" + FMT9$,E6,FNR(E6/S5)
1900 PRINT
1910 PRINT USING "TOTAL EXPENSES" + FMT9$,F1+E6,FNR((F1+E6)/S5)
1920 PRINT TAB(25)"**********************************"
1930  IF T1:=0 THEN GO TO 1960
1940 PRINT\PRINT "PROFIT <LOSS>"#
1950 PRINT,,"  "#T1#-1#" ",FNR((T1#-1)/S5)  \ GOTO 1990
1960 PRINT
1970 PRINT USING "PROFIT <LOSS>" + FMT16$,T1,FNR(T1/S5)
1980 PRINT
1990 INPUT "PRESS 'RETURN' TO CONTINUE"#Y2$
```



CLASSROOM SOFTWARE

for the 16K TRS-80

Easy to use software for models I and III with tape, disk or network. Complete manuals plus on-screen instructions. As simple as typing CLOAD and RUN.

Each program recorded twice on a separate side of a quality, long-lasting cassette.

CLASSROOM PACKS Each has 4 programs in a subject area and permits self-paced study with unlimited running time. Choice of review or self-test modes plus progress reports and help feature. Missed questions are corrected and recalled until learned. **Price $44.95 each**

- Geography I
- U.S. Government I
- U.S. History I
- Driver Education
- Electronics I
- Music Theory I

Other outstanding cassette software

- Logic Games Package — $24.95
- Anagrams — $19.95
- Scramble-Grams — $19.95

30-DAY GUARANTEE

At local dealers or order direct

Educational Media Associates

Software Products
342 West Robert E. Lee
New Orleans, LA 70124

MC & VISA include card # and expiration date. Free shipping on prepaid and credit card orders. Others add $1.50 per package

CIRCLE 171 ON READER SERVICE CARD

Happy Hands

Offers Discounts on All

TRS-80™ COMPUTERS

We Have What You Are Looking For

Free Shipping Within United States

- *100% New Original Equipment*
- *Prices Comparable to Any Other*
- *No Tax On Out of State Shipments*

For Prices and Shipping Information Call Toll Free 1-800-545-9019

N.M. Residents Call 257-7865

or write

HAPPY HANDS
P.O. DRAWER 1
RUIDOSO, NEW MEXICO
88345

CIRCLE 183 ON READER SERVICE CARD

Purega. continued...

```
2000 PRINT\PRINT "********************"
2010 PRINT\PRINT "LABOR FORCE AT MUNTH'S END" \PRINT
2020 IF E%*(M)<0 * THEN PRINT E%(M) \PRINT
2030 PRINT" WAITRESSES";W2,"COOKS";C2,"DMOS";D2
2040 IF M<>6 THEN 2150
2050 IF T5>1000 THEN 2150
2060 INPUT "PRESS 'RETURN' TO CONTINUE";Y2$
2070 PRINT CHR$(12) \ PRINT CHR$(7)
2080 PRINT\PRINT "!!!
```

Sample run.

```
                    P U R E O A

                        written by
              Department of Restaurant, Hotel,
                and Institutional Management
                    Purdue University


DECISIONS FOR MONTH 1

 You have $ 20000  available for advertising and promotion

ADVERTISING? 5000
PROMOTION? 1000
WAITRESSES. YOU NOW HAVE  15 ? 10
WAITRESS TRAINING (HRS PER WAITRESS)? 16
COOKS. YOU NOW HAVE  5 ? 0
DMOS. YOU NOW HAVE  0 ? 0
PREVENTIVE MAINTENANCE (UP TO 50)? 50


                        MONTH  1  RESULTS
**************************************************


            ***SALES SUMMARY***

ADVERTISING AND PROMOTION RESULTS

  ADVERTISING          EXPENSE       SALES
    CURRENT              5000       35863
    RESIDUAL                0           0
  PROMOTION              1000       12996
 SALES GAINED BY
 LAST MONTH'S EX DEMAND                  0
 SALES LOST BY
LAST MONTH'S TURNAWAY                < 0 >

  TOTAL DEMAND                      104941
(INCLUDES NATURAL DEMAND)


$ 4941  MORE IN DEMAND THAN
THE RESTAURANT CAN HANDLE.

 20000  IN SALES LOST DUE TO NOT ENOUGH COOKS !!!

PRESS 'RETURN' TO CONTINUE?
??????????????????
PROFIT AND LOSS STATEMENT

                                        TOTAL        PERCENT
SALES                                   80000         100.00
EXPENSES

 FOOD & BEV              30800                         38.50
 LABOR                   22040                         27.55
 TRAINING                 1064                          1.33
 HIRING                    500                          0.63
 ADVERTISING              5000                          6.25
 PROMOTIONS               1000                          1.25
 PREV. MAINT.               50                          0.06
 REPAIR                      0                          0.00
 MISC. CONT.              8800                         11.00

CONT. EXPENESE                          69254         86.57

FIXED EXPENSES                           4800          6.00

TOTAL EXPENSES                          74054         92.57
                        ****************************************

PROFIT <LOSS>                            5946          7.43

PRESS 'RETURN' TO CONTINUE?

??????????????????

LABOR FORCE AT MONTH'S END

 WAITRESSES 21              COOKS 3        DMOS 5
DO YOU WANT YEAR TO DATE RESULTS ? N
```

THE SWIFT AND EASY WAY TO EDUCATIONAL SOFTWARE

Apple II, II Plus, IIe

- *How to Program in the BASIC Language (Tutorials)*—$74.95.
- *Discover BASIC: Problem Solving with Computers.* Teacher's Guide—$74.95. Student Workbook—$5.95.
- *Elementary Mathematics Classroom Learning System.* Set 1—Whole Numbers. Set 2—Fractions/Decimals. With management system. English or Spanish. Each set—$495.00.
- *The Arithmetic Classroom.* 8 programs for classroom or home, each—$49.95, plus Games—$29.95.
- *Computer Programming for Kids and Other Beginners*—$9.95.
- *Dial-A-Command*—$9.95.
- *The Money Manager*—$74.95.
- *Music Readiness*—$69.95.

IBM PC

- *How to Program in the BASIC Language (Tutorials)*—$74.95.
- *Discover BASIC: Problem Solving with Computers.* Teacher's Guide—$74.95. Student Workbook—$5.95.
- *Elementary Mathematics Classroom Learning System.* Set 1—Whole Numbers. Set 2—Fractions/Decimals. With management system. English or Spanish. Each set—$495.00.
- *The Arithmetic Classroom.* 8 programs for classroom or home, each—$49.95, plus Games—$29.95.
- *Computer Programming for Kids and Other Beginners*—$9.95.

Commodore 64 PET 2000 & 4000 Series

- *How to Program in the BASIC Language (Tutorials)*—$74.95.
- *Fundamentals of Mathematics.* 6-disk set—$249.95.

STERLING SWIFT PUBLISHING COMPANY
7901 South IH-35, Austin, TX 78744
HOTLINE (512) 282-6840
WRITE FOR CATALOG

CIRCLE 252 ON READER SERVICE CARD

Purega, continued...

```
DECISIONS FOR MONTH 2

 You have $ 14000  available for advertising and promotion

ADVERTISING? 100
PROMOTION? 200
WAITRESSES. YOU NOW HAVE  21 ? 0
COOKS. YOU NOW HAVE  3 ? 10
COOK TRAINING (HRS PER COOK)? 40
DMOS. YOU NOW HAVE  5 ? 0
PREVENTIVE MAINTENANCE (UP TO 50)? 0
```



```
                          MONTH  6  RESULTS
****************************************************************


            ***SALES SUMMARY***

ADVERTISING AND PROMOTION RESULTS

  ADVERTISING              EXPENSE      SALES
    CURRENT                   1000      31379
    RESIDUAL                  2000       8051
  PROMOTION                    500       9628
 SALES GAINED BY
 LAST MONTH'S EX DEMAND                    283
 SALES LOST BY
LAST MONTH'S TURNAWAY                   < 1040 >

  TOTAL DEMAND                          110094
(INCLUDES NATURAL DEMAND)

$ 10094  MORE IN DEMAND THAN
THE RESTAURANT CAN HANDLE.

 16000  IN SALES LOST DUE TO NOT ENOUGH DMOS !!!

PRESS 'RETURN' TO CONTINUE?
*****************
PROFIT AND LOSS STATEMENT


                                          TOTAL      PERCENT
SALES                                     84000       100.00
EXPENSES

 FOOD & BEV                 32040                      38.14
 LABOR                      29800                      35.48
 TRAINING                    1714                       2.04
 HIRING                       650                       0.77
 ADVERTISING                 1000                       1.19
 PROMOTIONS                   500                       0.60
 PREV. MAINT.                   0                       0.00
 REPAIR                       541                       0.64
 MISC. CONT.                 9040                      10.76

 CONT. EXPENESE                          75285         89.63

 FIXED EXPENSES                           4840          5.76

 TOTAL EXPENSES                          80125         95.39
                          **********************************

 PROFIT <LOSS>                            3875          4.61

 PRESS 'RETURN' TO CONTINUE?

 *****************

 LABOR FORCE AT MONTH'S END

  WAITRESSES 24          COOKS 8        DMOS 6
 PRESS 'RETURN' TO CONTINUE?

 !!!!!!!!!!!!!!!!!!!!!

  THE BOARD OF DIRECTORS HAS DECIDED TO FIRE YOU!!!
  A LOSS OF $ 10997  IN SIX MONTHS IS UNACCEPTABLE.
  YOU WILL BE PAID THE FULL SALARY BUT DON'T LET THE
  DOOR HIT YOU IN THE @*$! WHEN YOU LEAVE.

  PRESS 'RETURN' TO CONTINUE ?
```

```
RESULTS FOR YEAR

                                    TOTAL        PERCENT
SALES                              413181         100.00
EXPENSES

 FOOD & BEV          164086                        39.71
 LABOR               155440                        37.62
 TRAINING              7413                         1.79
 HIRING                3250                         0.79
 ADVERTISING          11100                         2.69
 PROMOTIONS            4700                         1.14
 PREV. MAINT.            90                         0.02
 REPAIR                1178                         0.29
 MISC. CONT.          48790                        11.81

CONT. EXPENSES                     396047         95.85

FIXED EXPENSES                      28131          6.81

TOTAL EXPENSES                     424178        102.66
                  ****************************************

PROFIT <LOSS>                      - 10997 -      -2.66

**********

TURNOVER FOR YEAR

            WAITRESSES    COOKS      DMOS         TOTAL
LOST            31           7         17           55
PERCENT        147.62       84        167.21       139.24

**********

SALES LOST BY
   TURNAWAY - DIRECT                < 132827 > !!
   TURNAWAY - INDIRECT              < 13555 > !!
PRESS 'RETURN' TO PICK UP YOUR CHECK?

**********

  YOUR WAGE FOR THE YEAR.

 SALARY        20000.00
 SALES COM      1032.95
 PROFIT COM     -549.85
               ********
 SUBTOTAL      20483.10
 PENALTY FOR
  SALES LOST    14638.2
               ********
 TOTAL WAGE     5844.90
```

GREAT BOOKS FROM *CREATIVE COMPUTING PRESS* FOR APPLE, ATARI, AND TRS-80* OWNERS!

Here are the books that Apple, Atari and TRS-80 owners have been waiting for—three informative, challenging and stimulating collections of articles and features from *Creative Computing*. *The Creative Apple*, *The Creative Atari* and *The Creative TRS-80* each present a wealth of revised and updated material to help you make the most of your computer.

Each *Creative* volume features chapters covering such areas as graphics, commercial programs, programming tips and techniques, games, and business and personal applications.

Filled with useful information for both the new owner and the experienced programmer, these creative guides will help you exploit the potential of your Apple, Atari or TRS-80 in ways you never dreamed of!

Each volume is 8½" x 11", softcover, illustrated, $15.95.

For faster service, PHONE TOLL FREE:
(In NJ only, 201-540-0445) **800-631-8112**

Also available at your local bookstore or computer store.



CREATIVE COMPUTING PRESS
Dept. HD1C, 39 East Hanover Avenue
Morris Plains, NJ 07950

Send me _____ *Creative Apple* at $15.95* plus $2.00 postage and handling each. **#1BR**

Send me _____ *Creative Atari* at $15.95* plus $2.00 postage and handling each. **#1BB**

Send me _____ *Creative TRS-80* at $15.95* plus $2.00 postage and handling each. **#1BY**

☐ **PAYMENT ENCLOSED $_____.** *Residents of CA, NJ and NY State add applicable sales tax. Outside USA add $3.00 per order

☐ **CHARGE MY:**
☐ American Express
☐ MasterCard ☐ Visa

Card No._____ Exp Date_____

Signature_____

Mr./Mrs./Ms._____
(please print full name)

Address_____Apt._____

City_____

State/Zip_____

☐ Send me a FREE *Creative Computing* Catalog

e cart...apple cart...apple

Stephen Arrants

It is October as your read this, though it is July as I write it. Days are getting shorter, cooler, and the trees in the Northeast are turning. Indian Summer is here. As I write this, we are just getting over a heat wave in the Northeast. With weather like this, hacking seems like the only sane activity. This month's column will feature a few more utilities you might find handy, a few reviews, and some useful information. So why not sit back and enjoy?

Fixing FID

For a while, I had just one disk drive. Some programs, such as FID, were constantly asking me for slot and drive numbers. I didn't like to be reminded by a hunk of metal and plastic that I couldn't afford another drive. I had been spending all my free cash to feed it things like *Deadline*, *Apple Writer*, and *Germany 1985*. I had to find a way to stop the program from tormenting me.

So, I came up with FFID, or the Fixed FID. What this short program does is amend FID so that it doesn't ask you silly questions. Now that I have a second drive, I could further amend it so that it automatically sets the slot and drives for my system. Slot 6, drive 1 for the read, slot 6, drive 2 for the write. For now, I will just give you the first rogram. See Listing 1.

To make this work, type the program in and amend line 40 if your drive isn't in the usual slot 6. Then BLOAD FID, EXEC FIXER, and BSAVE FFID, A2051, L4686. That's it. Quick, simple, and permanent.

Don't BSAVE this as FID; you may need an unaltered version at a later date. Since FID loads into the same area as an Applesoft program, I felt that the EXEC approach would be best. You could, of course, BLOAD FID and POKE in the values in line 70. That also works.

Poor Man's Lowercase

You say you have an Apple II+ without lowercase? You are tired of entering complicated codes to make your printer give you lowercase? I have just the fix for you. Although the Apple II+ can't display lowercase unless a modification is made, none is really needed by a printer. Most printers will display lowercase when 32 is added to the ASCII code of a letter.

Usually, this is done by hitting a CTRL character as an indicator and processing each character in Basic. Clumsy. Slow. Inefficient. It would be much better to intercept the output and add 32. After all, computers are supposed to be efficient, right? Enter this routine (Listing 2), which is for an Apple II or II+ with DOS 3.3 and a printer in slot 1.

This short routine is stored at location $BA69 and is not permanent. CTRL-S is used to toggle lowercase on/off. If a different character is desired, change the value at $BA6D. The routine is selected by the program in Listing 2.

All hooks are returned to their normal values by the "PR#0" in line 70. PR#1 isn't needed, since JMP at the end of the routine selects the printer slot, number 1.

After the routine is typed in and you have checked it for errors, save it as follows. BSAVE LC,A$BA69,L$2A. That's it! Simple, quick, and clean.

Ah! But there's another modification we can make. Suppose we want a line in mixed *normal* and *inverse* display. We could split the line up with various commands, which looks sloppy and can cause formatting headaches. We could also write a machine language program to save us the trouble. The routine in Listing 3 does just that.

Again, CTRL-S is used as the toggle, but you can change it to suit your needs. Turn it on with the following: POKE 40196, 105: POKE 40197, 186. Turn it off with POKE 40196, 189: 40197, 158.

Look at $BA6F. If we change the value to 7E, we will get a flashing character instead of inverse. Save with the following: BSAVE INV,A$EA69,L$10. Remember: don't add spaces between the commas!

Lazarus, or Bringing a Program Back From the Dead

From time to time, we all do stupid things with the Apple. How many times have you typed in a program and then entered INT, FP, or NEW? Our next little routine (Listing 4) may help you recover lost material. I call it Lazarus, since it brings some programs back from the dead.

How does this work? Well, when you do an FP, INT, or NEW, you don't actually get rid of a program. It is still lurking somewhere in your Apple. If you ran the short program from August, you probably saw bits of old programs floating around, unless you started out fresh. The trick is to get the deceased program back where you can SAVE or RUN it.

When you NEW something, you tell the Apple to set some bytes as nulls ($00). From then on, the Apple treats that program as if it had never existed, except in some dusty corner of memory. What we have to do is reset these bytes and bring the dead to life. Not a miracle, just a few lines of machine language.

Save this program as BSAVE LAZARUS,A$2BF,L$41.

Letters, Errors And Omissions

In the August Apple Cart I mentioned that the Rev. B board may be un-

Listing 1.

```
10  REM   THIS IS THE LETTER AFTER N -->O   THIS IS A ZERO -->0
20 D$ = CHR$ (4)
30 P$ = "FIXER"
40 B = 6
50  PRINT D$"OPEN"P$
60  PRINT D$"WRITE"P$
70  PRINT "POKE 4895,"B": POKE 4896,"B" POKE 4893,1:POKE 4894, 1 POKE2328
    1,255:POKE2362,96 POKE2439,96 POKE4899,255"
80  PRINT D$"CLOSE"P$
```

Listing 2a.

```
10  REM   THIS IS THE LETTER AFTER N--> O   THIS IS A ZERO--> 0.
20  REM   >>>THE LOWER CASE PROGRAM MAY NOT WORK ON ALL PRINTERS <<<
30 D$ = CHR$ (4)
40  PRINT D$"BLOAD LOWER-CASE"
50  POKE 43620,105 : POKE 43646,186.
60  PRINT "TESTING LOWER CASE      "  REM  CTRL-S EMBEDDED IN THIS LINE
70  PRINT D$"PR#0"
```

necessary at this time because there is no commercial software available to take advantage of the double hi-res graphics it allows. Jerry Van Cleeff of Montgomery, AL wrote in to take me to task for this statement.

I agree with him that you can write your own routine to get the 560 × 192 resolution graphics. But I would think twice about rushing out to buy the 80-column extended memory card and getting a Rev. B board simply to see 16 colors in double hi-res. Until good software is available, I would wait. True, Apple is still offering the upgrade for free, but that is not reason enough to buy the 80-column extended memory card.

By the way, the July 1983 issue of *Softalk* has an excellent article by Don Worth on how to run and understand double hi-res graphics on the IIe.

I stand by my statement to be careful when using *What's Where in the Apple*. Although Apple has been careful to keep monitor entry points and soft switches the same as in the Apple II+, not everything is the same. It is a new machine, Jerry.

Oops! There may be a problem when using the program in Listing 1 from August. On the IIe, it will crash when it turns on the soft switch at location 49237, where page 2 is selected. Jerry suggests hitting CTRL-C, typing TEXT, and then continuing. The program will crash again at location 49280, where it selects an alternate bank of RAM, entering the land of no return. RESET to get out. Skip locations 49152 to 53247 for painless execution. Apparently, these soft switches aren't the same, Jerry.

This little bug shows up the differences between the II+ and IIe. The program runs fine on a II or II+. On the IIe, there are problems. If you really want to see something strange, run it with an 80-column extended memory card. Talk about locking-up!

Thanks for the letter, Jerry. It is people like you who keep me on my toes. To the other letter writers, thanks for the compliments, complaints, and queries. I can't answer every letter, but a SASE ensures a reply.

In last month's column, a reader wanted information on using an Apple in sailboat navigation. Well, a few people in our book division, politely mentioned *Computers for Sea and Sky* by Stephen J. Rogowski. It is published by Creative Computing Press and sells for $9.95.

This collection of programs for sailing, aviation, navigation, astronomy, and surveying is quite nice. Mr. Rogowski is a licensed pilot and an FAA ground instructor, so he knows what he is doing. He is not a bad writer, either. Not only does he give you over 50 programs, but he explains in clear language how they work and what they can and can't do. A list of references is included to help you write more advanced programs on your own.

Listing 2.

```
*BA69.BA92

BA69- 8D 92 BA C9 93 D0 09
BA70- A9 20 38 ED 91 BA 8D 91
BA78- BA AD 92 BA C9 C1 30 0E
BA80- AD 92 BA C9 DA 10 07 AD
BA88- 92 BA 18 6D 91 BA 4C 03
BA90- C1 00 00
```

Listing 3.

```
*BA69.BA76

BA69- 48 C9 93 D8 07 A9 3E
BA70- 38 E5 32 85 32 68 4C
```

Listing 4.

```
*02BD.02FF

02BD- A0 04 C8
02C0- B9 00 08 D0 FA C8 8C 01
02C8- 08 A9 08 8D 02 08 85 01
02D0- A0 00 A2 03 A9 00 85 00
02D8- C8 D0 02 E6 01 B1 00 D0
02E0- F3 E6 00 E4 00 D0 F6 18
02E8- 98 69 03 A8 AF 85 49 85
02F0- 4B 85 4D A5 81 49 00 85
02F8- 80 85 4A 85 4C 85 4E 60
```

New Products

Verbatim Corporation sent me a disk diagnostic package the other day. I have mixed feelings about diagnostics packages. It is nice to know when something is wrong, but if you are like me, you know that knowledge can cause paranoia and depression. I mean, knowing that your disk drive heads are out of alignment at 2:00 a.m. is informative, but then try and get to sleep! Still, it is a useful product.

I now know why I kept losing disks—my secondary drive was poorly aligned. One warning—if a drive has serious problems, test your disks on a good drive. If the good drive doesn't read them properly, copy them over from the bad drive to new disks on the good drive. Otherwise, you may not be able to recover data.

What the *Disk Drive Analyzer* does is perform four comprehensive tests covering head alignment, disk clamping (how tightly the drive holds your disk in place), read/write accuracy, and disk speed. Your drive is evaluated as good, fair, or poor and rated pass or fail, indicating whether tested areas require adjustment or repair.

Verbatim claims that is the only product that effectively tests drive alignment without taking the drive apart. The price seems a bit steep, however, at $69.95. As a special introductory offer, Verbatim will send you a head cleaning kit or a twin pack of mini disks when you return the warranty card.

Inside the Apple

For the hardcore hackers and hobbyists, a new book has hit the racks that may be just what you are looking for. *The Apple II Circuit Description* by Winton Gayler from Howard Sams is a large book stuffed with all sorts of hardware information on Apples from Rev. 0 to RFI Rev. D. Although the IIe is not covered, this is still a very valuable book. It is tough, thorough, and labyrinthine.

Six chapters examine every bit of the Apple circuitry. You get information on the 6502, on I/O, video display, and timing. Chock full of diagrams and schematics, this book makes a good addition to your library.

One surprise is that all the schematics and diagrams are readable. I am used to cramped little sketches that resemble bad road maps. Mr. Gayler did a monumental job in writing the book. It is well-organized and well-planned.

Apple II Circuit Design isn't for everybody. You do need some prior knowledge of electronics to understand most of the concepts. But for the serious hacker and hobbyist, as well as anyone involved in repairing Apples, this may be one of the most important and informative books you will own.

Finally

That's it for this month. I've decided *not* to give you the program I promised for recovering a deleted file. Instead, it will be part of a longer program presented over the next few Carts. This longer program is a disk utility that will allow you to examine and edit a track and sector, recover a lost file, hide files that you don't want seen, and customize DOS the way you want it. See you in November.



...print about printers...

John J. Anderson

An anecdote. Before this column became a column, it was the second installment of a printer round-up. Someone here told me that C. Itoh had called, and in the article I kidded to be sorry it had not been Mr. Itoh himself—for I would have liked to ask him what the C stood for.

From San Francisco, Mr. Philip C. Huang: "I read with great interest your article. . . in which you mentioned that you would like to know what the C stands for in C. Itoh. . . C. Itoh is a major trading company in Japan. The C stands for 'Chu,' which literally means 'loyalty' in Japanese. In this case, Chu was the given name, and Itoh was the surname of a person. . . perhaps the founder of the company, which was established in 1949."

Fascinating, Mr. Huang, and thank you. Now what does the C in *your* name stand for?

SuperScripsit Feedback

More from the mailbag. This letter is from Barton Hendrix, of Oakdale, CA, though we have received more than one letter along these lines:

"As one who uses a TRS-80 Line Printer VI with *SuperScripsit*, I was anxious to read Ted Byrne's article on the subject in your June 1983 issue. I hoped that it would contain some new ideas to play with. To say the least, I was disappointed. Mr. Byrne devoted his article to explaining how he wrote an auxiliary program to set pitch and line spacing on his printer before loading *SuperScripsit*. Didn't he read the program documentation?

"*SuperScripsit* uses the Daisywheel II driver to operate the LP VI and, as a result, there are some functions that do not operate exactly as intended. However, the program does provide for 20 user-programmed 'printer-code' keys. They allow the inclusion of special character codes. If the character width is set at zero, these keys work equally well to change line spacing or pitch. There are, however, a few things to keep in mind.

"• Whenever the LP VI receives a control code to change pitch or line spacing it will begin a new line at column 0. For that reason you cannot mix two pitches in one line. You should not include text between control codes and a carriage return.

```
xA  2  0  1B13   Ord. Size          xN  1  1  AA   Registered
xB  2  0  1B11   Propor. Size       xO  1  1  AB   Copyright
xC  2  0  1B14   Comp. Size         xP  1  1  AC   1/4
xD  2  0  1B0E   Start Elong.       xQ  1  1  AD   3/4
xE  2  0  1B0F   End Elong.         xR  1  1  AE   1/2
xF  1  0  0F     Start U-line       xS  1  1  BA   Trademark
xG  1  0  0E     End U-line         xT  1  0  14   WP Init.
xH  2  0  1B1C   Half-Line Dn       xU  0  0
xI  2  0  1B1E   Half-Line Up       xV  1  1  EF   Fuzzy Sqr.
xJ  2  0  1B38   3/4 Line Dn        xW  1  1  FB   Fuzzy UL
xK  2  0  1B0A   1 Line Up          xX  1  1  FC   Fuzzy LR
xL  0  0                          xY  1  1  FD   Fuzzy UR
xM  0  0                          xZ  1  1  FE   Fuzzy LL

Which control code whould you like to change?
Enter A - Z, ESC to store, BREAK to cancel, or HOLD to restore previous:
```

Figure 1. Scripsit printer control codes.

```
.I
.
.  SCRIPSIT_0 is produced by .B_Radio Shack_B.F to run on TRS80 computers.
.  In addition to normal size characters, printer controls
.    can be set to print .Ccondensed characters, .Bproportional spaced characters, .Anormal
elongated characters, .Celongated condensed
.    characters, and .Bproportional elongated characters.B.F

.  Of course there may be other printer functions you wish to call on,
.  including:

.  .V.V.V.
```

GenTech

Shop early for Christmas

THIS MONTH'S SPECIALS

OTRONA ATTACHE	$2595
BASIS 108 128K CP/M 3.0	$1999
PROWRITER I	$369
EPSON FX-100	$725
TELEVIDEO 803	$1995
RANA ELITE I	$265
RANA ELITE II	$415
RANA ELITE III	$535
BUFFERED GRAPPLER	
16K	$199
32K	$229
64K	$259
MULTIPLAN	
IBM, Apple II/IIe	$189
IBM PC DSDD Drive	
RANA	$299
QUENTIN	$275
FOURTH DIMENSION	$275
LOGO	
Terrapin	$119
Krell	$85

Call 401-273-2420, 274-0330 for Customer Service & Tech Support. Ask for New Catalog

ORDERS ONLY

800-843-4302

150 Broadway, Suite 2212, N.Y., NY 11038

Money Order, Cashier's Check, Personal Check, C.O.D. Honored. Add 1% on Credit Card.

MasterCard VISA

CIRCLE 166 ON READER SERVICE CARD

COMPUTERS

FRANKLIN
ACE 1000 w/color ... $845

ACE PRO System
ACE 1000 w/Color, ACE 10 Drive, 80-Column Card, ACE Writer II, ACE Calc (80-Column Spreadsheet) ... $1295

ACE 1200 (128K) Dual Processor, 1 Drive, 80-Column, CBASIC, CP/M, DDS ... $Call



COLUMBIA
128K RAM, DUAL OSDD Drives (640K) Fully IBM compatible
w/Superpack ... $2695
128K RAM, 10 MB Hard disk w/Superpack ... $3950
Portable VP w/Superpack ... $2495

DIGITAL
RAINBOW ... $Call

EAGLE
PC-2 128K RAM w/2 DR (640K) ... $2695
PC-XL 128K RAM 1 DR, 10 MB HARD ... $3595

KAYPRO
KAYPRO II 64K w/software ... $1499
KAYPRO IV 64K w/software ... $Call
KAYPRO 10 64K w/10 MB hard disk ... $Call
IBM compatible 128K or 256K board w/MS-DOS & CP/M 86 ... $Call

OSBORNE
Osborne 1 ... $Call
Osborne Executive ... $Call

PIED PIPER ... $1099

VICTOR 9000 (128K, 1.2 MB DISC) ... $2795

PLOTTERS

BAUSCH & LOMB
OMP 20 ... $899
OMP 40 (8 color 11x17 paper) ... $1995
OMP 41 (single pen 22x17 inch) ... $2795

FOR APPLE II/IIe, Franklin Ace

Grappler + ... $119
Graphiti ... $95
16K RAM ... $49
Plasso card ... $125
Microtak Dumpling GX ... $109
Microtak Dumpling 16 (16K) ... $159
Microtak Magnum-80 (80 col) ... $Call
Fourth Dimension Super Drive ... $239

FOR IBM PC

AST RESEARCH INC.
COMBO PLUS
64K w/Serial & Parallel ... $309
128K $369, 192K $419, 256K $499

I/O PLUS ... $132
Serial $39, Parallel $39, Game $39

MEGA PLUS
64K w/Serial & Clock ... $309
128K $399, 192K $479, 256K $519
64K w/Serial & Parallel ... $399
128K $459, 192K $519, 256K $599
MEGA PAK 256K Module ... $309

QUADRAM
QUADBOARD
64K ... $279
256K ... $419

512+ EXPANSION BOARD
Quad 512+ (64K) ... $219
Quad 512+ (256K) ... $379
Quad 512+ (512K) ... $509

QUADLINK ... $519

MICROFAZER
Parallel/Parallel — P/P
8K $348, 64K $229, 128K $329
256K $680, 512K $945
S/P, P/S, S/S
8K $145, 16K $165, 32K $195, 64K $229
Serial/Parallel
8K $185, 64K $229
9V Power Supply ... $16.99

HARD DISK



COMPLIER
10 MB FDR QX-10 ... $1995

CORVUS
5 MB $1825 — 8 MB w/Mirror $2545
10 MB $2695 — 12 MB w/Mirror $3315
20 MB $3695 — 18 MB w/Mirror $4115
Multiplexer ... $Call
Disk Server ... $Call

DAVONG
5 MB $Call
10 MB $1750
20 MB $2595

XCOMP — Adaptor for KAYPRO
10 MB $1895 — II & Morrow MDI
16 MB $2099 — & MO2

DOT MATRIX PRINTERS

EPSON
RX-80 ... $379
MX-80FT III ... $459
MX-100FT III (Graftrax) ... $649
FX-80FT ... $535

STAR MICRONICS
Gemini 10/10X ... $299/319
Gemini 15/15X ... $469/479

OKIDATA
Microline 92 ... $499
Microline 93 ... $859
Microline 84 Parallel ... $995

C-ITOH
Prowriter I ... $379
Prowriter II ... $659
Prowriter 8600 BP ... $1025

MANNESMANN TALLY
MT 160L (160 CPS) ... $689
MT 180L (15 inch) ... $899

LETTER-QUALITY PRINTERS

C-ITOH
F-10 Starwriter ... $1249
F-10 Printmaster ... $1589

COMREX
Comwriter I Para/Ser ... $799
Comwriter II Parallel ... $499
Comwriter II Ser (3K) ... $599

DAISYWRITER
2000 EXP (48K Buffer) ... $1049

JUKI (17 CPS 15 inch) ... $570

SILVER-REED
Exp 550P ... $689 — Exp 550S ... $789
Exp 500P ... $469 — Exp 500S ... $499

QUME SPRINT II/40 ... $1345

MONITORS



AMDEK
300G (12" green) ... $149
300A (12" amber) ... $159
Color I (Composite) ... $289
Color III (RGB) ... $359

COMREX
CR5600G ... $145
CR5600Y (Yellow amber) ... $155
CR5600A (Amber) ... $159

GENTECH
GT-09G (9" green) ... $100
GT-09A (9" amber) ... $115
GT-12G (12" green) ... $115
GT-12A (12" amber) ... $119

TAXAN
RGB Vision I (with Apple II + Cable & Interface) ... $275
RGB Vision II ... $345
KG-12N (12" green) ... $519
KG-12N-UY (12" amber) ... $125
... $135

QUADRAM
Quadchrome RGG for IBM ... $489

TERMINALS

Freedom 100 (11 F1N Key green) ... $490
Visual 50 Detachable KYBD ... $589
Televideo 910 + ... $565
Televideo 925 ... $725
Televideo 950 ... $945

MODEMS

HAYES
Micromodem II ... $275
Smartmodem (300 BAUD) ... $210
Smartmodem (1200 BAUD) ... $509
Smartmodem 1200B for IBM ... $468
Smartcom II (Terminal Prog) ... $99

NOVATION
CAT 300 BAUD Acoustic ... $144
Q-Cat 300 BAUD Direct ... $155
J-Cat 300 Small Size ... $109
Apple Cat II ... $269
103 Smart Cat ... $179
103/212 Smart Cat ... $429

SSM
300 BAUD Modem Card ... $239
1200 BAUD External Modem ... $529
Transand 1/2/3 ... $69/$109/$209

SOFTWARE

FOR IBM PC
BDS A/R A/P G/L I/C O/E ... $300
Any three ... $975

FOR DEC RAINBOW AND APPLE III
PEATREE G/L A/R A/P I/C Payroll ... $499

```
Scripsit® is produced by Radio Shack to run on TRS80 computers.
In addition to normal size characters, printer controls
can be set to print condensed characters, porportional spaced characters, normal
elongated characters, elongated condensed
characters, and proportional elongated characters.

of course there may be other printer functions you wish to call on,
including:

                H2Ø  X⁴+Y²=2Ø
```

Figure 3. Actual printed version of text.

"• The driver remains unnotified if and when the pitch is changed within a document, and so margins and tabs must be adjusted accordingly.

"• The LP VI is not cooperative about accepting anything other than single-spaced lines through the Open Document



Panasonic Model KX-P1160 shown with optional front inserter.

Options. However, if you consider that you can select 6, 8, or 12 lpi through user-programmed keys and select single-, double-, or triple-spacing via a block action, it offers considerable flexibility.

"• With the LP VI *SuperScripsit* counts whole lines at 6 lpi, so it may be necessary to adjust page specifications if the printer is set to 8 or 12 lpi. Bear in mind that the program allows a maximum of 99 lines per page. For that reason you should not use the narrower line spacing unless it is absolutely necessary.

"I do agree with Mr. Byrne that the LP VI is a sturdy, versatile printer. It simply requires a bit of creativity to make full use of its capability. With careful work at 12 lpi, it will even underline. The only things I have not been able to get it to do easily are those functions which normally require a reverse paper feed (such as subscripts and superscripts)."

In another letter J. Spence of Denton, TX, posits that Mr. Byrne was using an older version of the program. Spence is now using an LP VIII and Daisy Wheel II, but wrote his own program two years ago to get around the control code problems.

The control codes he is now using appear as Figure 1, the CRT version as Figure 2, and the printed results as Figure 3. Hope this helps some of you *Scripsit* users out there.

New Hardware

Two new dot matrix printers are on the way from Panasonic. The KX-P1160 can reach 165 cps in pica, 196 cps in elite. It can handle 15" paper, in fanfold or single sheet. An optional front inserter is available to friction feed single sheets to the printer.

The printer comes with a parallel interface standard. An RS-232 serial interface is available as an option. This model lists for $1750.

The model KX-P1090 can handle paper widths up to 10" and reach speeds up to



Panasonic Model KX-P1090.

96 cps. It also features sprocket or friction feed. The suggested retail for the unit is $550.

Both printers use a seamless cartridge ribbon. For more information contact Panasonic, One Panasonic Way, Secaucus, NJ 07094, (201) 348-7183.

Smith-Corona is following its original TP-1 with the TP-II daisy wheel printer. The SCM TP-II features both serial and parallel ports, selectable 10 or 12 pitch character sets, self-test switch, and new printwheels with program characters. This simplifies printing Basic listings.



SCM TPII.

The TP-II incorporates several enhancements to its predecessor. Baud and parity DIPs are easier to set. Reversing polarity of the busy signal has been simplified, as have controlling linefeeds and carriage returns. An optional tractor feed feature has also been introduced to allow use of continuous form paper.

The list price of the unit is $900. For more information, contact Smith-Corona, 65 Locust Ave., New Canaan, CT 06840. (203) 972-1471.

Tandy has released a new $500 dot matrix printer capable of printing at 120 cps. The DMP-120 is code-compatible with all other Radio Shack printers, with the exception of some word processing codes (such as parts of *SuperScripsit).*

The graphics mode of the unit allows creation of almost any graphics con-



Radio Shack DMP-120.

PKASO™
Printer Interface Family

and Apple //e...
We work together

PKASO Interfaces come complete with Cable, Instructional Diskette and Comprehensive Manual

The PKASO family makes you and your Apple Computer a master of text and graphics.

PKASO makes it easy to use the features of your printer—select character sizes, vary line spacing, even print in colors. Simple PKASO commands make these features usable from the keyboard or a program.

PKASO also adds features to your system. Press a few keys and get a snapshot "dump" of the image you see on the screen—text or graphics. Add new characters and symbols that you couldn't print before, using our SuperFont™ system. Add our new PipeLine™ printing buffer and your printer can take its time while you and your Apple move on to the next task. The PipeLine is a modular add-on to the standard PKASO board.

The PKASO Interface is designed for Apple II and Apple /// in all the popular configurations. It prints in full color on the IDS Prism Printer, and in striking black on C Itoh, Centronics, Epson, IDS, NEC, and Okidata matrix printers.

IS PipeLine™
PRINTING BUFFER

For Apple, IBM, TRS-80 and most leading personal computers.

NOW with **serial** as well as **parallel** output and **Random Access Processing** (pat. pending)

IS

Interactive Structures Inc.
146 Montgomery Avenue
Bala Cynwyd, PA 19004
Telephone: (215) 667-1713

Printers, continued...

```
 '"#$%&'()*+,-./0123456789:;<=>?@ABCDEFGHIJKLMNOPQRSTUVWXYZ[\]^_'abcd
 pqrstuvwxyz{|}^Øß'  ''$┌┐┤┼└┘┴┬'"#$%&'()*+,-./0123456789:;<=>?@ABCDE
 QRSTUVWXYZ[\]^_'abcdefghijklmnopqrstuvwxyz{|}^Ø_▁▂▃▄▅▆▇▉▊▋▌▍▎▏▐▔▕▖▗▘▙▚▛▜▝▞▟♠♥♦♣
```

Spirit-80 print sample.

figuration needed. For more information, contact Tandy/Radio Shack, One Tandy Center, Fort Worth, TX 76102. (817) 390-3300.

Transtar has released its own model 120, but this, in contrast is a $600 daisy wheel printer. The unit provides letter quality print at 16 cps. With an automatic

Transtar 120.

paper loading system, cut sheets can be positioned with the touch of a button. Tractor feed is available optionally. The unit has a Centronics parallel interface.

For more information contact Transtar, Box C-96975, Bellevue, WA 98009. (206) 454-9250.

That's the Spirit

The Spirit-80 is the latest entry from Mannesmann Tally, the people who brought you the MT-160 printer (given a rave review in the June 1983 issue). The Spirit-80 is their low-end entry, with a list price of $399 with standard Centronics parallel interface.

While it is not in the same class as the MT-160, it is much less expensive and has many features of more expensive machines. Compared with other machines in its price range, the Spirit-80 looks very good indeed.

At a printhead speed of 80 cps, the unit is capable of multiple fonts in extended, normal, and compressed modes, including italics. In compressed mode, up to 142 columns are available. The unit can handle superscripts and subscripts, and has a graphics mode offering resolution of 640 dots per line.

The printer can accept continuous form or single sheet friction feed. Up to three carbon thicknesses can be supported. Mannesmann claims a mean time between failures of over 5 million lines (excluding printhead life). The printhead is rated at approximately 30 million characters.

A large part of the speed of a printer can be judged by the linefeed speed. The linefeed time of the Spirit-80 is approximately 0.02 seconds—very quick for a $400 machine.

No graphics duty cycle is imposed, but guidelines are provided within the documentation so that a user can create duty cycles for his own use. Under normal conditions, however, none are necessary.



Mannesmann Tally Spirit-80.

A REPORTING SYSTEM FOR A SPREADSHEET DATABASE
(for any VisiCalc© or Lotus 1-2-3™ User)

Most database systems consider rows of data fields as records. The 3-D concept promoted by Abacus says to consider an entire report as a record. Therefore, visualize "pages" of reports stacked-on or scattered-around your desk; these would constitute your database.

VIZ-A-MERGE™

With Viz-A-Merge (Namely-A-Merge System) you can "cut and paste" sections of spreadsheet reports together to form new reports - - - Electronically!!! As a spreadsheet utility Viz-A-Merge allows you to combine sections, rows, columns, or single cells from any number of spreadsheet pages into one new report, or into an existing report, then recalculate selected formulas. For example, you could "cut" total year end columns from Department reports and the consolidated reports, then "paste" them together for overall company analysis. Or, you could place a total sales row into an income statement and recalculate all formulas.

VIZ-A-CON™

With Viz-A-Con (Namely-A-Consolidation System) you can add 3-Dimensional capability to your spreadsheet program. As a Report Writer to your database, Viz-A-Con allows you to select records ("pages"), get sub-totals and totals for all number fields, and have customized labels on the final report. For example you can perform hierarchical consolidations (Dept., Div., Company) or time period roll-up (Day, Week, Month, Qtr., Year). You can consolidate up to 50 files in one process and you can tie together as many as 80 processes in one group. Then play "what if" with VisiCalc and regenerate all reports in one single step.

Each Product has a simple Question & Answer procedure to assist you in organizing your report processes. You can create a complete reporting network from a spreadsheet database. They have the ability to "remember" the steps they went through to create the final reports. You can use your spreadsheet program to recalculate new data, then use our products to regenerate all new reports in one single step. Also, you can set-up special formulas to calculate additional data fields within the new reports. You can customize titles, row and column headings, footnotes, etc. for each report.

Both products include sample sessions which are easy to understand, allowing the average person to learn them in only 15 minutes. They are both compatible with dBase II™ (IBM), PFS Graph® and a host of popular products.

Abacus Associates is dedicated to producting products that allow users to create customized reporting systems tailored to the way they manually organize their data.

Please order either Viz-A-Merge or Viz-A-Con directly from Abacus Associates. Send your check or money order to Abacus Associates, 6565 W. Loop South, Suite 240, Bellaire, TX 77401, or credit card customers may CALL TOLL FREE (800) 547-5995, ext. 170. In Nebraska, (800) 642-9606, ext.170.

Apple II, II+, IIe, TRS-80 I, III, IV ..... $ 99.95
Apple III, TRS-80 II/12/16, IBM-PC $139.95
Add $3.95 S & H per package.

Look for forthcoming 3-D application templates

VISA MasterCard

When it comes to superior performance, we study our lines very carefully.

Superior printer performance is not a fluke. It evolves from analyzing printed line after printed line. Taking the time to test and retest. After 30 years of manufacturing precision parts, we know that there are no shortcuts.

And so we took the Gemini-10X and methodically put it through its 120 cps pace. We achieved a print head life of over 100 million characters with an extremely precise dot alignment creating each crisp character.

So far so good.

Next, sophisticated performance demanded versatility. A wide choice of character sets, a buffer expandable to 8K, and the ability to interface with all popular personal computers. We added macro instruction, giving Gemini-10X the capability to perform up to 16 operations with one command. We included as standard a paper feed system that has a friction and fully adjustable tractor feed. Then we even built in the dexterity to print graphics and text on the same line.

Done.

And, of course, staying the best means constant reviewing and fine-tuning. Keeping the Gemini easy to find, easy to afford and so reliable it can be warranted for up to twice as long as its major competitors.

Only the most careful engineering has built the new hard-working Gemini-10X. You'll applaud its performance.

star™ micronics·inc

THE POWER BEHIND THE PRINTED WORD.

Computer Peripherals Division
2803 N.W. 12th Street, Dallas/Ft. Worth Airport, TX 75261

CIRCLE 251 ON READER SERVICE CARD

Printers, continued...

The documentation itself is much less impressive than that accompanying the model MT160, with less organization, more typographical errors and ambiguities. At one point the Spirit-80 is described as a serial-type printer, because the matrix printhead impacts the paper in a serial fashion. Jeepers creepers. People who have just bought a parallel printer may be a bit startled upon reaching that point of the documentation.

I have had the Spirit-80 in heavy use for about three days now, and have been very satisfied with its performance. The type quality is very good (see sample) and the paper feed is exceptional. A white wire paper guide keeps incoming and outgoing paper from ever crossing paths. And unlike most printers you will encounter, the tractors engage *before* the paper goes around the platen. This may seem like a trivial consideration, but I am convinced it helps lessen the potential for jamming when wrinkled or torn paper feeds through. It is a design feature well worth imitating.

The unit has a relatively heavy clear plastic cover, which helps lessen noise. I have seen printers at three times the price with much flimsier covers. Another classy move from Tally.

Overall, the noise during operation is quite tolerable. It is no ink-jet, but you don't need to turn it off to talk on the phone.

The large buttons on the top front of the Spirit-80 select and deselect on-line operation, as well as line and form feeds. LEDs indicate on-line, ready, and "paper out" conditions. There is a "paper out" buzzer, that can be deselected as a DIP switch setting.

Top of form is set at whatever point the printer is turned on. To reset it, turn the printer off, advance the paper to the top of form, then turn the printer back on.

The cartridge ribbon is very easy to replace, and an extra cartridge is supplied along with the unit.

The Spirit-80 is another strong entry from Mannesmann Tally, and helps to round out its microcomputer product line. It is also quite a handsome machine—one of the best-looking new printers around.

For more information contact Mannesmann Tally Corporation, 8301 South 180th St., Kent, WA 98032. (206) 251-5500.

Delectable Dumpling

If you own an Apple and have been following our discussion of print buffers, make a note to learn more about a company called Microtek. We have been using their Dumpling-64 card in one of our Apples for months now, and it has faithfully performed as a parallel interface

Microtek Apple Dumpling-64.

card, graphics printer card, and 64K buffer—a versatile product, to say the least.

If you already have or do not desire the buffer aspect of the Dumpling-64, you can buy the Dumpling-GX, which has all the interface features of the spooler, minus the spool. The card can drive any 8-bit parallel printer.

For more information contact Microtek, Inc., 9514 Chesapeake Dr., San Diego, CA 92123. (619) 569-0900.

Until next time, keep your ribbon inked, and may all your perforations be little ones. □

The MICROWRITER™ Daisy Wheel Printer.

Price $680

Features:
● Microwriter parallel interface mounted internally in the Olivetti Praxis machine ● Built in self test ● Portable...comes with deluxe carry case ● Low noise level ● Slim modern styling ● Print quality is identical to the finest office typewriters on the market ● Can tab ● Rule single lines both vertically and horizontally ● Underline ● Print at 10, 12, or 15 characters per inch (switch selectable) ● Ten character memory automatic error correction, with lift-off carbon film correction ribbon (for typewriter use) ● Automatic or programmable page formats ● Handles letter, legal size sheet and fanfold paper in widths up to 12 inches wide ● 165 character/12 inch print width ● Wide selection of 21 interchangeable daisy print wheels available ● Ribbon cassettes just drop in ● Switch selectable European keyboard ● Centronics compatible parallel cables are currently available from stock

With the Microwriter you will never again have to send an important letter or a simple correspondence that doesn't look impressive. Why settle for just any printer when you can have a MICROWRITER™ a fine letter quality typewriter for you and your computer. For more information, see your local computer dealer or contact Ammicro directly.

ammicro™ corp
122 East 42 Street, Suite 1700, New York, N.Y. 10168
(212) 254-3030

CIRCLE 113 ON READER SERVICE CARD

THE PERSONAL PRINTER BUILT LIKE A SHERMAN TANK

PERFORMS LIKE A CONCERT GRAND.

Why We Get Encores. Okidata takes center stage with a cast of printers that can't be outperformed. All eight dot matrix printers offer you more features for your money than you can find anywhere else. Pick your tempo: data processing at speeds from 80 to an exceptional 350 cps; to stress a point, enhanced and emphasized printing at up to 100 cps; outstanding letter quality printing at speeds three times faster than most daisywheels — up to 85 cps. Add a full range of graphics capabilities, downline loadable character sets for creating personalized typefaces and symbols, and your print repertoire is virtually unlimited.

We Play On and On. Our virtuosos feature rugged steel frames, laser-welded parts, and our long-life, non-ballistic print head warranted for up to one full year. With this tank-toughness you'd expect Okidata to have the lowest warranty claim rate in the industry. And we do: less than ½%.

In Tune with All Major Computers. We've designed each of these finely tuned instruments to be harmonious with all the major names in personal computers. And to give you more than you'd get from the major computer name printers. After all, we specialize in printers. The computer folks specialize in computers. (That's why MOST buy their printers from somebody else).

Larger Selection. Smaller Prices. Because we make more printers than anybody else, we can give you just the right one to fit your specific needs. Not to mention your budget. Suggested retail prices range from $449 to $2995. Call 1-800-OKIDATA (in NJ, 609-235-2600) for the dealer nearest you. Both you and your computer will enjoy the performance.

OKIDATA
Mt Laurel NJ 08054

A subsidiary of Oki Electric Industry Company Ltd

CIRCLE 165 ON READER SERVICE CARD

ari...outpost atari...out

Hey there folks, and welcome to the Outpost. The talk here concerns Atari, and we're pretty serious about the hobby. We have no qualms with the statement that the Atari microcomputer is absolutely the best machine in its class. So rather than spend a lot of time welcoming you here or beating around the bush, let's get right down to business.

First off, you'll notice that the machine at the top of our masthead has been changed. It is no longer our trusty Atari 800, but the flagship of the brand new Atari line, the 1450 XLD.

Author Author

You know it has never escaped us that many of the real contributions to the Outpost, and to all Atari-specific publications everywhere, come from you, the "everyday" Atari user. Your interest, individually and through user's groups, sustains columns like this one. A good example will follow shortly.

In that spirit it is our pleasure to reissue a call for manuscripts. We have begun work on *The Creative Atari II*, and are actively soliciting new material to appear within its pages. If you have an application for your Atari that other Atari owners should know about, for goodness sake, send it in. Make sure it is typed and double-spaced. If you are including a program listing, send a cassette or disk (disks preferred) along too.

Just imagine: to be immortalized within the pages of *The Creative Atari II*.

John J. Anderson

What glory! What privilege! And we'll pay you, too.

And if your application is truly outstanding, you might see it right here in the Outpost as well.

So get to work. Our address is 39 East Hanover Ave., Morris Plains, NJ 07950. Send your material to *The Creative Atari*, and if you wish it returned, enclose a correctly sized, self-addressed, stamped envelope.

Book Beat

The Creative Atari Vol. I, by the way, has been on the stands for a few months now. Along with *all* the Atari material that has appeared in *Creative Computing* up through March 1983, it includes new material, never seen before. It is definitely worth checking out.

Other new Atari books worth a mention are the following:

I Speak Basic to My Atari, by Aubrey Jones, Jr. 229 pp., teacher's edition, 244 pp., Hayden Books, Rochelle Park, N J. A computer literacy course focusing on the Atari computer. Good Basic tutorial for kids seventh grade and above, including sections on the disk drive and how to do simple graphics. Chock full of exercises and quizzes. I can see this text becoming a favorite at Atari computer camps. The teacher's manual provides many valuable ideas and is accompanied by exam masters that you can reproduce.

Programming Your Atari Computer, by Mark Thompson. 272 pp., TAB Books, Blue Ridge Summit, PA 17214. One of those tailored how-to type manuals like Chilton's auto guides, using generalized information for early chapters, then moving to machine-specific information. Doesn't get to the meaty Atari information until chapter six. Still, you might want to have it as a back-up reference. And in all fairness, early chapters on binary numbers, computing principles, and Boolean algebra are worthwhile, though not Atari-specific.

User's Handbook to the Atari 400/800 Computers, by Jeffrey Weber and Stephen Szczecinski. 319 pp., Weber Systems Inc., 8437 Mayfield Rd., Cleveland, OH 44026. Takes you all the way from installation of the machine through graphics and sound. Nice coverage on some of the ins and outs of Atari Basic. Includes chapters detailing use of the 410 cassette recorder, 810 disk drive, and first generation Atari printers. Some worthwhile programs. Numerous appendices.

For more Atari reference sources, see the May 1983 and December 1982 Outpost columns.

While we are on the topic of books, allow me to redress a *faux pas* (the first of two to be set right this month). In the August column, I cited the Alfred book *Understanding Atari Graphics* without crediting its author, Michael Boom.

ATARI COMPUTER OWNERS:

Pick the positively perfect, practical, printer-port peripheral package, from PERCOM DATA!

That's right — the positively perfect PERCOM DATA 5¼" floppy disk drive with a BUILT-IN PRINTER-PORT, for your Atari® 400/800 is now available!

Until now, Atari computer owners who wanted to hook a printer to their computer had only one choice — spend about $220 for an interface device. THOSE DAYS ARE OVER. PERCOM DATA has built a parallel printer-port right into its new AT88 PD model. Now you can add a quality disk drive system AND have a place to plug in a printer — WITHOUT BUYING an interface.

The AT88 S1 PD™ disk drive operates in both single density (88K bytes formatted) and double density (176K bytes formatted).

What more could you want? NO INTERFACE — a high quality PERCOM DATA disk drive — AND a built-in PRINTER-PORT — all with a price of $599.

Pick up a positively perfect PERCOM DATA disk drive with printer-port — pronto!

For the name of an authorized PERCOM DATA Dealer near you, call our **TOLL-FREE HOTLINE 1-800-527-1222 NOW,** or write for more information.

Perfectly Priced

$599.

PERCOM DATA
CORPORATION

Expanding Your Peripheral Vision

DRIVES • NETWORKS • SOFTWARE

11220 Pagemill Road, Dallas, Texas 75243 (214) 340-4900
1-800-527-1222

Atari is a registered trademark of Atari, Inc. • AT88 S1 PD is a trademark of Percom Data Corporation • COPYRIGHT PERCOM DATA CORPORATION 1985
Prices and specifications subject to change without notice.

CIRCLE 268 ON READER SERVICE CARD

Outpost: Atari, continued...

Whoops—sorry, Michael. Merely an oversight on my part. It is a fine effort.

Before we switch topics—a periodical index for the Atari computer has been published. Called Soft Finder 1.1, it comprises a two-year composite index of Atari-related articles in *Creative Computing, Analog, Antic, Compute,* and the Eugene *ORACE* Newsletter. Plans are to release new issues quarterly. Cost is $6 an issue. For more information, contact Valley Soft, 2660 S.W. DeArmond, Corvallis, OR 97333.

Also, note that the correct address for ordering back issues of *Creative* is the New Jersey address listed above, not Boulder, CO, as stated in Soft Finder.

Show And Ataritel

We shall very shortly see the first products resulting from the formation of *Ataritel*. If you have not heard that name before, suffice it to say that it shall constitute Atari's foray into the telecommunications market. Atari hopes to ease the way for the consumer by marketing inexpensive and easy-to-use telecommunications products.

For quite a while now Atari has refused to disclose a thing about any Ataritel products on the drawing board. One can only hope that the products will be something more than an autodial phone or modem unit in the shape of E.T.

What kinds of products might they truly offer?

Well. Imagine for a moment a machine along the following line. When the phone rings, it automatically picks up (it has a telephone built-in). It determines whether the incoming call is from a human or another computer, by listening for a carrier tone. If the call is from a human, the Votrax chip within the unit asks the caller to hold on, while it summons you. If you are not available, it says so, and offers to store a message. If the call is from another computer (requires a telecommunications connection), the unit automatically provides its own carrier, and hooks to its terminal program (it has a computer built-in, too).

This same computer can place telecommunications calls for you at preselected times you specify. Hooked to your home television, it provides interactive videotex. Through this system you can access an almost unlimited quantity of information. It can, of course, dial into Compuserve, The Source, campus mainframes, or individual bulletin board services. It will autodial all of your normal voice connection calls as well.

It may also be tied into your home security system, monitoring the place, and automatically dialing the police if it finds anything too strange going on.

Is something like this superphone one of the products upcoming from Ataritel? Only time will tell.

Farewell 400

Right now the Atari 400 is just about the best buy in microcomputers: I saw a price of $70 (after rebate) the other day. Of course the reason prices are this low now is to make room for the new models.

The Atari 400 and 800 are now a part of history. But they are a memorable part. So long fellas; we'll remember you. I'm sure that tens of thousands of you will still be computing ten years from now. If you still don't have an Atari, and you have $70, and you can find one, my advice is to shell out for an Atari 400 without delay. How can you resist? And you may get the *very* last one!

Third-Party Thingies

Have you heard about *XBasic*, from

16 Colorful reasons to get doublestuff™

actual doublestuff™ reproduction

LO-RES

DOUBLE LO-RES CONDENSED

DOUBLE LO-RES

Software Development Inc. now offers you something that Apple never told you was possible in the IIe. It's called DOUBLESTUFF.™

Using standard Applesoft BASIC commands, in combination with your existing programs, you can expand your color graphics from 16 color Lo-Res (40 × 48) to double Lo-Res (80 × 48).

Unheard of before! Available NOW! With BASIC commands. Double Hi-Res 16 colors (560 x 192 pixels) is *all* yours on your Apple IIe. It literally doubles the width on your standard color TV or monitor.

Requirements: Apple IIe—either 80 column card for double Lo-Resolution. Extended 80 column card for double Hi-Resolution.

NEW Products available November '83: doublestuff™ designer,™ my first coloring book.™

Software DEVELOPMENT INC

Apple and Apple logo are trademarks of Apple Computer Inc
Doublestuff™ is a trademark of Software Development Inc

doublestuff™

designed by: Louis Bonfiglio and Peter Joselow

To order, send check or money order in the amount of $39.95
New York State residents, add sales tax to

Software Development Inc.
2053 West 11th Street
Brooklyn, NY 11223 Tel. (212) 449-6300
Dealer inquiries invited.

CIRCLE 236 ON READER SERVICE CARD

WE INTERRUPT THIS AD TO BRING YOU THIS IMPORTANT PROGRAM...

Now you could add **your** program to the rapidly expanding list of MMG Software with MMG's **Write Your Own Program Contest!** Each month a program will be chosen and developed from the entries and suggestions sent in by **you** and best of all, the winners will receive royalties from the sale of their entry. You don't have to be a computer whiz to enter, so see your local retailer who carries ATARI products for details. FINAL FLIGHT is only one of the many exciting and useful programs for the ATARI system now available from MMG Micro Software that are designed with you in mind. At MMG, we believe that people are as important as the programs they use.

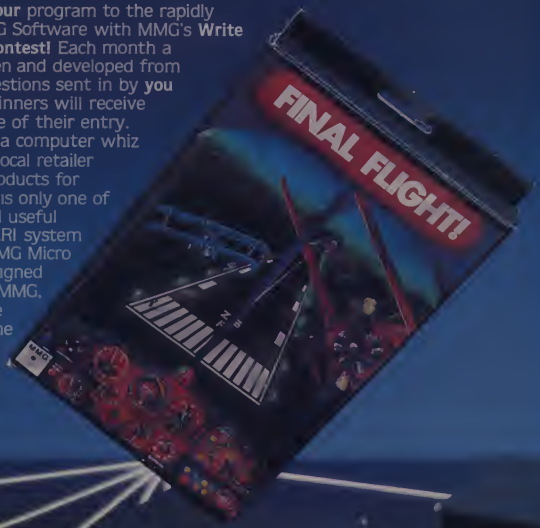

MMG
micro software
P.O. Box 131 Marlboro, NJ 07746
(201) 431-3472

CIRCLE 191 ON READER SERVICE CARD

SADO-193

Superware? It is a 2K machine language program that adds several interesting features to Atari Basic. Among them is the capability to construct string arrays, just as in Microsoft Basic. Using a USR call you may define up to eight simultaneous string arrays. Other commands simplify sound and graphics commands, along with a few other neat capabilities.

As opposed to some other enhancements to Atari Basic, Superware allows XBasic to be freely included in user-developed software for sale, as long as the XBasic program source code is inserted along with a credit screen. For more information contact Superware, 2028 Kingshouse Rd., Silver Spring, MD 20904.

Adventure International has released a package called *Ultra Disassembler*, which makes a good go at reconstructing Atari source code from machine language. Not only can you read code from memory, but you can disassemble DOS files, even specific disk sectors, without regard to pointers or file structure. Disassembled code can be reassembled with any Atari assembler.

For more information contact Adventure International, Box 3435, Longwood, FI. 32750.

If you have a CP/M system at home as well as an Atari, you may be interested in the Critical Connection, a hardware/software interface that allows your Atari to use the keyboard, drives, and printer of any CP/M computer with a 19,200 baud serial port. The original interface product has been improved to make installation to popular CP/M machines more simple. For information contact USS Enterprises, 6708 Landerwood Lane, San Jose, CA 95120.

Looking for a 3-D scrolling game with some real staying power? Try *Blue Max* from Synapse on for size. In it you are a World War I flying ace on a mission deep in enemy territory. The graphics are superlative, and the game is very hard to master.

As you fly northeast, the terrain scrolls by below you. Your job is to knock out selected bridges, ammo dumps, and enemy enclaves. You will be under constant attack, however, by enemy planes and ac-ac guns.

It takes a while to learn to pilot your biplane, and you will get used to crashing really quickly. You only get one plane per game, so stay near the START key.

After a few hours of practice, you may begin to get the hang of steering, bombing, strafing, refueling, and dodging enemy fire. If arcade-style shoot-'em-ups are your thing, *Blue Max* is a must.

With products like *Blue Max*, Synapse remains among the pre-eminent action game houses for the Atari. Their latest release, *Dimension X*, features an absolutely mind-boggling effect called "altered perspective scrolling." As your craft moves low over surface terrain, the ground scrolls by in perspective. It is simply the most impressive three-dimensional graphics effect since *Star Raiders*.

Because it was demonstrated for some time before release at CES and other shows, some critics have labeled it "an effect in search of a game," and admittedly the action itself is very reminiscent of *Raiders*. But the effect is smashing. If anybody works up a snippet of code, in assembly or Basic, that approximates the scrolling effect, we will print it here.

Dander's Up

There I go about graphics again—I had better watch myself. You can't be a serious educator and be simultaneously serious about quality microcomputer graphics, you know. Or so some people might have you think. Take a quick look at the I/O section of this issue for an example. The charges upset me.

Regular readers of this column will know that I abhore "fluffware" as much as the next person. It's just that I abhore *swillware* more. That is all I meant to say in the July column (and that is all I did say). I did not indict software minus graphics—some of my favorite programs are all text. I did not try to present Trip Hawkins as a role-model for all educational software makers—just as an original and pace-setting figure in the industry.

Blue Max.

Faux Pas Numero Deux

Told you I'd be apologizing again. A.J. Sekel of Atari called the other day to set me straight on a claim I had made in the August Outpost and in the latest installment of the *Buyer's Guide*. My statement was that the new crop of Atari computers had returned to the old operating system of the 400 and 800. What I should have said was that they returned to a *compatible* operating system with the old machines.

According to Mr. Sekel, the new machines incorporate a redesign of the model 1200 OS, which was originally incompatible with much 400 and 800 software. Such is no longer the case. Certainly I did not mean to imply that the new 64K machines employed a 48K operating system: that would be quite tough. The wording was wrong. My booboo. Sorry, guys. When you're right, you're right, and I'll say so.

Stonewall Bartlett

Of course when you're wrong, you're wrong. This one made me chuckle. James Rose, of Long Beach, CA, is one of the faithful Atari fans that took mighty pen in hand in the letter-writing campaign to help kill the 1200. He got a delayed but interesting response, and took the time to share it with me. It is signed by a Mr. William Bartlett, Manager, Product Support. In part it read:

"The article you refer to from *Creative Computing* was misleading in several ways. The 1200XL will not be redesigned. There will not be a return to the 400/800 operating system. There will not be an expansion chassis feature available. The 1200 will continue to be sold in its original configuration."

Ooh, shame shame, Mr. Bartlett. I

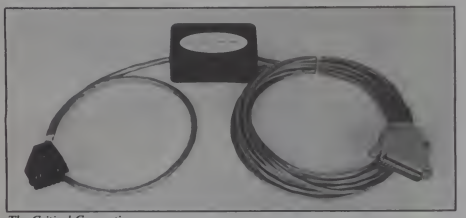

The Critical Connection.

may have made a misstatement, but *you* are the one who was misleading. Don't believe a word of it, Mr. Rose. Fact is if you and other Atari loyalists had not made the effort, there would have been no return to compatibility or expansion capability in the new machines, and Mr. Bartlett's statement would be true. The Atari 1200 would not have been discontinued. And Atari computers would probably have disappeared entirely by now.

Stringing Along

I had a nice talk with Charles Zubieta yesterday, who is a 16-year-old Atari tyro from La Jolla, CA. Using his 16K 400 with cassette drive, he has managed to turn out two really nice scrolling demos. Nice enough to give him the guest tutorial spot this month.

Ever since the days when the legendary George Blank was manning the Outpost, the technique of storing graphics data in strings has been discussed. George showed how players could be saved as strings, and then changed on the fly. The method is simple and fast.

Well young Mr. Zubieta has taken things a bit further, and gotten some good results in just a few program lines (and that's the way I like to see, and type, listings).

The best thing I can do at this point is turn over the proceedings and let Charles take it from here. If you have questions, please correspond directly with him. He can be reached at 6477 Caminito Baltusral, La Jolla, CA 92037.

Take it away, Charles.

* * *

Being a programmer can be a very frustrating experience, especially if you only know Basic. More than once I have started a game program, then had to abandon it simply because it was too slow. I have tried all the tricks. Very few of them had a significant effect on the speed of my program—until now.

One dull evening I was experimenting with player missile graphics using strings. By making the operating system treat the player missile area as a string, it is possible to achieve high speed animation and vertical movement.

Taking it further, instead of making the operating system think the player missile area was a string, I made it think that the screen RAM was a string. Little did I know what I had stumbled upon. I had gained the ability to control every single byte of screen memory at machine language speed, without all the hassle.

As I continued to experiment, some possibilities began to come to mind. By the time the sun was coming up, I had tested most of them. Here is a list of some of the possibilities:

- Multiscreen playfield.
- Vertical scrolling.
- Horizontal scrolling.
- Mixed scrolling.
- Automatic screen save in the blink of an eye.
- Super fast text handling on the screen.
- Super fast animation with as many objects as you want.
- High-resolution drawings done in the blink of an eye.
- Full compatibility with screen editor.

I couldn't believe it. I was able to do all these things in Basic, without any machine language subroutines. This list by no means exhausts the possibilities of

Program 1. Horizontal coarse scroll.

```
1 REM ** MIXED SCROLLING ROUTINE **
4 REM **   BY CHARLES ZUBIETA    **
5 REM
6 REM
7 REM
8 REM
9 REM DIMENSION A$
10 DIM A$(960):REM DIMENSION STRING
19 REM FIND VARIABLE TABLE
20 VTABLE=PEEK(134)+256*PEEK(135)
29 REM FIND SCREEN MEMORY
30 SCREENRAM=PEEK(88)+256*PEEK(89)
39 REM FIGURE OFFSET
40 OFFSET=SCREENRAM-ADR(A$)
49 REM FIGURE POINTERS TO FOR A$
50 V3=INT(OFFSET/256)
60 V2=OFFSET-256*V3
69 REM ASSIGN POINTERS
70 POKE VTABLE+2,V2
80 POKE VTABLE+3,V3
100 SETCOLOR 2,0,0:SETCOLOR 1,0,15:SETCOLOR 4,8,4
110 REM MAIN PROGRAM
119 REM DIMENSION SCROLLING STRING
120 DIM MESSAGE$(1000)
130 MESSAGE$="the message now being scrolled is written in lower case
    because the internal character set is"
140 MESSAGE$(LEN(MESSAGE$)+1)="compatible with atascii only in the low
    er case this message is being scrolle"
150 MESSAGE$(LEN(MESSAGE$)+1)="d by making the operating system think
    the screen is string storage area"
160 MESSAGE$(LEN(MESSAGE$)+1)=MESSAGE$(1,40)
170 ? "{":POKE 752,1
200 POSITION 0,1:? "    Mixed Scrolling Example Program"
202 POSITION 0,20:? "       Written By Charles Zubieta"
203 REM * LOOP THAT CONTROLS SCROLL *
205 PI=1:NI=LEN(MESSAGE$)-40
210 A$(121)=MESSAGE$(PI,PI+39)
220 A$(201)=MESSAGE$(NI,NI+39)
221 A$(201)=MESSAGE$(PI,PI+39)
222 A$(361)=MESSAGE$(NI,NI+39)
223 A$(441)=MESSAGE$(PI,PI+39)
224 A$(521)=MESSAGE$(NI,NI+39)
225 A$(601)=MESSAGE$(PI,PI+39)
226 A$(681)=MESSAGE$(NI,NI+39)
300 TRAP 205:PI=PI+1:NI=NI-1
500 GOTO 210
```

800 48K $199.00*

* after $100. rebate from ATARI cash price $299.

810 Disk Drive.....$369.00

* Includes free programmer package

Educator.....$109.75
Programmer.....$ 51.75
Entertainer.....$ 63.75
Bookeeper.....$164.75

800XL $$$$$149.00
800 XL.. $CALL$
1200 XL. $499.00
1400 XL . $CALL$
1450 XL . $CALL$
1025 Printer.....$399.00
1020 Color Printer . $245.00
1027 Printer.....$299.00
1010 Recorder.....$75.00
410 Recorder.....$75.00
610 Disk Drive.....$399.00
1050 Disk Drive....$335.00
850 Interface.....$CALL$

PARKER BROTHERS

Tutankham R.....$33.75
Super Cobra R.....$33.75
Astro Chase R.....$33.75
Frogger R.....$33.75
Obert R.....$33.75
Popeye R.....$33.75
Risk R.....$42.75
Chess R.....$42.75

SPINNAKER

Story Machine R.....$26.75
Face Maker R.....$24.75
Kindercomp R.....$20.75
Fraction Fever R.....$24.75
Delta Drawing R.....$26.75

SSI

Battle of Shilo C/D.....$26.75
Tigers in the Snow C/D....$26.75
Battle for Normandy C/D..$26.75
Knights of the Desert C/D..$26.75
Cosmic Balance C/D....$26.75

ON-LINE

Frogger.....$24.95
Wizard & Prin.....$26.95

ROKLAN

Wizard of War.....$29.75
Gorf.....$29.75
Delux Invader.....$27.95

BIG 5

Miner 2049.....$32.75

BUSINESS

Visicalc.....$159.75
Letter Perfect.....$115.75
Letter Perfect.....$149.75
Data Perfect.....$99.75
Text Wizzard.....$49.75
Spell Wizzard.....$64.75
File Manager.....$69.75
Home File Mgr.....$69.75
Bookeeper.....$119.75
C.R.I.S.....$109.75
Atari Word Pro.....$109.75
Tax Advantage.....$35.75
Home Accountant.....$59.75
Bank Street W.....$49.75
Atari Writer.....$55.75

ADVENTURE

Preppie.....$19.95
Preppie 2.....$19.95
Diskey.....$39.95
Sea Dragon.....$25.50
Stratos.....$25.00
Treasure Quest.....$13.50
Series 1-12.....$15.95
Saga Series 1-6.....$24.95
Stone of Sisyphus.....$29.95
Eliminator.....$16.95

RANA

DISK DRIVES

Elite 1.....$295.00
Elite 2.....$449.00
Elite 3.....$559.00

MICRO-SCI

A2.....call
A40.....call
A70.....call

MUSE

Castle Wolfenstein....$20.75
Caverns of Frietag....$20.75
Robot War.....$26.75

CONTINENTAL

Home Accountant.....$51.75
Book of Apple Software . $16.75

BRODERBUND

Bank Street Writer.....$44.75
AE.....$24.75
Apple Panic.....$21.75
Choplifter.....$24.75
David's Midnight.....$24.75

SPINNAKER

Kindercomp.....$21.75
Story Machine.....$23.75
FaceMaker.....$23.75
Snooper Trooper.....$29.75
Delta Drawing.....$34.75

EPYX

Temple of Apshai.....$26.95
Star Warrior.....$26.95
Crush, Crumble & Chomp . $22.75

ADVENTURE

Sage#1 Adventureland...$29.95
Sage#2 Pirate Adventure.$29.95
Sage#3 Secret Mission...$29.95
Stone of Sisyphus.....$24.95

ALIEN GROUP

Atari Voice Box.....$99.00
Apple Voice Box.....$129.00

VIC 64.....$AVE
1541 Disk Drive.....Call
1525 Printer.....Call
1530 Datasette.....$64.00
1110 64 Ram.....$53.75
1211 Super Expander..$53.75
1212 Programmers Ad.$44.75
1213 Vicmon.....$44.75
Vic 20 dust cover.....$6.99
Vic 64 dust cover.....$6.99

MICROSPEC 64

Inventory Mgr.....$79.75
General Ledger.....$79.75
Payroll Mgr.....$79.75
Accounts Rec.....$79.75
Accounts Pay.....$70.75
Data Base.....$69.75
Checkbook Bal.....$64.75

HES 64

64Forth R.....$55.75
Hesmon R.....$29.75
Turtle Graphics R.....$49.75
Heswriter R.....$38.75
Gridrunner R.....$29.75
Attack of Mut Cam R..$34.75
Turtle Tutor R.....$29.75
Turtle Trainer R.....$29.75
Paint Brush R.....$23.75
Benji Space Rescue D.$29.75
Home Manager C/D....$39.75
Time Money Mgr D....$55.75
OmniCalc D.....$79.75
Sword Point D.....$24.75

EPYX 64

Temple of Apshai.....$26.00
Upper Reaches of A....$15.00
Crush Crumble & C....$23.00
Jumpman.....$26.00

CARDCO

Cardprinter / LO1.....$499.00
Cardprint DN1.....$109.00
5 Slot Expension 64....$54.00
64 Write NOW.....$39.00
64 Mail NOW.....$29.00
2.0 Write NOW.....$29.00
64 Keyped.....$29.00
Universal Cass. Int.....$29.75
Printer Utility.....$19.75
6 Slot Expansion.....$79.95
3 Slot Expansion.....$24.95
Vic 20/64 Printer int....$59.95

BRODERBUND 64

Serpentine R.....$26.75
Choplifter R.....$32.75
Seafox R.....$26.75

PARKER 20

Frogger (ROM).....$33.75
DSort (ROM).....$33.75
Tutankham (rom).....$33.75

SPINNAKER 64

Kindercomp.....$21.75
Story Machine.....$23.75
Face Maker.....$23.75
Snooper Trooper.....$29.75
Delta Drawing.....$34.75
Shamus II c/d.....$24.95
Pinhead c/d.....$22.95

QUICK BROWN FOX

OBF Word Processor.....$49.95

LJK

Letter Perfect.....$105.00
Data Perfect.....$95.00

ADVENTURE INTERNATIONAL

S. Adams Adventure.....$26.75

VIC-64

Household Finance C/D..$24.75

VIC 20

King Arthurs Heir Cass....$24.75
Monster Maze Rom.....$24.75

HARD DISK DRIVES for

APPLE IBM-PC TRS-80*

5 MAGABYTE DRIVE.....$1099.75
10 MEGABYTE DRIVE.....$1399.75
15 MEGABYTE DRIVE.....$1799.75
20 MEGABYTE DRIVE.....$2275.75

Add $40.00 for TRS-80 D. yes

SINGLE DRIVE AT88 S1 ...$359.00
DUAL DRIVE AT88 S2.....$559.00
DRIVE with printer port ...$449.00
AT88 Expansion Board $139.00
DUAL HEAD 44S1 .....$575.00
DUAL DRIVE 44S2 .....$949.00
SINGLE DRIVE 40S1 .....$529.00
ADD ON DRIVES .....$CALL

Lyco Computer Marketing & Consultants

TO ORDER CALL US

TOLL FREE 800-233-8760

In PA 1-717-327-1824

CIRCLE 182 ON READER SERVICE CARD

16K ATARI RAM $49.75
32K RAM $69.75
48K RAM $99.75
64K RAM.....$129.75
128K RAM $399.75
TECH NOTES...$29.75

BOOK of ATARI SOFTWARE 1983
346 pages..... $16.75

CX415 HOME FILING MANAGER $41.75
CXL4007 MUSIC COMP $33.75
CXL4002 ATARI BASIC $45.75
CX8126 MICROSOFT $65.75
CX4119 FRENCH $45.00
CX4118 GERMAN $45.00
CX4120 SPANISH $45.00
CX4108 HANGMAN $12.75
CX4102 KINGDOM $12.75
CX4112 STATES $12.75
CXL4003 ASSEMBLER $45.75

EASTERN HOUSE
Monkey Wrench 2 .....$52.75
INHOME
Baseball.....$29.95
IDSI
Speedway Blast.....$29.95
Pool 1.5.....$28.95

GALAXIAN $29.75
DEFENDER $29.75
DIG DUG $29.75
SPEED READING $53.75
ATARI WRITER $54.75
BOOKKEEPER $102.75
CX4018 PILOT HOME $54.75
CX 405 PILOT EDU.....$91.75
CX404 WORD PRO $99.75
CXL4013 ASTEROID $25.75
CXL4020 CENTIPEDE $29.75
CXL4022 PACMAN $29.75
CXL4011 STAR RAIDER $29.75
CXL4004 BASKETBALL $25.75
CXL4006 SUPER BREAK $25.75
CXL4008 SPACE INVAD. $25.75
CX8130 CAVERNS OF M $27.75

APX
Eastern Ft.41 .....$25.50
DeRay Atari $19.95
Math-Tic-Tac $15.95
Pres of US.....$15.95
3R Math $19.95
Typo Attack $24.95
Family Budget $19.95
F. Cash Flow.....$19.95

BRODERBUND
Bank Street Writer D.....$44.75
AE D.....$24.75
Apple Panic D.....$23.75
Choplifter ROM $32.75
David's Midnight.....$24.75
Stellar Shuttle C/D.....$18.75
Ft. Apocalypse.....$24.75
HES
Gridrunner R $27.75
Sword Point D.....$24.75
INFOCOM
Zork 1/2/or 3 .....$29.95
FIRST STAR
Astro Chase $22.95

RANA DISK DRIVE
1000 .... $CALL

ALIEN GROUP
Voice Box 2 . $99.75
DON'T ASK
Sam $41.75
Abuse $15.95
Telestri.....$27.95
Poker Sam ...$24.95
Amulet
Nuke Sub $16.75
Magic Story Book.....$24.75
Thunder Island.....$13.95
ARTWORX
Hazard Run $24.95
Hodge Podge $18.95
S. Poker.....$28.95
Bridge 3.0.....$18.95
EPYX
Jumpman $28.97
Temple of Apashi.....$27.75
Star Warrior.....$27.75

ATARI Computers for people

MODEMS

ANCHOR MARK I .. $79.00
ANCHOR MARK II. $79.00
HAYES SMART .. $239.00
HAYES MICRO II $309.00
Micro Bit
MPP-1000 ..... $159.00
NOVATION
CAT $144.00
D-CAT $155.00
J-CAT $115.00
APPLE CAT II $279.00
212 APPLE CAT $589.00

MONITORS

NEC JB1260 $125.00
NEC JB1201 $155.00
NEC TC1201 $315.00

Amdek Color I.....$275.00
Amdek 300 Green.... $149.00
Amdek 300 Amber $149.00
Gorilla Green $99.00

WICO JOYSTICKS

APPLE - VIC - ATARI - TI
Command Control.... $20.95
Redball.....$22.75
Apple Trackball.....$58.00
TRACK BALL $52.75
EXTENSION CORD $9.75
APPLE ADAPTOR $18.95
TI ADAPTOR $9.95
POINT MASTER $12.75

apple

APPLE DUMPLING GX $99.75
APPLE DUMPLING 64 (16 Buffer) $179.75
INFOCOM
Zork I, II, or III. $26.75
Daedline $33.75

BLANK DISKETTES

ELEPHANT SS/SD..... $18.25
ELEPHANT SS/DD..... $21.75
KANGAROO SS/DD with storage case $24.75
MAXELL MD I $29.75
MAXELL MD II $39.75
DISK CASE (holds 10) $4.95
DISK CASE (holds 50) $19.75
ROM CASE (holds 10) $19.75

SANYO

MBC 1000 ..... $1549.00
(with microPro software package)
MBC 1250 ..... $2195.00
MBC4050 ..... $2749.00
EFD 160 Disk $499.00
5500 Letter Q. Printer. $649.00

PRINTER INTERFACING AVAILABLE

APPLE DUMPLING GX $99.75
APPLE DUMPLING 64 (16 Buffer) $179.75

	ATARI	APPLE	VIC
EPSON	$35.00	$79.00	$65.00
CITOH	$35.00	$79.00	$65.00
NEC	$35.00	$79.00	$65.00
OKIDATA	$35.00	$79.00	$65.00
GEMINI	$35.00	$79.00	$65.00
SMITH CORONA	$35.00	$79.00	$85.00

Atari parallel Printer cable (5') ...$39.95
Microbits Parallel Cable.....$89.95

commodore 64

HES VIC-20

Torg C.....$14.75
HES Games I C $14.75
HES Games II C $14.75
VIC Fortit Rom $42.75
HES MON Rom $28.75
Turtle Graphics Rom $28.75
HES Writer Rom $28.75
Shamus Rom $28.75
Protector Rom $31.75
Robot Panic Rom $28.75

DISKETTE SALE
BULK DISKS (qty 150) $1.50 ea
Certron CC-10 (3 blank cassettes) ...$3.75

PRINTER RIBBONS AVAILABLE

PROWRITER 2P.....$699.00	
GEMINI 15.....$449.00	
PRINTMASTER....$1589.00	
SMITH CORONA TP1...$549.00	
CITOH 8600B	$1025.00
STARWRITER	$1099.00
OKIDATA 82	SAVE
OKIDATA 83	LOWEST
OKIDATA 84P	PRICE
OKIDATA 93	AVAILABLE
TRACTOR.....	SAVE
OKIDATA 92	$49.75
	$SAVE

SAVE on these in-stock PRINTERS

GORILLA GX-100 .....$199.00
EPSON ..... $CALL
GEMINI 10X $289.00
PROWRITER $359.00
NEC 8023 .....$399.00

MasterCard VISA

TO ORDER

CALL TOLL FREE
800-233-8760
In PA 1 717-327-1824

or send order to
Lyco Computer
P O Box 5088
Jersey Shore, PA 17740

POLICY
In-stock items shipped within 24 hours of order. Personal checks require four weeks clearance before shipping. No deposit on C.O.D. orders. Free shipping on prepaid cash orders within the continental U.S. PA residents add sales tax. All products subject to availability and price change. Advertised prices show 4% discount offered for cash, add 4% for Master Card or Visa. DEALER INQUIRIES INVITED.

the technique. I am sure as you get used to it you will think up more incredible things that can be done.

Now let's get down to the nitty gritty of precisely how all this is done. Before I go too far, I think I should warn you that when working with text, the ATASCII values of the characters in your string will be converted to the *internal* character set. This is a small problem that is easily overcome. As a matter of fact, this little problem can even be turned into a plus when used the right way, but I'll save that for another article.

The first thing you have to do is decide what you want to effect and how much string space you are willing to sacrifice. With this done you can design your string.

Just to simplify things, from here on the string used as an example will be A$. The first thing you want to do is make sure that A$ is the first variable you dimension in your program. This is very important. With this done, the variable table must be located. The pointers for the variable table are memory locations 134 and 135. So VTABLE=PEEK(134)+256*PEEK(135). None of this does us any good unless we know where to put A$.

Since we want A$ to occupy screen memory, we need to know exactly where the screen memory is. Once again we need to use pointers. Memory locations 88 and 89 are the screen memory pointers. Therefore SCREENRAM=PEEK(88)+256*PEEK(89). With this done, we need to figure out the offset of the screen RAM in relation to the present address of A$. This simply means how many bytes difference there is between the two memory locations. The offset formula is OFFSET=SCREENRAM-ADR(A$).

Now that we know the offset and we know where the variable table is, we must alter that variable table so it will move A$. The pointers that locate A$ are at locations VTABLE+2 and VTABLE+3. You will notice that I don't give you specific locations because they vary depending upon the size of your program. We will call these locations V2 and V3. First we assign V3 with the formula V3=INT(OFFSET/256). Then we assign V2 with the formula V2=OFFSET-256*V3. Now we have the variables to assign our pointers, so all that is left is to POKE VTABLE+2,V2 and POKE VTABLE+3,V3.

Abracadabra, your screen is now a string or your string is now a screen. However you want to look at it, it means speed. To make things simple, here is a list of the things to do. As long as you follow them in the exact order you shouldn't have any problems.

1. DIM A$ (selected size)
2. VTABLE=PEEK(134)+256*PEEK(135)
3. SCREENRAM=PEEK(88)+256*PEEK(89)
4. OFFSET=SCREENRAM-ADR(A$)
5. V3=INT(OFFSET/256)
6. V2=OFFSET-256*V3
7. POKE VTABLE+2,V2
8. POKE VTABLE+3,V3

With all these steps completed, all you need to do is assign A$. The purpose of the list is to provide a reference while you are programming.

You are probably thinking that all of this is fine and dandy, but how to use it to do all those wonderful tricks promised? Well, to those experienced in using the Atari string operands the answers should be obvious. By adding and subtracting the right number of bytes, vertical scrolling can be achieved. For example, by adding and subtracting 40 bytes to A$ in graphic mode 0 you can have vertical scrolling. Making a high speed screen saver and multiple playfields is pretty easy. All you need to do is create a large string (not A$) and assign portions of it to A$. By changing the part of the large string assigned to A$, you can design just about anything that needs multiple screens.

A good example of this would be a graphic adventure. If you assign only parts of A$ with several different strings, you can have mixed scrolling. Again this

Program 2. Vertical coarse scroll.

```
1 REM ** MIXED SCROLLING ROUTINE **
3 REM **          WRITTEN         **
4 REM **   BY CHARLES ZUBIETA     **
5 REM
6 REM
7 REM
8 REM
9 REM DIMENSION A$
10 DIM A$(960):REM DIMENSION STRING
19 REM FIND VARIABLE TABLE
20 VTABLE=PEEK(134)+256*PEEK(135)
29 REM FIND SCREEN MEMORY
30 SCREENRAM=PEEK(88)+256*PEEK(89)
39 REM FIGURE OFFSET
40 OFFSET=SCREENRAM-ADR(A$)
49 REM FIGURE POINTERS TO FOR A$
50 V3=INT(OFFSET/256)
60 V2=OFFSET-256*V3
69 REM ASSIGN POINTERS
70 POKE VTABLE+2,V2
80 POKE VTABLE+3,V3
90 DIM M$(2900)
100 SETCOLOR 4,8,4:SETCOLOR 2,0,0:SETCOLOR 1,0,15
102 ? "R":POKE 752,1
105 ? "  Vertical Scroll Example Program":POSITION 8,22:? "Written By
    Charles Zubieta"
106 M$(LEN(M$)+1)="♥♥♥
```

```
190 M$(LEN(M$)+1)="♥♥♥
```

rt...commodore's port...co

Julie Knott and Dave Prochnow

Almost everyone envies the beach dweller. The steady pulsing of the waves sets a body's time to the heartbeat of the earth. This soothing sound, along with the gentle lapping of the water at low tide or the high splashes against the rocks and sand at high tide, is enough to cause all worries of the city to be left behind. Each roar of the ocean, each recession of the tide, takes with it the cares of the day.

The memory of this beauty is transitory and easily lost in the rush of traffic on a homeward voyage, and may not be recaptured until another pilgrimage is made

to the sea. If only it were possible to recreate a small portion of the essence of the beach in everyday life.

Let us break for a moment from this sea side scene. Your own trip to the beach can be accomplished with a Commodore Vic-20 computer.

Surf makes extensive use of user-defined characters to create a realistic beach atmosphere. These custom characters eliminate the need to make do with oversized and unwieldy standard graphics that would provide less than the

desired results. You must take special care in entering the DATA statements for these characters. The omission of a single number or punctuation mark could result in an address being POKEd with a value that will send your Vic into a state of shock from which it can be revived only by turning off the computer and back on.

Julie Knott and Dave Prochnow, 706 Harrington Rd., Bellevue, NE 68005.

Getting Started

Several steps must be taken to prepare the Vic for the defining of custom characters. The standard character set, which is stored in ROM, is moved into RAM so the user can shape the characters freely. Room is prepared for this move by program line 11, while the actual move occurs in line 12.

Because this action causes clutter on the screen, the border and screen colors are first set to black (line 5) and the screen is then cleared (line 10). The unfamiliar CHR$(147) in line 10 replaces the inverse heart for clearing the screen. The result is the same because CHR$(147) is the character code for CLR/HOME.

Making The Characters

Now for the creation of the actual characters. This is done by POKEing the information for a custom character into the locations that formerly stored a standard character. In Surf, custom characters are used to form the outline of a cliff that borders the beach and for the incoming tide.

Line 14 contains a FOR/NEXT loop with READ and POKE statements within

AARDVARK L.T.D.

TRS-80 COLOR COMMODORE 64 VIC-20 SINCLAIR/TIMEX TI99/4A

QUEST — A NEW IDEA IN ADVENTURE GAMES! Different from all the others. Quest is played on a computer generated map of Alasia. Your job is to gather man and supplies by combat, bargaining, exploration of ruins and temples and outright banditry. When your force is strong enough, you attack the Citadel of Moorlock in a life or death battle to the finish. Playable in 2 to 5 hours, this one is diffarant every time. TRS-80 Color, and Sinclair, 13K VIC-20. Extended BASIC raquired for TRS-80 Color and TI99/A. $19.95 each.

32K TRS 80 COLOR Version $29.95

Adds a second level with dungeons and more Questing.

WIZARDS TOWER — This is very similar to Quest (see above). We added wizards, magic, dragons, and dungeons to come up with a Quest with a D&D flavor. It requires 16k extended color BASIC. 13k VIC, Commodore 64, TRS-80 16k Extended BASIC, TI99/A extendad BASIC. $19.95 Tape, $24.95 Disk.

Authors — Aardvark pays the highest commissions in the industry and gives programs the widest possible advertising coverage. Send a Self Addressed Stamped Envelope for our Authors Information Package.

ZEUS — It's fast and furious as you become the WIZARD fighting off the Thunderbolts of an angry ZEUS. Your Cone of Cold will destroy a thunderbolt and your shiald will protect you — for a while. This is the best and highest speed arcade action we have ever dona. Difficulty increases in wave after weve, providing hours of challenging fun and a game that you may never completely master. Commodore 64, Vic20 (16k expander), and 16k TRS-80 Color Computer. (ALL MACHINE CODE!)
$24.95 tape $29.95 disk. (Tape will not transfer to disk.)

ADVENTURES!!!

The Adventures below are written in BASIC, are full featured, fast paced, full plotted adventures that take 30-50 hours to play. (Adventures are interactive fantasies. It's like reading a book except that you are the main character as you give the computer, commands like "Look in the Coffin" and "Light the torch.")

Adventuring raquires 16k on Sinclair, and TRS-80 Color. They require 8k on OSI and 13k on VIC-20. Now available for TI99. Any Commodore 64.
$19.95 Tape — $24.95 Disk.

ESCAPE FROM MARS
(by Rodger Olsen)
This ADVENTURE takes place on the RED PLANET. You'll have to explore a Martian city and deal with possibly hostile aliens to survive this one. A good first advanture.

PYRAMID (by Rodger Olsen)
This is our most challanging ADVENTURE. It is a treasura hunt in a pyramid full of problems. Exciting and tough!

SEAWOLFE — ALL MACHINE CODE In this high speed arcade game, you lay out patterns of torpedoes ahead of the attacking PT boats. Requiras Joysticks, at least 13k RAM, and fast raflaxes. Lots of Color and Sound. A fun game. Tape or Disk for Vic20, Commodore 64, and TRS-80 Color. NOTE: tape will not transfer to disk!
$24.95 Tape — $29.95 Disk.

Dungeons of Death — This is the first D&D type game good enough to qualify at Aardverk. This is serious D&D that ellows 1 to 6 players to go on a Dragon Hunting, Monster Killing, Dungeon Exploring Quest. Played on an on-screan map, you get a choice of race and character (Human, Dwarf, Soldier, Wizard, etc.), a chence to grow from game to game, and a 15 page manual. 16k Extended TRS-80 Color, 13k VIC, Commodore 64. At the normal price for an Adventure ($19.95 tepe, 24.95 disk), this is a giveaway.

Dealers — We heve a line of about 100 original programs for the machines listed here. We hava High speed Arcades, Quelity Adventures, Word processors and Business Softwere for Smell mechines. Better yet, we have excellent Dealer support. Phone for informetion.

Send $1.00 for Complete Catalogue - Please specify system on all orders - $2.00 Shipping Charge on each order

VISA

AARDVARK L.T.D.

2352 S. Commerce, Walled Lake, MI 48088 / (313) 669-3110

MasterCard

Phone Orders Accepted 8:00 a.m. to 4:00 p.m. EST. Mon.-Fri.

1-800-624-4327

CIRCLE 101 ON READER SERVICE CARD

Commodore's Port, continued...

the loop. When the program executes this line, the data for the custom characters are POKEd into RAM where characters @ through J are stored. After this happens, each time one of these characters is called upon in the program it will have this new appearance. The DATA for this metamorphosis are stored in lines 15 through 18.

The special characters are placed on the screen along with all the others that make up the sky, sea, sand, and cliff. Characters are referred to by their screen codes and placed on the screen by FOR/NEXT loops with READ and POKE statements (lines 20-30). This forms only the skeleton of the landscape, however.

Life really comes into the program in lines (33-43). This is where the colors for the sky (blue), the cliff (black) and the sea (cyan) are POKEd into their appropriate color memory locations. Screen and border colors become light yellow and white respectively after the POKE in line 55.

Colors

Custom characters are the same as regular characters in that they are composed of two colors – those of the selected screen and character colors. The selected screen and character colors for Surf are yellow and black, respectively. When the special characters that form the base of the cliff are POKEd onto the screen they appear naturally against the sand-colored screen.

However, conventional custom characters could not have been used for the top of the cliff. The black of the cliff characters would have blended in well with the rest of the cliff, but large sand-colored "steps" would have appeared above these characters where sky-blue belongs – a result of having only two colors for each character. Since this ludicrous scene was unacceptable, another method was sought to create a realistic picture.

The Vic has a multi-color mode which it can enter and allows each character to contain up to four colors. The appearance of any character on the Vic screen is determined by a binary pattern stored in character memory (the one we altered to create custom characters). In normal mode a 1 stands for the character color and a 0 stands for the screen color. Simple. In multi-color mode, the bits are controlled in pairs. Each of the four possible orders of a pair (00, 01, 10 and 11) stands for a color. So four colors can be found in a single character.

Using this method, the custom characters for the top of the cliff were assembled by color pattern rather than by shape. The screen locations where these characters appear are set to multi-color mode in lines 49 and 50. The sand-steps are eliminated and blue sky prevails!

Listing 1.

```
5 POKE 36879,8 TI$="000000
10 PRINT CHR$(147)
11 POKE 52,29 POKE 56,29 CLR
12 FOR A=7168 TO 7431 POKE A, PEEK(A+25600) NEXT
13 POKE 36869,255
14 FOR A=7168 TO 7255 READ B POKE A,B NEXT
15 DATA 102,126,170,170,170,170,170,170,34,251,251,170,170,170,170,170,170,
255,255,255,191
16 DATA 175,171,171,170,255,255,255,255,255,255,255,255,254,240,192,
0,0,0,0,255,255
17 DATA 255,253,252,240,192,128,255,254,244,240,224,192,192,128,255,255,
63,31,7,1,3,1
18 DATA 252,128,128,248,128,128,128,0,0,0,0,0,0,0,255,255,255,255,
239,207,195,128
19 '=3 GOSUB 90
20 FOR A=1 TO 35 READ B READ C POKE B,C NEXT A
21 FOR A=1 TO 16 READ B READ C POKE B,C NEXT
22 FOR A=7680 TO 7811 POKE A,3 NEXT
23 FOR A=1 TO 7
24 READ B READ C FOR D=B TO C POKE D,3 NEXT D NEXT A
25 DATA 7812,1,7813,2,7834,3,7835,3,7836,2,7856,3,7857,3,7858,3,7859,2,
7878,3,7879,3
26 DATA 7880,3,7881,3,7882,2,7900,3,7901,3,7902,3,7903,3,7904,3,7905,2,
7922,3,7923,3
27 DATA 7924,3,7925,3,7926,3,7927,3,7928,2,7944,3,7945,3,7946,3,7947,3,
7948,3,7949,3
28 DATA 7950,3,7951,0,7966,3,7967,3,7968,3,7969,3,7970,3,7971,5,7972,4,
7988,3,7989,3
29 DATA 7990,3,7991,3,7992,6,8010,3,8011,3,8012,6,8032,6,7814,7853,7837,
7855,7860,7877
30 DATA 7883,7899,7906,7921,7929,7943,7952,7965
33 FOR A=1 TO 10 READ B READ C FOR D=B TO C POKE D,0 NEXT D
34 NEXT A
35 POKE 36752,0
36 FOR A=1 TO 7
37 READ B READ C FOR D=B TO C POKE D,6 NEXT D
38 NEXT A
39 FOR A=38672 TO 38685 POKE A,2 NEXT
41 DATA 38532,38538,38554,38556,38576,38579,38598,38602,38620,38625,386
42,38648,38664
42 DATA 38671,38686,38692,38708 38712,38730,38733,38400,38531,38534,385
53,38557,38575
43 DATA 38580,38597,38603,38619,38626,38641,38649,38663
45 FOR A=1 TO 8 READ B POKE 38000+B,8 NEXT
50 DATA 532,533,556,579,602,625,648,671
55 POKE 36879,249
56 FOR A=38694 TO 38697 POKE A,2 NEXT
57 FOR A=7974 TO 7977 READ B POKE A,B NEXT
58 DATA 19,21,18,8
```

Sound

Now that the seaside scene is set, it is time to describe the surf sound itself. Long before any of the beach appears on the screen at the start of the program, the sound of the breaking surf begins. Line 19 sends program execution to the sound subroutine beginning at line 90 and ending at 104. Two of the Vic voices, the white noise (speaker number 4) and a low tone (speaker number 1), are turned on in line 90.

The variable Z in line 91 is set prior to execution of the subroutine and establishes the number of complete wave swells that should occur. Each of these swells lasts for a random duration set in line 92. The volume of the two tones is increased and decreased using the variable I (lines 93 and 98). This varying volume value is POKEd into the volume memory location (36878).

If you have ever worked with sound on the Vic, you may be confused by the adding of 96 to the volume value. The memory location that is being POKEd with this volume information, 36878, is also affected by the use of multi-color mode. An auxiliary color for the multi-color mode is selected, in this case blue for the sky, and multiplied by 16. This number, 96, is POKEd into location 36878 right along with the selected speaker volume.

After all of this initial set-up and after three wave sounds have crashed, dawn breaks on the beach. The title, Surf, appears on the sand at the water's edge. Line 56 POKEs the color memory locations where the title appears with red. The letters themselves are POKEd onto the screen by lines 57 and 58.

The character memory locations for the character F were used for part of the bottom edge of the cliff. An alternate character had to be reformed in the shape of an F for use in the title. This alteration occurs in lines 14 through 18 along with the other characters, and this new F is used normally with the other title characters.

```
59 Z=INT(RND(1)*6+2 GOSUB 90
60 FOR A=38694 TO 38707 POKE A,2 NEXT
61 POKE 38717,2 POKE 38718,2
62 POKE 7974,7 POKE 7975,5 POKE 7976,10 POKE 7977,7 POKE 7978,4 POKE 79
79,7 POKE 7980,5
63 POKE 7981,7 POKE 7982,4 POKE 7983,7 POKE 7984,6 POKE 7985,7 POKE 798
6,5 POKE 7987,4
64 Z=INT(RND(0)*17) GOSUB 90
68 POKE 7998,9 POKE 7997,9 FOR A=7987 TO 7975 STEP -1 POKE A,9 NEXT POKE
7974,9
69 FOR A=1 TO 1000 NEXT
70 IF TI$="001000" AND T1$="001015"THEN 110
71 IF TI$="003000" AND T1$="003015"THEN 120
72 IF TI$="005000" AND T1$="005015"THEN 130
74 IF TI$="010000" THEN END
75 GOTO 60
90 POKE 36878,200 POKE 36874,128
91 FOR W=1 TO 2
92 W=INT(RND(1)*235)+55
93 FOR L=3 TO 15
94 POKE 36878,W+L
95 FOR A=1 TO M
96 NEXT
97 NEXT L
98 FOR L=15 TO 3 STEP -1
99 POKE 36878,W+L
100 FOR A=1 TO M
101 NEXT
102 NEXT W
10 RETURN
64 RESTORE
110 POKE 36878,0
111 FOR A=828 TO 829:READ B:POKE A,B:NEXT
112 DATA 8,28,62,124,56,16,40,40
113 POKE 7680,1:POKE 30720,4
114 GOTO 60
120 FOR A=7954 TO 7956:READ B:POKE A,B:NEXT
121 DATA 24,28,10,112,240,24,24,24,24,24,24,24,24,24,24,24
122 FOR A=30724 TO 30725:POKE A,5:NEXT
123 FOR A=8054 FOR A=1 TO 21 POKE A+1,32:POKE A,30:POKE A-1,31:
124 FOR A=1 TO 100:NEXT:POKE A,32:POKE A+1,32:NEXT A
125 GOTO 60
130 FOR A=8044 TO 8047:POKE A,4:NEXT
131 FOR A=7280 TO 7281:READ B:POKE A,B:NEXT
6 DATA 42,85,21,85,21,85,21,85
133 FOR A=7677 TO 7746 STEP -1:POKE A,1:POKE A-30720,6:NEXT
134 GOTO 60
150 FOR A= 8400 TO 28905:POKE A,0:NEXT:GOTO 60
```

The waves themselves are created in lines 60 through 63. The screen locations where the wave washes up on the shore are POKEd with cyan in lines 60 and 61, and the characters that form the wave are POKEd onto the screen in lines 62 and 63. The visual appearance of the wave corresponds with its sound.

After the water washes up on the shore, line 64 sends program execution to the sound subroutine (line 90), and when this has been completed the wave is erased by line 68.

Timing

In one hour Surf will cycle through a complete day of common beach behavior—from dawn to dusk. Within the Vic is a real time clock that may be controlled by the variable TI$. At the beginning of Surf, this variable is set to 000000. As the program progresses, different vignettes occur on the screen. Lines 70 through 74 check to see how the time is advancing and, if appropriate, will send execution of the program to one of these subroutines.

Ten minutes into the program, line 70 will send program execution to line 110. A pop can is washed up onto the shore and then taken back out to sea to litter the ocean.

Later, at the half hour point, line 71 transfers the program to line 120 where a sea bird is made to hop into view. Lines 120 and 121 create two figures of the bird. The strip of screen across which the bird struts is set to green in line 122. This area retains its yellow beach color and only appears green in the location of the bird figure. Lines 123 and 124 first print a standing bird figure on the screen. The bird stands for the duration of one wave sound and is then replaced by a hopping bird figure. There is a slight delay to allow a viewer's eye to see the hop, and then this screen location is POKEd with an empty space. The bird jumps to the next space and on across the screen.

Just as at a real beach, clouds appear in the sky of our computer beach as the day draws to a close. At 50 minutes into the program line 72 reads the value of TI$ to be greater than or equal to 005000 and program execution falls to line 130. This line sets a row of screen locations across the sky to multi-color mode. Again, this mode was chosen to allow colors other than those of the border and screen to be used to create the cloud. The figure itself is formed in lines 131 and 132. The cloud floats lazily across the sky as dictated by line 133, with two swells of the surf occurring between each screen animation jump.

Each of the characters—the pop can, the bird, and the cloud—is approximately the same size, but this should not be considered unusual. All are completely in proportion in relation to where they occur on the screen, giving a greater feeling of depth to the beach scene. The bird appears large in the foreground while the smaller, distant cloud passes in the background.

The large gap in the program listing between line 134 and line 150 was reserved for yet another scenic diversion. It was planned to present a ship passing across the horizon, but memory limitations prevented the smooth execution of this animation. For one thing, the ship seemed to skim across the very top of the water, and for another, as soon as the ship reached the cliff, it appeared to be beached. Rather than letting the poor ship run aground on our beach, it was decided to let it rest, more safely, in our imaginations.

Finally, dusk falls on the beach at the end of the day. Line 74 detects this and sends the program on to line 150. Night covers the beach, leaving only shadows and headlights on the cliff and shore. All of the locations in color memory are POKEd with black, leaving only the multi-color spaces with some sand color in them. The duration of this night is the time it takes for two wave swells. On returning from the surf sound subroutine the RUN statement is issued, resetting the TI$ clock to 000000 and beginning the entire process again.

After carefully entering Surf, type RUN, press RETURN and get ready for the mind-soothing, lulling action of waves crashing on your private coast. Surf will continue to run until you either press and hold the RUN/STOP key while pressing the RESTORE key or turn the Vic off. Remember, if you elect to turn the Vic off Surf is lost unless you recorded the program on a cassette tape (or disk).

Of course you could re-type the entire program every time that you want to use it. But, a wiser decision would be to purchase the Commodore cassette recorder and make a permanent cassette copy. Then when the winter winds begin to howl you can quickly transport your thoughts to your own isolated, sun drenched computer beach. □

mages...ibm images...ibm im

Susan Glinert-Cole

The column is a bit terser this month, as we have been occupied with moving to warmer parts of the country. There is a subtle irony behind this upheaval, which may be gently described as Will Fastie's idea of a final revenge. As I am now working for him, it remains to be seen to whom the final revenge will be awarded.

The computer will enjoy the freedom from woodsmoke (as will the rest of us). I have been mildly insistent, at the top of my lungs, about the next house having absolutely no flue, chimney, thimble, fireplace, woodstove, or any object which needs to be fed every few hours with things which deposit bark particles and confused ants on the floor.

For the first time in years I can look forward to October weekends. Hitherto they have been occupied with standing on top of ten cords of renewable resource with a 16" chainsaw or staggering under a load of same renewable resource on the way to the barn. Now you know why I don't have any energy left over to swap disks. I am hoping that a more benevolent climate will leave me with enough vigor to cope with a three pass compiler.

More on the NEC 8023A

There has been so much mail about the NEC 8023A printer the past few months that it is time I responded in a more constructive manner than that of putting the letters carefully away in the filing cabinet. First, there is the matter of printer ink. The suggestion regarding the use of stamp pad ink to rejuvenate the cartridge rollers drew gasps of horror from a few people.

They maintain that stamp pad ink does not contain the proper lubricants for dot matrix printheads and would therefore do much damage if used. This may very well be true; I am not by any means an expert in the area. I used the stamp pad ink approach for about eight months, and my printer has not appeared to suffer from this abuse.

For the wary, however, ink of the proper quality for dot matrix ribbons may be ordered from Ben Torres Ribbon Service. An alternative to constantly reinking ribbons is to squirt the ribbon with WD-40 and allow the ribbon to dry for a few hours with the cover off. I tried this about a year ago before I discovered stamp pad ink and it works well on a one-time only basis. The next ribbon drenching ceremony should feature some sort of ink, as the WD-40 is merely a one-shot rejuvenator.

Next, the mystery of the Ctrl + PrtSc command was solved by several people. Switch 1-7 should be set to the ON (closed) position. The PrtSc function will work perfectly, and other printed files, such as Basic listings and word processor printouts, will not have the extra linefeed (see below).

The manual that came with my printer was not exactly a prototype of limpid prose. I think it was written in Japanese and then translated, word by word, into English. The fact that all the examples are for the NEC personal computer didn't help either. For the record, then, here are the functions reserved for the two DIP switches.

Switches 1-1, 1-2, and 1-3 are used to select the appropriate character set, depending on which country you are presently residing in (or feel like writing in). If they are all off, the Japanese character set is selected; the correct setting for the United States is OFF ON OFF respectively.

If the British character set is selected by setting Switch 1-1 ON, the # sign on the keyboard becomes the £ sign. Setting the switches as described in the manual for the German and Swedish character sets will sprinkle umlauts throughout the text.

A table in the back of the manual shows the replacement characters applicable to each character set. Switch 1-4 determines how many lines are on a page for the Top of Form character. The default setting is OFF for 66 lines; if you prefer legal sized paper, setting it ON will set 72 lines per page as the default.

Switch 1-5 should be OFF. This allows you to select or deselect the printer from the keyboard or a program by sending a CHR$(17) for select or a CHR$(19) for deselect. These signals are equivalent to pressing the SELECT switch on the front of the printer. If this switch is turned ON, these characters will be ignored by the NEC.

Switches 1-6, 1-7, and 1-8 determine what happens at the end of a print line. The factory settings are: ON OFF OFF respectively. Ctrl + PrtSc will have the

Susan Glinert-Cole, Suite 211, World Trade Center, Baltimore, MD 21202. Correspondence can only be acknowledged when a stamped, self-addressed envelope has been provided.

ALL BEAGLE DISKS ARE UNLOCKED, COPYABLE, AND COMPATIBLE WITH APPLE II, II+ AND IIe.*
(Don't Settle for Less!)

* APPLE ® a Registered Trade Mark of You-Know-Who

APPLE MECHANIC
SHAPE-WRITER / BYTE-ZAP UTILITY
by BERT KERSEY

SHAPE EDITOR: Keyboard-draw shapes for animation in your programs. Create **Proportionally-Spaced Typefaces** with special characters. Six fonts included. Listable Applesoft demos show you how to animate graphics and create professional Charts and Graphs.

BYTE-ZAP: Rewrite any byte on a disk for repair or alteration. Load entire sectors on the screen for inspection. **Hex/Dec/Ascii** displays are all useful. Educational instructions include experiments for making trick file names, restoring deleted files, changing DOS, etc.

MORE: Useful music, text and hi-res tricks for your programs. Clear educational documentation.
($29.50: Includes Peeks/Pokes Chart & Tip Book #5)

APPLE MECHANIC TYPEFACES
26 NEW FONTS for use with Apple Mechanic programs. Many sizes of fully-editable characters.

BEAGLE MENU: Displays the typefaces you want from your disks (for example, only *Applesoft* files or only *Locked* files) for fast one-key cursor selection.
($20.00: Includes Peeks & Pokes Chart)

HMMM... THIS AD SAYS THAT "ALL BEAGLE DISKS NOW COME WITH AN UPDATED (4/83) PEEKS & POKES CHART."
—AND TWO DISKS COME WITH OTHER CHARTS AS WELL!"

ALPHA PLOT
HI-RES GRAPHICS/TEXT UTILITY
by BERT KERSEY and JACK CASSIDY

DRAW IN HI-RES on both pages using keyboard OR paddles/joystick. View lines before plotting. Use mixed-colors and Reverse (background opposite) plotting. Fast hi-res circles, boxes and ellipses; filled or outlined.

Compress Hi-Res Images to 1/3 Disk-Space. Superimpose hi-res pages 1 and 2 or re-colors any rectangular image area anywhere on either hi-res page.

Proportionally-Spaced Hi-Res Type with adjustable character size and color. Type over lower graphics with no htab/vtab limits. Sideways typing for graphs too.
($36.50: Includes Peeks/Pokes Chart & Tip Book #4)

DOS BOSS
DISK COMMAND EDITOR
by BERT KERSEY and JACK CASSIDY

RENAME DOS COMMANDS and Error Messages. "Catalog" can be "Cat"; "Syntax Error" can be "Oops" or *anything*. **Protect your programs**—An unauthorized **Save**-attempt can produce a "Not Copyable" message, or *any* message you want. Also: List-Prevention and one-key program-execution from catalog.

Customize DOS. Change the Disk Volume heading to your message or title. Omit or alter catalog file codes. Fascinating documentation, tips and experiments.

ANYONE using your disks (booted or not) will be formatting DOS the way *you* designed it.
($34.00: Includes Peeks/Pokes Chart & Tip Book #2)

TIP DISK #1
by BERT KERSEY

100 LISTABLE PROGRAMS from Beagle Bros Tip Books 1-4. Make your Apple do things it's never done! All 100 programs are changeable for experimentation. Includes Apple COMMAND CHART with all Applesoft, Integer Basic & DOS Commands and Descriptions!
($20.00: With 2 Charts: Peeks/Pokes & Commands)

Beagle Bros
Micro Software Inc.

4315 SIERRA VISTA / SAN DIEGO, CA 92103
619-296-6400

UTILITY CITY
21 USEFUL UTILITIES by BERT KERSEY

LIST FORMATTER prints each program statement on a new line. Loops indented with printer Page Breaks. A great Applesoft program de-bugger! Also:

Multi-Column Catalogs for printouts, auto-post Run-number & Date in programs, put invisible commands in programs, create **Invisible File Names**, alphabetize/store info on disk, convert dec to hex or Integer to FP, protect and append programs, dump text to printer...

MORE TOO! 21 Programs Total, a best-seller!
($29.50: Includes Peeks/Pokes Chart & Tip Book #3)

New!

PRONTO-DOS
HIGH-SPEED DOS / DOS-MOVE UTILITY
by TOM WEISHAAR

Put HIGH-SPEED DOS in your Apple's normal memory, Language Card or Apple IIe's high-memory—

Function	Normal	Pronto
BLOAD HI-RES IMAGE	5 sec.	3 sec.
LOAD 80-SECTOR PROGRAM	16 sec.	4 sec.
SAVE 80-SECTOR PROGRAM	24 sec.	9 sec.
BLOAD LANGUAGE CARD	13 sec.	4 sec.
(Text Files: No Change)		

Boot the Pronto disk or your customized disks, created with the normal INIT command. Compatible with ALL DOS Commands, GPLE® and most of your programs.

Move DOS to your Language Card or Apple IIe standard high-memory, freeing up **10,000** Extra Bytes!

15 Extra Sectors per disk, Catalog Free-Space display, new "TYPE" Command reveals Text File contents...
($29.50: Includes Peeks & Pokes Chart)



FLEX TEXT
20/40/56/70-COLUMNS WITHOUT HARDWARE
by MARK SIMONSEN

PRINT VARIABLE-WIDTH TEXT on both hi-res screens with normal Applesoft commands (including Htab 1-70). Normal, expanded & compressed text with no hardware. 70-column requires b-w monitor (not tv).

Add Graphics to Text or Text to Graphics. Run your existing Applesoft programs under Flex Text control. Fast, easy to use and compatible with GPLE.®

DOS Tool Kit® font compatibility, or use the supplied Flex Text typefaces. Select style & fonts with control-key commands. Custom text character editor included.
($29.50: Includes Peeks & Pokes Chart)

FRAME-UP
HIGH-SPEED PRESENTATION UTILITY
by TOM WEISHAAR

MAKE PROFESSIONAL PRESENTATIONS of existing hi-res, lo-res and text frames. *FAST* hi-res loads in 2½-seconds! Paddle or Keyboard-advance frames.

Unattended Shows are optional with each picture arranged and pre-programmed to display from 1 to 99 seconds. **Text Screen Editor** lets you create black-and-white text "slides" and add type "live" from the keyboard during shows. Mail copies of presentations on disk to friends and associates (or home to Mom!).
($29.50: Includes Peeks & Pokes Chart)

New!

BEAGLE BASIC
APPLESOFT ENHANCER by MARK SIMONSEN

Requires Apple IIe (or II/II+ with RAM Card)

RENAME ANY APPLESOFT COMMAND or Error Message to any word, for program clarification or encryption. Plus add optional NEW COMMANDS—

ELSE follows IF-Then's (as in IF X=0 THEN PRINT "Yes": *ELSE* PRINT "No"). **SWAP X,Y** exchanges 2 variables' values. Use **TONE** command to write music with no messy pokes & calls. **HISCRN** reads the color (or/on) of any hi-res dot. **SCRL** scrolls the text screen in *either* direction. **TXT2** lets Text Page 2 act like Page 1.

Also— GOTO or GOSUB many precalculated variables (as in "GOSUB FIX" or "GOTO 4+X". Escape-mode indicated by special ESC CURSOR. Replace Apple's awkward Graphics Screen Switch Routines with one-word commands. Change ctrl-G Beep to any tone. INVERSE REM STATEMENTS too! All GPLE® compatible.

These new features occupy ZERO extra memory!
($34.95: Includes Peeks/Pokes Chart & Tip Book #6)

BEAGLE BAG
12 APPLE GAMES by BERT KERSEY

COMPARE BEAGLE BAG with any single-game locked-up disk on the market today. All 12 games are a blast, the price is right, the instructions are crystal clear, *and* the disk is COPYABLE. You can even *change* the programs or list them to learn by seeing how they work.

1 twelve Games from the Applesoft Ace, Bert Kersey—TextTrain, Wowzo, Buzzword, Magic Pack & more...

Excellent Reviews—from Jan-83 *Softalk*, page 148). BEAGLE MENU too. Description under "Typefaces".
($29.50: Includes Peeks & Pokes Chart)


DEAR BEAGLE BROS—
MY LOCAL SOFTWARE STORE DIDN'T HAVE ANY OF YOUR DISKS. SO I GOT ON THEIR CASE & TOLD THEM TO TELEPHONE YOU OR ANY SOFTWARE DISTRIBUTOR RIGHT AWAY
WELL, IT WORKED. AND I GOT MY DISK IN JUST A COUPLE OF DAYS. THANKS!

New!

DOUBLE-TAKE
2-WAY-SCROLL/MULTIPLE UTILITY
by MARK SIMONSEN

LISTINGS & CATALOGS SCROLL Up *AND* Down, making file names and program lines much easier to access. Arrow-keys control scroll direction. New Applesoft LIST FORMAT: each program statement on new line for *FAST* program tracing and de-bugging.

Variable-Display shows all of a program's strings and variables with current values. **Cross-Reference** shows line nos. on which each variable & string appears. Better **Renumber/Append** to *Merge* programs (not just connect end-to-end). Also **Auto-Line-Number**, Instant Hex to Dec Conversion, Memory Stats, Eliminate/Restore Cursor, Free Space-On-Disk... All GPLE® compatible.
($34.95: With 2 Charts: Peeks/Pokes & "Tips & Tricks")

RUSH the following disks by First Class Mail—

☐ Alpha Plot . . . $36.50	☐ Flex Text . . . $29.50
☐ Ap.Mechanic . . 29.50	☐ Frame-Up 29.50
☐ A.M.Typefaces 20.00	☐ ProntoDOS . . . 29.50
☐ Beagle Bag . . . 29.50	☐ Tip Disk #1 . . . 20.00
☐ Beagle Basic . . 34.95	☐ Utility City 29.50
☐ DOS Boss 24.00	☐ ADD ME to mailing list.
☐ Double-Take . . 34.95	☐ ALREADY ON mailing list.

AT YOUR APPLE DEALER NOW!
Or order directly from Beagle Bros—



Visa/MasterCard or COD, call TOLL-FREE
Nationwide: **1-800-854-2003** ext. 827
California: **1-800-522-1500** ext. 827
Alaska/Hawaii: **1-800-854-2822** ext. 827

OR mail U.S.Check, Money-Order or Visa/MC# to BEAGLE BROS, 12th Floor
4315 SIERRA VISTA, SAN DIEGO, CA 92103

Add $1.50 First Class Shipping, Any-Size Order
Overseas add $4.00. COD add $3.00. California add 6%.
ALL ORDERS SHIPPED IMMEDIATELY.

COPYRIGHT © 1983 BEAGLE BROS MICRO

AD #12

CIRCLE 116 ON READER SERVICE CARD

ZENITH APPLE EPSON ATARI V20

Computer		Printer interface
Epson HX-20	850	for most computers
Zenith	call	serial 25
		parallel 37
Monitor		
Zenith green 12	119	
Comrex color 13 in	395	Software for business
Comrex RGB 13 in	529	Zenith B or 16 bit 269
		Peachtree GL AP AR ea 269
Printers		Supercals 199
MX80III	525	Wordstar 269
FX80	695	Datastar 199
		Multiplan 179
Disk drives		GL for HDOS 89
Rana elite one	349	Inventory for HDOS 69
Rana elite two	499	
Rana elite three	699	
Controller	109	Apple
Zenith Z87-89 dual dr	949	broderbund payroll 295
Zenith Z87-90 dual dr	949	GL with Payables 389
		Accounts receivable 299
VIC 20		On-line screenwriter 88
Video pak 64k	355	Writer professional 137
Video pak 16k	177	CP/M-86, Rainbow, IBM PC
Video pak 80	159	Xerox, Superbrain, Northstar
Video pak z-80	269	Osborne I, Victor 9000 etc
Memory cart 16k	79	Calcstar 119
Expansion chasis	49	Datastar 219
Micro expand chasis	39	Infostar 369
Video cable VIC20	19	Mailmerge 189
Video cable Com64	21	Spellstar 189
Wordmaster	79	Supersort 189
Printer interface	68	Wordstar 349
		wordstar + Mailmerge 469
MICROSALES INC		wordstar + Spellstar 499
4787 Kingsway BBY		Word + Spell + Mail-Star 629
Vancouver BC V5H 2C6		GAMES!!!
8-5 50 Phone 604 433 4685		Apple ATARI V20
after store hrs 433 8043		Choplifter 26
ALL US $ Check, money order		Serpentine 26
Add 3% for M. card or VISA		Track attack 22
Shipping $2 for software		and much much more call

CIRCLE 241 ON READER SERVICE CARD



For Home or Business
WHAT...WHEN...HOW...

LEARN HOW TO USE A COMPUTER

Train at home in spare time! No previous experience needed! Now you can learn it all! Computer programming...computer applications... computer games...everything you ever wanted to know about computer operations! Write your own computer programs or use hundreds of programs already available...budgeting, real estate, bookkeeping, expenses, investments, interest, taxes, shopping lists, vacation planning, addresses, phone numbers, routing ...even foreign languages and graphics.

You'll know what really happens when you have a computer problem with a bank, store, loan company, oil company, utility or anyone else. You'll be able to talk their language...understand why and how things happen...to be able to take the offensive when you're the victim of a computer error. Experts explain everything in easy-to-understand language with step-by-step directions.

- **TIMEX COMPUTER INCLUDED WITH YOUR TRAINING**
- **Plugs into any TV • SEND FOR FREE FACTS!**

ICS Since 1890 — Computer Training, Dept. DH093, Scranton, PA 18515

Please rush me free facts and color brochure that tells how I can learn computer applications, programming and operation at home in spare time. No cost. No obligation.

Name _____ Age _____

Address _____

City/State/Zip _____

IBM Images, continued...

effect of printing everything on one line, although output from my word processor is correct. As stated above, setting Switch 1-7 ON will correct this problem.

For the curious, the various permutations are:

OFF OFF OFF: All output is printed on one line.

OFF OFF ON: Inserts an extra carriage return/linefeed; word processor output is double spaced but PrtSc is correct.

OFF ON OFF: Both the word processor and PrtSc do a correct page print.

OFF ON ON: Extra carriage return/linefeed inserted in both PrtSc and other output.

ON OFF OFF: PrtSc prints on one line but word processor output is correct.

ON OFF ON: Extra carriage return/linefeed in word processor output, but PrtSc is correct.

ON ON OFF: Both PrTSc and other output are correct.

ON ON ON: Extra carriage return/linefeed in both PrtSc and other output.

Switch 2-1 determines whether you have a slash through the zero. This is a matter of taste; if you are a slasher, set Switch 2-1 ON. Switches 2-2, 2-3, and 2-4 are particularly useful if more than one printer is being driven from the same port and you wish to send information to a specific device. Normally, Switch 2-2 is OFF; turning it ON assigns each printer a device address as determined by Switches 2-3 and 2-4.

Since two switches are allotted to address specification, up to four (two squared) devices may be used in this manner. An address is enabled with Esc + a-d, where a is device 0, b is device 1, and so on. When using this mode, the printer(s) must be on-line, that is, the SELECT light must be lit. The appropriate escape code as described above will then activate the designated device.

Switch 2-5 determines the default typeface when the printer is turned on. The default (OFF) is pica; proportional printing is selected if 2-5 is turned on. Switch 2-6 selects 7- or 8-bit data. This should be OFF (8-bit) for the IBM. Switch 2-7 determines whether the printer is in the selected state at power-up (e.g. puts the printer on-line). This should be ON, for select. The factory setting is OFF, which means you have to press the SELECT switch every time you turn on the printer, something you may not remember to do or want to be bothered with.

Printer Formatting Program

Several months ago I promised a Basic version of the printer formatting program which originally appeared in USCD Pascal. Wait no longer. Here it is in *two* different versions. The fundamental premise, as in the original, is to conveniently send codes to the printer from inside of a file to make the output look resplendent, exotic, or what have you. The first (Listing 1), short program is very simple, and can be easily adapted to any other printer by simply changing the codes in lines 4700-6000. Other, more elaborate functions can also be added—horizontal and vertical tabs for example. The program is organized in a manner commensurate with customization. Options such as double spacing or page number subroutines can be worked in around lines 840-940.

Somewhere around lines 4000-4600 I intend to insert a routine which will recognize the REM string and print these lines in a different typeface for added

Figure 1.

```
Bit 7 → 0 0 0 1 0 0 0 0 ← Bit 0
pin # 11 10 12 13 15 – – –
```

readability in a program listing. This version of the program was deliberately kept short and moderately generic so that other printers may be accommodated too.

Line 545 deserves some comment. When I wrote the program, I originally used the command LPRINT to send all codes to the printer. This resulted in an extra linefeed being inserted after every line of the file. It took me a while to find the cause of this, because the Basic manual misspoke on the subject.

It claims that Basic will send an extra carriage return/linefeed after printing 80 characters unless the statement is ended with a semicolon.

In fact, Basic seems to print the extra cr/lf pair regardless; it blithely ignored the semicolons and casually double spaced everything anyway. Specifying a WIDTH:"LPT1:",255 will disable line folding. In the interest of generality, the final version opens "LPT1:" as a file and printing the character codes to it. This allows the output to be directed to any file (disk, communications, and so on) by changing "LPT1:" to the desired file name.

The program takes each character in the specified file and checks to see if it is the start of a printer command. If so, the program goes to a routine which reads the code sequence into CODE$ and then sends it to the printer.

The printer commands are recognized by square brackets ([]), but these may be changed in lines 1080 and 4080. If your preference, for example, is to put the commands on separate lines, make the termination character a carriage return (CHR$(13)).

The WAIT statement in line 6900 is a very useful command. Many routines which deal with printer errors simply make the computer do some mindless arithmetic while the operator is supposed to be turning on the printer. This is not very elegant, and, as you might have suspected by now, there is a better way.

The improved method instructs the computer to twiddle its thumbs until it receives a SELECT signal from the printer. The trick in implementing the WAIT was to locate both the proper port number to poll and the correct series of bits which would be recognized as the SELECT signal. This information can be found by a close reading of pages 2-72 and 2-73 in the Technical Reference Manual. The SELECT signal travels on pin 13 of the printer adapter connector via port (address) 378H.

There are, as usual, eight bits sent to the computer in this byte and we are interested in having the computer wait around until pin 13 becomes active (ON or 1). The signal byte we wait for therefore looks like Figure 1.

Those of you who took last month's column to heart will instantly recognize 00010000 as 2, or 32 decimal. Line 6900 thus specifies that the computer wait until 00010000 appears at port 379H. (Note: if there is an IBM monochrome display/printer adapter board in use, the correct address is 3BDH).

There appeared, from the letters I received, to be some confusion about the printer codes themselves. One problem is that some of the codes must be prefaced by an escape character (CHR$(27)), while others may not be so preceded. This is manifested, for example, with the

TRS-80 COMPUTERS
ALL PURE RADIO SHACK EQUIPMENT

DISCOUNT 15% AND UP
ALL TRS-80 MODELS

- COMPUTERS
- PRINTERS
- ACCESSORIES
- GAMES

CALL FOR OUR COMPETITIVE PRICES ON OTHER MAJOR BRANDS

FREE PLEASE WRITE AND REQUEST . . .
- CUSTOMER DISCOUNT PRICE LIST
- MANUFACTURE WARRANTIES

© TRS-80 TANDY CORPORATION

PERRY COMPUTERS
Dept. No. H-8 137 NORTH MAIN ST. PERRY, MI 48872
FOR ORDERS CALL 1-800-248-3823
FOR INFORMATION CALL (517) 625-4161

CIRCLE 173 ON READER SERVICE CARD

YOUR CHILDREN'S FUTURE

BEGINS TODAY

Discover how you can help your children grow with educational software from Opportunities for Learning. Write for your FREE catalog today!

OPPORTUNITIES FOR LEARNING, INC.
8950 Lurline Ave., Dept. L62
Chatsworth, CA 91311
(213) 341-2535

CIRCLE 197 ON READER SERVICE CARD

■ DKCS ■ DKCS ■ DKCS ■ DKCS ■ DKCS ■ DKCS ■ DKCS ■

APPLE II+ SOFTWARE from DKCS

☐ Applesoft* Subroutines & Extres . . . $75.00
Over 140 subroutines: print editing, conversions (English/metric, Gregorian/Julian, decimal/hex), array sorts, times square, and MORE!

☐ Applesoft* Program Generator $85.00
Create your own customized programs to maintain a data base, control the screen's construction, and, if you want, modify the program after it's generated

☐ M/L Utility Pac 1 . . . . . $45.00
Three programs let you:
1) Display memory contents in internal and display formats
2) Display/print non-protected disc files in internal and display formats
3) Alphabetize and rewrite disc VTOC

FREE with all orders: M/L routine to display free and used sectors on a disc.
(All the above raquire Apple II+, DOS 3.3, 48K. Add 7% New York State Sales Tax if ordering from within New York State)

Send check or money order payable in U.S. funds to

DK Computer Systems, Inc.
P.O. Box 0035
North Tonawanda, New York 14120

I'm interested. Please send the items I've checked above to

Name _____
Address _____
City _____
State _____ Zip _____

My check/money order is enclosed

*Apple® and Applesoft® are registered trademarks of Apple Computer, Inc

■ DKCS ■ DKCS ■ DKCS ■ DKCS ■ DKCS ■ DKCS ■ DKCS ■

CIRCLE 153 ON READER SERVICE CARD

double wide typeface: this is invoked with CHR$(14) with *no* escape code. Similarly, the Top of Form character (CHR$(12)) must travel alone. The documentation does not make this terribly clear, but there it is. Lines 4700-6000 present all the codes for typefaces and line spacing for the NEC.

The Long Form

The second (Listing 2), long version of this formatter has some extremely pleasant features added to it, and it should be emphasized again that both of these programs lend themselves to customization to other printers and even other computers (heaven forbid).

With this program it is possible to take full advantage of the extended character set that the NEC 8023A provides. This printer will print, for example, all digits from 0 to 9 as superscripts. It is therefore possible, in theory, to print attractive mathematical formulas.

The problem is always that what you see on the display is not necessarily what is printed to the printer; this can add extra confusion to an already complicated output line. In this program, a number to be superscripted is preceded by a tilde (CHR$(126)). Being able to view the number to be superscripted makes it much easier to proofread a page of formulas on the screen and is obviously more meaningful than random, unusual characters. Because the program allows superscripts of any size, it can also be used for simple footnoting.

I have long been bothered by the fact that the IBM and the NEC printer have completely different assignments for the extended character set, so even if there are characters common to both sets, it is difficult to do things like design forms on the display. This problem is addressed in the long version of the formatting program, which will correctly translate on-screen characters to the corresponding NEC extended ASCII code.

The translating table works perfectly for characters that are identical (Greek letters and some math symbols for example). There are characters which are found in the IBM set which must be composed from symbols in the NEC set—some of the graphic symbols and foreign letters for example. This was done by working out the sequence of character codes for the composed symbol. The character é is made up of three character codes: CHR$(101) for the e, a CHR$(8) for a backspace, and CHR$(44) for the accent mark.

Some characters in the IBM set cannot be done with the NEC, but surprisingly, most of them can be built with a little twiddling. In some cases, the composed character is not exactly equivalent, and you may prefer some other representation than the one output by this program.

The translating table is set up as a 127 × 4 array and can thus contain codes for 127 characters composed of up to four keystrokes each. If a character code greater than ASCII 127 is found in the file, the program routes to the conversion routine in line 12000.

Since it isn't possible to have the array begin with a subscript of 128, the first line of the subroutine subtracts 127 from the ASCII code value to find the corresponding row. Thus the character é, which in IBM ASCII is CHR$(130), is found in row 3. The DATA statement on line 15050, will, if carefully dissected by fours, will show the third set of data to be 131, 8, 39, 0. The routine then prints all these characters to the printer and, voilà, what you see when you enter an é in your file is actually what you get on the printer. For those characters for which there was no hope of possible correspondence between the NEC and the IBM, the data table simply contains four zeroes; you can make up your own characters and insert them as you please. Naturally, if you own a different printer, you will have to produce a different data table but the principle still applies.

One note with this program: the NEC will only recognize a backspace character when in the incremental mode (the default is the logic seeking mode). This means that instead of seeking the shortest distance to the next character, the printhead automatically returns to the lefthand margin after receiving a carriage return. Printing is therefore unidirectional and it takes about twice as long as usual to print out a file.

If you do not intend to use any of the composed characters which contain a backspace and prefer a more energetic printing pace, remove line 553. The program, by the way, has not been optimized for speed in any way and I suggest that some care be taken if you intend to use it. In its present condition, with all the REM statements and long variable names, it takes forever to initialize.

Vertical Tabbing

Another peculiarity of the NEC was brought to my attention by John Widman. The vertical form unit (VFU), which allows vertical tabbing for printing forms, will not load correctly unless the propensity of Basic to add the extra lf/cr after 80 characters is defeated with the following statement:

```
WIDTH ''LPT1:'', 255
```

I know, I promised something on the 8087 and the p-system this month but what with the packing and yard sale and all of the other details that go into relocation, not to mention the new game from Funtastic, there just wasn't time to do that too. Next month for almost sure and while I am on the subject of next month, if there are topics you would like to see in this column, please let me know.

I have been trying to strike a balance between reviews and more generally applicable topics, while still addressing less recognized systems. This philosophy is intended to enlighten the novice, but keep the more advanced user attentive. An excoriating or approving letter will let me know if the novices are bewildered and the rest of the audience fast asleep.

"The last electrical storm did quite a bit of damage. We fixed the hardware that saps the life-force from half the planet at the price we quoted you. The section that controls your living dead, however, has to be extra. And...if you don't mind my saying so, sir, this is quite *a piece of programming."*

Firm Mentioned In This Column
Ben Torres Ribbon Service
416 East State St.
Redlands, CA 92373 □

Listing 1.

```
10 '      <<<<<<  FORMAT PROGRAM FOR NEC 8023A PRINTER  >>>>>
20 '                    SUSAN GLEWETT-COLE
100 '
101 '
200 '                 <<<<<  INSTRUCTIONS  >>>>>
210 '
220 ' Printer codes may be imbedded into any text file as follows:
230 '   1.  codes must be enclosed in square brackets
240 '   2.  each code must be enclosed to separate brackets
250 '   3.  to cancel a code, simply precede the code with a minus sign
280 '   4.  codes may be placed anywhere on a line
265 '   5.  codes may be in upper or lower case
266 '   6.  left margin may be one or two digits
267 '   7.  variable line spacing may be one or two digits
270 '
275 '
280 '                  EXAMPLES
282 '
290 '          [b]    turns on bold face
295 '          [c]    turns on condensed face
300 '          [p]    turns on proportional face
310 '          [e]    turns on elite face
320 '          [u]    turns on underlieing
330 '          [d]    turns on double wide printing
340 '          [t]    print's the 'top of form' command
350 '          [e]    turns on pica face
360 '          [lxx]  sets left margin at xx
370 '          [lxx]  sets line spacing to xx/144
380 '          [l/8]  sets line spacing to 8 per inch
390 '          [l/8]  sets line spacing to 8 per inch
400 '          [-c]   cancels condensed face (pica is the default)
490 '
495 '-----------------------------------------------------------
499 '
500 '              <<<<<<      INITIALIZE      >>>>>>
520 '
525 BLANK$=SPACE$(30)
530 ESC$=CHR$(27)
535 CLS
537 LINES = 4                          'counter for page length
538 TRUE = -1:FALSE = 0
540 COLOR 2,0                          'green letters/black bkrnd
545 WIDTH "LPT1:",255                  'defeat extra cr/lf
550 ON ERROR GOTO 6200
800 '
798 '-----------------------------------------------------------
799 '
800 '              <<<<<<     GET THE FILE NAME      >>>>>>
801 '
820 LOCATE 11,41:PRINT BLANK$;
830 LOCATE 11,25:LINE INPUT;"ENTER FILE NAME:  ";FILE$
835 OPEN FILE$ FOR INPUT AS #1
837 OPEN "LPT1:" AS #2
838 '
840 '-----------------------------------------------------------
842 '
845 '              <<<<<<     GET OTHER CHOICES      >>>>>>
846 '
850 LOCATE 13,25:LINE INPUT;"SKIP PERFORATIONS? (Y/N)  ";AN$
860 IF AN$="Y" OR AN$="y" THEN SKIP = TRUE ELSE SKIP = FALSE
870 IF NOT SKIP THEN GOTO 1000
880 LOCATE 15,25:  PRINT"<------ PLACE TOP OF FORM UNDER PAPER BAIL"
890 LOCATE 18, 25: PRINT "<<<<<< THEN PRESS ANY KEY TO CONTINUE"
895 IF INKEY$="" THEN 895
900 FOR X= 1 TO 4:PRINT #2,CHR$(10):NEXT                '4 blank lines at top
937 '
940 '-----------------------------------------------------------
941 '
1000 '              <<<<<<     GET EACH CHARACTER     >>>>>>
1020 '
1030 WHILE NOT EOF(1)
1060     CHAR$=INPUT$(1,#1)
1080     IF CHAR$="[" THEN GOSUB 4000  ELSE PRINT #2,CHAR$;
1090     IF CHAR$= CHR$(13) THEN LINES = LINES + 1
2000 IF LINES = 58 AND SKIP = TRUE THEN GOSUB 8000
2050 WEND
2051 '
3000 '-----------------------------------------------------------
3040 '
3050 PRINT "ALL DONE"
3060 END
```


apple® IIe

64K SYSTEM . LIST $1995

CALL FOR LOW PRICE

BRODERBUND
Choplifter $23
Star Blazer $22
Davids Midnight $23
Apple Panic $20
Alien Rain $17
Arcade Machine $41
CONTINENTAL
Home Accountant $52
1st Class Mail $53
DATAMOST
Snack Attack $21
Swashbuckler $23
EDUWARE
Spelling Bee w/Read $27
Alg. 1, 2 or 3 ..... $27
Randeroue $27
Prisoner II $23
HAYDEN SOFTWARE
Sargon II $25
Piperitar $95
INFOCOM
Zork I, II or III $27
Starcross $27
Deadline $34
In-SOFT
Graforth II $50
Electric Duet $20
LOTUS
Exec. Brief Sys. $126
MICROSOFT
Basic Compiler $270
Multiplan $190
Olympic Decathalon $23
MUSE
Robot War $27
Castle Wolfenstein $20
PENGUIN
Graphic Magician $42
Comp. Graphics Sys. $49
Special Effects $29
ON LINE
Screenwriter $89
Wiz & Princess $22
Mystery House $17
Time Zone $85
Marauder $24
Frogger $23
Cannonball Blitz $23
Screenwriter Prof. $135

QUALITY
Bag of Tricks $27
Apple Mech Thievas $23
SENSIBLE SOFTWARE
Sensible Speller $85
Super Disk Copy III $21
Multi Disk Catalog $18
SIRTECH
Wizardry $35
Knight of Dia $24
SOFTWARE PUBLISH.
PFS: Report ..... $87)
PFS: Filing $87
PFS: Graph $87
SPINNAKER
Snooper Troops # $29
Snooper Troops #2 ..... $29
Story Machine $23
Face Maker $23
STONEWARE
D.B. Master $158
D.B. Master Util #1 ..... $70
Graphics Proc. Sys. $48
STRATEGIC SIM.
Computer Baseball $27
Cytron Masters $27
Guadalcanal $42
Galactic Gladiators $27
Battle of Shiloh $27
Tigers In Snow $27
Cosmic Balance $27
Computer Ambush $27
SUBLOGIC
Flight Simulator $25
Space Viking $34
Saturn Navigator $24
SYNERGISTIC
Alien Rain $27
Global Prog. Line Ed. $44
VISICORP
Visiterm $72
Visicalc 3.3 ..... $175
MISCELLANEOUS
Bandits $23
Human Fly $21
Master Type $27
New Step by Step $57
Sam (w/DAC) $83
Ultima $27
Zoom Graphics $27

GEMINI 10X . . $289
GORILLA $199

CITOH
Prowriter $345
Prowriter II $629
Starwriter $1149
Printmaster $1448
NEC
8023 A-C $409
3510 ..... $1375
3530 ..... $1579
3550 ..... $1779
7710/7730 ..... $1998

AMDEK
Color I $289
V300 ..... $139
V300A $149
Color II $449

HAYES
Smartmodem $209
Smartmodem 1200 ..... $498
Micromodem II $259

PROWRITER . $345
SMITH TPI . . . $488

SILVER REED P . . . $669
QUME 11/40 + . . . $1299
OKI-DATA
Microline 82A $398
Microline 83A $638
Microline 84P $958
Microline 92 ..... $488
Microlina 93 ..... $858
DIABLO
630R $939
630R $1719

NEC
GRN (JB1260) $115
AMB (JB1201) $155
Color Composita $298
RGB Color $598

NOVATION
J-Cat $99
Appie Cat II $259
D-Cat $149

COSMIC COMPUTERS

727 BREA CANYON RD., SUITE 16
WALNUT, CA 91789

(800) 626-7642

PLEASE FOR ORDERS ONLY
SORRY, NO COD'S

(714) 594-5204

FOR TECHNICAL INFO, ORDER INQUIRIES, OR FOR CALIFORNIA ORDERS

Add $2.00 shipping per software order in continental U.S. Add $5.00 shipping per software order for AK, HI, FPO-APO. Add $10.00 or 15% (whichever is greater) per software order for non-U.S.. Call for cost of hardware shipping. Calif. residents add 6½% sales tax. Cashiers checks or money orders filled within 24 hours for items in stock. Personal checks require 4 weeks to clear. MasterCard and Visa OK for software only within continental U.S.; add 3% surcharge.

COMMODORE

CBM 64 . . . . . CALL
1541 DISK DRIVE . . . $239

1701 Color Monitor . . . $255
1525 Printer . . . $230
1520 Color Plr . . . $169
Card ? (Intc) . . . $60
Light Pen . . . $29

1530 Datasette . . . $59
1600 Modem . . . $59
1650 Modem . . . $158
CMB 64 Hot Golds . . . $18
The Connection (Intc) . . . $85

64 SOFTWARE 64

ACCESS SOFTWARE
Neutral Zone (C/D) . . . $26
Spitfire Master (/D) . . . $27

BATTERIES INCLUDED
Delphis Oracle(D) . . . 114
Paper Clip(D) . . . 99

DATA 20
Video Pak 80 . . . $139
Z80 Video Pak . . . $229

EN-TECH
Finance Calc 64 . . . $34
Data Base 64 . . . $56
Invoice Ease 64 . . . $56

EPYX
Temple of APS (D) . . . $27
Super Reach. APS (D) . . . $14
Jumpman (D) . . . $27

HES
HES Modem . . . $59
6502 Prof. Dev. Sys.(C) . . . $22
Hesmon 64 (R) . . . $27
Turtle Graphics II (R) . . . $41
Heswriter 64 (R) . . . $32
Gridrunner (R) . . . $27
Retroball (R) . . . $27

JIM SAM
Mini-Jini (R) . . . $75

M-SOFT
M-Fila (D) . . . $89

ON-LINE
Frogger (D) . . . $23
Jawbreaker (D) . . . $20

PROFESS. SOFTWARE
Wordpro 3 + /64 (D) . . . $68

QUICK BROWN FOX
Prof Word Proc. (R) . . . $50

RAINBOW
Writers Assistant . . . $95
Spreadsheet Assist . . . $95
File Assistant . . . $95

TOTL
Text 2.6 (C) $32 (D) $34
Label 2.6 (C) $15 (D) $17
Time Manager 2.6 (D) . . . $27
Time Manager 2.6 (D) . . . $27
Reserch Assist. 2.0 (C) . . . $24
Reserch Assist. 2.0 (D) . . . $27

SOUTHERN SOLUTIONS
Bill Payer(A/P) . . . 68
Business Man(G/L) . . . 68
Paymaster(Payroll) . . . 68
Bill Collector(A/R) . . . 68
Widget(inventory) . . . 68

SPINNAKER
Snooper Troops 1 (D) . . . $29
Facemaker (D) . . . $22
Kindercomp (D) . . . $20
Fun Dodale (D) . . . $20
Most Amaz. Thing (D) . . . $27

SYNAPSE
Fort Apocalypse (C/D) . . . $23
Survivor (C/D) . . . $23
Firebs (C/D) . . . $23
Pharoh's Curse (C/D) . . . $23
Protector II (D) . . . $24
Morgal (D) . . . $23
Shamus (D) . . . $23

TAYLORMADE
Touch Typing Tutor 3.0 (D) . . . $21

VICTORY
Annihilator (C/D) . . . $18
Kongo Kong (C/D) . . . $18
Trek (C/D) . . . $14

CIRCLE 143 ON READER SERVICE CARD

It's Simple. . . **CALL AND SAVE MONEY**

1-800-841-0860

CONVENIENT ORDER ENTRY
GA. INFO. 912-377-7120

"Telemarketing Works For You"

FRANKLIN
ACE 1000 COMPUTER
ACE 1200 COMPUTER
FROM **$CALL**

Commodore
COMPUTERS
MONITORS, PRINTERS & DRIVES
FROM **$CALL**

TRS-80 COMPUTERS

	DISCOUNT PRICED FROM
MODEL 4 TRS-80	*$809
MODEL 12 TRS-80	*$2639
MODEL 16 TRS-80	*$3998
MODEL 100 TRS-80	*$677
MC-10 TRS-80	*$99
COLOR COMPUTER	*CALL

WE SELL THE COMPLETE LINE OF TRS-80 COMPUTERS AND ACCESSORIES

PURE RADIO SHACK EQUIPMENT

IBM COMPATIBLES
YOUR CHOICE
EAGLE PC
COLUMBIA PC
CORONA PC
$CALL

Hayes®
MODEMS
FROM **$239**
MICRO MODEM I
SMART MODEM 300
SMART MODEM 1200

TRS-80 COMPUTERS

MICRO COLOR **$99**
MODEL 100 FROM **$677**

Novation

MODEMS
FROM *$119
•J-CAT •D-CAT
•CAT •AUTO CAT
•SMART CAT •APPLE CAT

EPSON PRINTERS
FROM **$CALL**
FX-80 ..... SAVE
RX-80 ..... SAVE
FX-100 ..... SAVE

TRS-80 PRINTERS
COMPLETE LINE FROM *$199

SMITH CORONA
TP-I DAISY WHEEL PRINTER
FROM **$CALL**

STAR PRINTERS
FROM *$309
GEMINI
10X & 15

C. Itoh
PROWRITER
8510 ..... *$39
NEW1
8600 ..... *CALL

OKIDATA PRINTERS
FROM **$CALL**
MICROLINE SERIES
•83A
•84P •92P •93P
PACEMARK 2350P

DATA FLEX
APPLICATIONS DATA BASE BY DATA ACCESS
*CALL

COMREX
AMDEK
$CALL

NOTICE
ALL PRODUCTS WE SELL ARE BRAND NEW AND COVERED BY THE MANUFACTURER'S SPECIFIC WARRANTIES. COPIES AVAILABLE UPON REQUEST.
WE DO NOT SELL ANY USED, RECONDITIONED, FOREIGN OR INFERIOR MODIFIED EQUIPMENT.
PRICES AND PRODUCTS SUBJECT TO CHANGE WITHOUT NOTICE.

PRINTER CARDS AND CABLES
GRAPPLER+

QUADRAM
•IBM BOARDS
•MICROFAZERS
•APPLE BOARDS
*CALL

FREE
UPON REQUEST
•DISCOUNT PRICE LIST & INFORMATION KIT
WRITE
MICRO MANAGEMENT SYSTEMS
TELEMARKET DEPT. # 3

NEW PRODUCTS
*CALL

Verbatim
DATALIFE DISKETTES
$CALL

Since 1978
- REPUTATION BACKED BY YEARS OF EXPERIENCE
- PIONEER IN DIRECT TO CONSUMER SALES OF MICRO COMPUTERS AND ELECTRONICS
- MILLIONS OF DOLLARS IN SALES OVER THE YEARS
- TENS OF THOUSANDS OF CUSTOMERS
- HONEST
- RELIABLE
- LARGE INVENTORY
- NAME BRAND PRODUCTS

Micro Management Systems, Inc.
2803 Thomasville Road East
Cairo, Georgia 31728
(912) 377-7120

DISCOUNT PRICES

BUY DIRECT
TELEMARKET DEPT. 3

CIRCLE 187 ON READER SERVICE CARD

IBM images, continued...

```
3995 '**********************************************************************
3996 '**********************************************************************
3997 '
3998 '          <<<<<<      GET PRINTER CODES     >>>>>>
3999 '
4000 CODES=""                                    'initialize CODES
4050 CHAR$=INPUT$(1,#1)
4060 WHILE CHAR$ <> "]"
4100    CODES=CODES+CHAR$:CHAR$=INPUT$(1,#1)    'get the whole code
4200 WEND
4500 GOSUB 4700                                 'send code to printer
4600 RETURN
4610 '
4696 '**********************************************************************
4697 '
4698 '          <<<<<<     SEND CODES TO PRINTER     >>>>>>
4699 '
4700 IF CODES="L" OR CODES="I" THEN PRINT #2, CHR$(12);      'top of form
4703 IF MID$(CODES,1) <> "@" AND MID$(CODES,1) <> "d"
        THEN PRINT #2,CHR$(27);
4705 IF LEFT$(CODES,1)="-" THEN GOTO 4900                    'cancel code
4710 IF CODES="d" OR CODES="D" THEN PRINT #2, CHR$(14);      'double wide
4720 IF CODES="c" OR CODES="C" THEN PRINT #2, CHR$(81);      'condensed
4730 IF CODES="p" OR CODES="P" THEN PRINT #2, CHR$(80);      'preportional
4740 IF CODES="e" OR CODES="E" THEN PRINT #2, CHR$(69);      'elite
4750 IF CODES="b" OR CODES="B" THEN PRINT #2, CHR$(33);      'bold
4780 IF CODES="s" OR CODES="S" THEN PRINT #2, CHR$(78);      'pica
4790 IF CODES="1/8" THEN PRINT #2, CHR$(66);                 '8 lpi
4800 IF CODES="1/6" THEN PRINT #2, CHR$(65);                 '6 lpi
4830 IF LEFT$(CODES,1)="L" OR LEFT$(CODES,1)="l" THEN 4960   'do left margin
4850 IF LEFT$(CODES,1)="x" OR LEFT$(CODES,1)="X" THEN 4980   'do line spcng
4860 RETURN
4862 '
4885 '**********************************************************************
4886 '
4887 '          <<<<<  CANCEL CODES  >>>>>
4889 '
4900 IF CODES="-d" OR CODES="-D" THEN PRINT #2, CHR$(15);     'cancel double
4910 IF CODES="-p" OR CODES="-P" THEN PRINT #2, CHR$(78);     'return to pica
4920 IF CODES="-e" OR CODES="-E" THEN PRINT #2, CHR$(78);     'return to pica
4930 IF CODES="-b" OR CODES="-B" THEN PRINT #2, CHR$(34);     'cancel bold
4940 IF CODES="-u" OR CODES="-U" THEN PRINT #2, CHR$(89);     'cancel underline
4949 RETURN
4950 '
4954 '**********************************************************************
4956 '
4957 '          <<<<<  SET LEFT MARGIN   >>>>>
4958 '
4960 IF LEN(CODES)=2 THEN PRINT #2, CHR$(76);"00";:RIGHT$(CODES,1);
4970 IF LEN(CODES)=3 THEN PRINT #2, CHR$(76);"0";RIGHT$(CODES,2);
4975 RETURN
4976 '
4977 '**********************************************************************
4978 '          <<<<<  SET LINE SPACING   >>>>>
4979 '
4980 IF LEN(CODES)=2 THEN PRINT #2, CHR$(84);"0";RIGHT$(CODES,1);
4990 IF LEN(CODES)=3 THEN PRINT #2, CHR$(84);RIGHT$(CODES,2);
4995 RETURN
4999 '
6000 '**********************************************************************
6050 '
6100 '          <<<<<<  ERROR TRAPPING ROUTINES  >>>>>>
6101 '
6200 LOCATE 23,30:COLOR 0,2
6300 IF ERR=53 THEN PRINT "file not found";
6400 IF ERR=71 THEN PRINT "disk not ready";
6500 IF ERR=25 THEN PRINT "turn on the printer";
6600 IF ERR=27 THEN PRINT "out of paper";
6700 COLOR 2,0
6800 IF ERR=53 OR ERR=71 THEN RESUME 540
6900 IF ERR=24 OR ERR=25 OR ERR=27 THEN WAIT &H379,32  'wait for select signal
7000 RESUME 1060
7995 '
7996 '**********************************************************************
7997 '          <<<<<<     SKIP TO NEXT PAGE     >>>>>>
7998 '
8000 FOR X = 1 TO 10
8010    PRINT #2,CHR$(10)
8020 NEXT X
8030 LINES = 4                                 'reset lines counter
8040 RETURN
```


Epson, OKI, IDS, NEC, Diablo, Qume

ACOUSTIC ENCLOSURES

- Reduces Noise Up to 90%
- Heavy Duty Acrylic Cover
- Bottom Feed Capability
- Woodgrain Finish

Micro Printercenter™

Dealer & Ordering Info

800-343-4311

Master Charge and Visa Accepted
Shipping & Handling Charges Additional

CAB-TEK, Inc.

Riverside St. Nashua, NH 03062
CIVILIZING COMPUTERS

MPC I $99 (MX 80) MPC II $129 (OKI82)
MPC III $179 (83A, MX100) MPC IV $199 (Daisy Printer)
Power Control & Ventilation $80
Paper Rack $30 Bottom Feed Brackets $30
MPC I SHOWN

CIRCLE 125 ON READER SERVICE CARD

FREE CATALOG

	1-9 bx	10+ bx
BASF Disks, 5¼", 10/bx		
SSDD, soft sectored	21.90	19.90
DSDD, soft sectored	30.90	28.90

Lifetime Guarantee, Certified, Hub-ringed
FREE PLASTIC CASE WITH EACH BOX

APPLE

Micromodem II w/term prog	289.00
Keytronic Keyboard	240.00
Micro-Sci: A2 Disk Drive- w/cont	335.00
A2 Disk Drive, add-on	275.00
Microsoft Softcard	240.00
Premium Pack	495.00
Pkaso Printer Interface	145.00
Videoterm, 80 col. card	235.00
System Saver Fan	87.50

IBM

Ampex 210A, 13" Amber Monitor	185.00
STB SRIO 64K mem, clock & I/O	350.00
Keytronic Keyboard	215.00
Smartmodem 300 (RS-232)	225.00

ATARI

8 Key 400 Keyboard	39.00
Percom 35DD Disk Drive w/cont	550.00
Disk Drive Add-on	350.00

RIBBONS

Epson 7000	Dz 87.00
Okidata 80, 82, 83, 92, 93	Dz 33.00
Qume 3, 5 Multistrike	Dz 42.00
NEC 5500, 7700 Multistrike	Dz 81.50

ACCESSORIES

Lemon Surge Protector	43.00
Lime Surge Protector	85.00
Head Cleaning Kit, 5¼"	18.95

☐ SEND ME YOUR PRICE LIST
☐ PAYMENT ENCLOSED $_____
Add 3% Shipping ($3 minimum). Texas residents add 5% sales tax
Two week delay on personal checks

☐ CHARGE MY: ☐ MasterCard ☐ Visa

Card No. _____ Exp. Date _____

Signature _____

Name _____
(please print full name)

Address _____ Apt. _____

City _____ State _____ Zip _____

214-644-2611

Software t' Boot
2116 E. Arapaho #600
Richardson, Tx 75081 10C

CIRCLE 240 ON READER SERVICE CARD

IBM images, continued...

Listing 2.

```
10 '       <<<<<<  FORMAT PROGRAM FOR NEC 8023A PRINTER  >>>>>
20 '                    SUSAN GLINERT-COLE
100 '
101 '
200 '              <<<<<  INSTRUCTIONS  >>>>>
210 '
220 ' Printer codes may be imbedded into any text file as follows:
230 '  1.  codes must be enclosed in square brackets
240 '  2.  each code must be enclosed in separate brackets
250 '  3.  to cancel a code, simply precede the code with a minus sign
260 '  4.  codes may be placed anywhere on a line
265 '  5.  codes may be in upper or lower case
266 '  6.  left margin may be one or two digits
267 '  7.  variable line spacing may be one or two digits
268 '  8.  superscripts may be invoked by preceding them with a '  '
270 '
275 '
280 '                    EXAMPLES
282 '
290 '          [b]    turns on bold face
295 '          [c]    turns on condensed face
300 '          [p]    turns on proportional face
310 '          [e]    turns on elite face
320 '          [u]    turns on underlining
330 '          [d]    turns on double wide printing
340 '          [t]    prints a 'top of form' command
350 '          [n]    turns on pica face
360 '          [Lnn]  sets left margin at nn
370 '          [Xnn]  sets line spacing to nn/144
380 '          [1/8]  sets line spacing to 6 per inch
390 '          [1/9]  sets line spacing to 8 per inch
400 '          [-c]   cancels condensed face (pica is the default)
405 '          I2  5  prints I2 to the fifth power
490 '
495 '
498 '-----------------------------------------------------------------
499 '
500 '              <<<<<<          INITIALIZE          >>>>>>
520 '
530 ESC$=CHR$(27)
538 CLS
537 LINES = 4                                  'counter for page length
538 TRUE = -1:FALSE = 0
540 COLOR 2,0                                  'green letters/black bkrnd
545 WIDTH "LPT1:",255                          'defeat extra cr/lf
550 ON ERROR GOTO 8200
551 '
552 ' put printer in incremental mode to enable backspacing
553 LPRINT ESC$;CHR$(91);
560 '
565 DIM POWER(10)                              'superscript table
570 FOR P = 1 TO 10
580   READ POWER(P)
590 NEXT P
595 '
600 '
700 '
708 DIM TABLE  (127,4)
710 FOR ROW = 1 TO 127
720   FOR COL = 1 TO 4
730     READ TABLE (ROW,COL)
740   NEXT COL
750 NEXT ROW
751 '
752 ON ERROR GOTO 8200
798 '-----------------------------------------------------------------
799 '
800 '              <<<<<<        GET THE FILE NAME       >>>>>>
801 '
820 LOCATE 11,41:PRINT BLANK$;
830 LOCATE 11,25:LINE INPUT;"ENTER FILE NAME:  ";FILE$
835 OPEN FILES FOR INPUT 45 #1
837 OPEN "LPT1:" 45 #2
838 '
840 '-----------------------------------------------------------------
842 '
845 '              <<<<<<        GET OTHER CHOICES       >>>>>>
848 '
850 LOCATE 13,25:LINE INPUT;"SKIP PERFORATIONS? (Y/N)  ";ANS
860 IF ANS="Y" OR ANS="y" THEN SKIP = TRUE ELSE SKIP = FALSE
870 IF NOT SKIP THEN GOTO 1000
880 LOCATE 18,25:  PRINT"======= PLACE TOP OF FORM UNDER PAPER BAIL"
890 LOCATE 19, 25: PRINT "======= THEN PRESS ANY KEY TO CONTINUE"
895 IF INKEY$="" THEN 895
900 FOR X= 1 TO 4:PRINT #2,CHR$(10):NEXT                '4 blank lines at top
937 '
940 '-----------------------------------------------------------------
941 '
1000 '                 <<<<<<          GET EACH CHARACTER       >>>>>>
1020 '
1030 WHILE NOT EOF(1)
1040   CHAR$= INPUT$(1,#1)
1050   IF CHAR$ <> "[" AND CHAR$ <> "^" AND ASC(CHAR$) <120
          THEN  PRINT #2, CHAR$;:GOTO 2010
1060   IF CHAR$ = "^" THEN GOSUB 10000                    'do superscripts
1079   IF 45<(CHAR$) >127 THEN GOSUB 12900                ' do tabs
1900   IF CHAR$ = "[" THEN GOSUB 6000                     'do typefaces
2090 '
2919   IF CHAR$= CHR$(13) THEN LINES = LINES + 1          'increment line #
2020   IF LINES = 60 AND SKIP = TRUE THEN GOSUB 8000      'do top of form
2041 '
2090 WEND
3000 '-----------------------------------------------------------------
3040 '
3080 PRINT "ALL DONE"
3060 END
3995 '-----------------------------------------------------------------
3996 '
3997 '
3998 '                 <<<<<<          GET PRINTED CODES       >>>>>>
3999 '                                                          'initialize CODE$
4000 CODE$=""
4020 CHAR$=INPUT$(1,#1)
4080 WHILE CHAR$ <> "]"
4100   CODE$=CODE$+CHAR$:GOTO 4050                          'get the whole code
4299 WEND
4500 GOSUB 4700                                             'send code to printer
4600 RETURN
4619 '
4696 '-----------------------------------------------------------------
4697 '
4699 '                 <<<<<<          SEND CODES TO PRINTER       >>>>>>
4699 '
4700 IF CODE$="L" OR CODE$="T" THEN PRINT #2, CHR$(12);       'top of form
4703 IF RIGHT$(CODE$,1) <> "D" AGO RIGHT$(CODE$,1) <> "d"
          THEN PRINT #2, ESC$;
4705 IF LEFT$(CODE$,1)="-" THEN GOTO 4900                     'cancel code
4710 IF CODE$="d" OR CODE$="D" THEN PRINT #2, CHR$(14);       'double wide
4720 IF CODE$="c" OR CODE$="C" THEN PRINT #2, CHR$(15);       'condensed
4730 IF CODE$="p" OR CODE$="P" THEN PRINT #2, CHR$(18);       'proportional
4740 IF CODE$="e" OR CODE$="E" THEN PRINT #2, CHR$(69);       'elite
4779 IF CODE$="b" OR CODE$="B" THEN PRINT #2, CHR$(33);       'bold
4780 IF CODE$="u" OR CODE$="U" THEN PRINT #2, CHR$(78);       'pica
4790 IF CODE$="1/8" THEN PRINT #2, CHR$(66);                  '8 lpi
4800 IF CODE$="1/6" THEN PRINT #2, CHR$(65);                  '6 lpi
4830 IF LEFT$(CODE$,1)="L" OR LEFT$(CODE$,1)="l" THEN 4960    'do left margin
4888 IF LEFT$(CODE$,1)="x" OR LEFT$(CODE$,1)="X" THEN 4908    'do line spcng
4869 RETURN
4862 '
4865 '-----------------------------------------------------------------
4886 '
4887 '              <<<<<  CANCEL CODES   >>>>>
4889 '
4900 IF CODE$="-d" OR CODE$="-D" THEN PRINT #2, CHR$(15);      'cancel double
4810 IF CODE$="-p" OR CODE$="-P" THEN PRINT #2, CHR$(70);      'return to pica
4820 IF CODE$="-c" OR CODE$="-C" THEN PRINT #2, CHR$(70);      'return to pica
4830 IF CODE$="-b" OR CODE$="-B" THEN PRINT #2, CHR$(34);      'cancel bold
4940 IF CODE$="-u" OR CODE$="-U" THEN PRINT #2, CHR$(89);      'cancel underline
4949 RETURN
4950 '
4954 '-----------------------------------------------------------------
4956 '
4957 '              <<<<<  SET LEFT MARGIN    >>>>>
4958 '
4960 IF LEN(CODE$)=2 THEN PRINT #2, CHR$(76);"0";RIGHT$(CODE$,1);
4879 IF LEN(CODE$)=3 THEN PRINT #2, CHR$(76);"0";RIGHT$(CODE$,2);
4875 RETURN
4876 '
4877 '-----------------------------------------------------------------
4879 '              <<<<<  SET LINE SPACING   >>>>>
4879 '
4980 IF LEN(CODE$)=2 THEN PRINT #2, CHR$(84);"0";RIGHT$(CODE$,1);
4990 IF LEN(CODE$)=3 THEN PRINT #2, CHR$(84);RIGHT$(CODE$,2);
4995 RETURN
4999 '
4000 '-----------------------------------------------------------------
8008 '
8100 '                 <<<<<<  ERROR TRAPPING ROUTINES  >>>>>>
8101 '
8200 LOCATE 23,30:COLOR 0,2
8300 IF ERR=53 THEN PRINT "file not found";
8400 IF ERR=71 THEN PRINT "disk not ready";
8000 IF ERR=25 THEN PRINT "turn on the printer";
8000 IF ERR=27 THEN PRINT "out of paper";
8700 COLOR 2,0
8000 IF ERR=53 OR ERR=71 THEN RESUME 540
8900 IF ERR=24 OR ERR=25 OR ERR=27 THEN WAIT &H379,32   'wait for select signal
```

SNAVE SYSTEMS

WE Declare A PRICE WAR

We love to sell
Apples and Franklins
Call for the
Best Price

(we won't be undersold)

FRANKLIN
COMPUTER CORPORATION

We now carry:
IBM
Columbia
Commodore
Eagle
Northstar
Sharp
Toshiba

CALL FOR PRICE

apple

BE A SNAVER SAVER!

APPLE SOFTWARE

	list price	our price
AppleWriter IIe	$195	$159
Word Handler (new ver.)	195	117
Magic Window II	149	93.95
General Manager II	229	152
DB Master	229	152
DB Utility pak 1 or 2	129	89
Microsoft Multiplan (dos 3.3)	275	169
Screen Writer II	129	79.95
A Visi-Special Sale		
Visicalc	250	159
Visifile	250	177
Visidex	250	177
Visiplot	200	149
Visi Schedule	300	213
Visi trend/plot	300	213
PFS: file	125	86
PFS: Report	125	86
PFS: graph	125	86
Home Accountant	74.95	47.95
Locksmith 4.0	99	69.95
Choplifter	34.95	19.95
Zaxxon	39.95	25.95
Word Scrambler & Super Speller	19.95	12.95
Lancaster	29.95	15.95
Zork 1, 2, or 3	39.95	25.95

APPLE GOODIES

	list price	our price
Grappler +	$175	$114
Graphitti	125	96
Tymac Interface	140	87
Pkaso	175	127
TG Paddles	39.95	26.95
TG Joystick	59.95	40.95
TG Select-a-port	59.95	40.95
Kraft Joystick	64.95	39.95
Kraft Paddles	49.95	34.95
Microsoft Softcard	345	229
Softcard Plus	645	419
Videx Videoterm 80 col.	279	199
Ultraterm	379	277
A.L.S. CP/M Card	399	279
Z-Card II	169	133
System Saver	89.95	63.95
R.H. Super Fan II	74.95	58.95
Guardian Angel	595	459

PRINTERS

	list price	our price
C-ITOH		
Prowriter	595	363
Prowriter II	995	643
Starwriter	1895	1165
Printmaster	1995	1475
Star		
Gemini 10X special	499	293
Gemini 15	649	457
STS-80	199	169
Delta	please	call
Okidata		
ML-82	549	387
ML-83	899	619
ML-84P	1395	975
ML-92 (special)	699	493
ML-93	1249	853
Smith Corona		
TP-I	895	487
Tractor feed	149	119
Transtar		
Color-315 (color printer)	599	463
Others		
Gorilla printer	250	197
Epson		CALL
Diablo		and
NEC		SAVE

MONITORS

	list price	our price
Amdek		
Color I	379	287
Color I +	399	311
Color II (RGB)	529	409
Color III (RGB	479	359
Color IV (RGB)	1299	997
Video 300	179	137
Amber 300H	199	157
USI		
PI-1	149	117
PI-2	210	149
PI-3	249	147
PI-4	199	137
1400 C	399	289
Taxan		
Vision I (special)	399	267
Vision III	699	493
K9-12n	179	129
K9-12n-uy	189	137
Others		
BMC		call
Sakata		call

MODEMS

	list price	our price
Hayes		
Micromodem II (special)	379	257
Micromodem II w/term.	409	287
Smartmodem 300	289	203
Smartmodem 1200	699	493
Novation		
Applecat II	389	259
SSM		
AMC-300 w/source	325	239
ASID card & cable	149	119
Transend 1	89	66
Transend 2	149	109
Transend 3	275	198
AIO-2	225	159

DRIVES

	list price	our price
Rana		
Elite 1 (special)	379	259
Elite 2	649	447
Elite 3	849	559
w/controller		call
Micro-Sci		
A2 (special)	345	229
A40	379	269
A70	529	349
w/controller		call
Others		
Vista		call
Want Slim-line	375	269
Corvus		call

DISKS

(quantity discounts available) (box of 10)

Maxell	
MD1 s/s d/d	28.95
MD2 d/s d/d	41.95
Verbatim	
s/s d/d	25.95
d/s d/d	35.95
Dysan	
s/s d/d	37.95
d/s d/d	46.95
BASF	
s/s d/d	25.95
d/s d/d	34.50
Memorex	
s/s s/d	19.95
s/s d/d	21.95
Elephant	call
Wabash	call
OPUS	call

SNAVE SYSTEMS
Post Office Box 957
Niles, Illinois 60648-0957

312/966-4505

VISA
MasterCard

We accept VISA and MASTERCARD (Include card # and exp. date). Money Order, Certified Check, Personal Check (allow 10 days clearance). Add Only $2 for delivery, (hardware and foreign extra). Illinois residents add 6% sales tax (except on software). Prices and policies subject to change.

FREE Catalog

Apple, Apple IIe, Apple III, and Franklin are Registered Trademarks

CIRCLE 234 ON READER SERVICE CARD



rings...trs-80 strings...trs-8

Stephen B. Gray

At the fifty-sixth step on the TRS-80 stairway to personal computing, we take a quick look at the MC-10 Color Computer, seven PC-1 Pocket Computer programs from Radio Shack, the *Clean Slate* word processor from Sams, the *QWERTY 3.0* word processor from ScreenPlay and a short program for computing the day of the week.

A Little Brother

The TRS-80 MC-10, introduced in May, is also known as the TRS-80 Micro Color Computer because it takes up only about as much space as a 700-page novel, or about a sixth the space of the Color Computer. It weighs only 29.5 ounces (Figure 1).

The MC-10, which may come to be called the MiCoCo (or possibly the MicroCo) (*Not if we can help it! —Ed.*), doesn't replace the Color Computer, but supplements it. Priced at $119.95, the MC-10 is designed to compete with low-cost computers such as the Timex/Sinclair, and is "aimed primarily at first-time computer buyers," as the press release puts it. See the review elsewhere in this issue.

Seven PC-1 Packages

Radio Shack sent me seven cassette program packages for the PC-1 Pocket Computer. Four are useful (*Statistical Analysis, Engineering Math II, III,* and *IV*); one might help you make a few dollars at the track (*Horse Race Analyst*); one might be useful on the links (*Golf Scoring*); and one has rather limited applications (*Calendar*).

All seven packages include imprinted plastic keyboard overlays, and all the programs use prompts to simplify and speed up operations.

Calendar

For $19.95 you get four *Calendar* programs "to solve date-related problems." An overlay, which fits over the bottom left half of the keyboard, simplifies two of the programs.

With Cal I, you can enter any date, expressed as MM.DDYYYY, from 1900 to 2100, and the program first converts it to "Julian date," which here means the number of days from a date back in 4000 B.C. This is then easily converted by Cal I into the day of the year (February 23, 1982 is the 54th day of the year), how many days remain in the year (311), and which day of the week it is (Tuesday).

You can also enter a Julian date or day of the year and make any conversion you choose. Cal I also converts from Gregorian years to Chinese years, and vice versa, with the help of a chart. If you have the chart, however, you don't

Figure 1. The TRS-80 Micro Color Computer MC-10 has most of the features of the larger Color Computer at a sixth the size and less than half the price.

really need the conversion program. Most inscrutable.

Cal II relates to holidays. It tells you on which day Easter fell in 1982 (April 11) and lists the dates of 17 holidays for any given year, including President's Day.

Cal III relates dates to days of the week. It finds the number of days from one given date to another, the number of times a given day of the week occurs between two dates, the years in which a given date falls on a given weekday, and performs three more similar calculations.

Cal IV provides the dates of the new and full moon for a given month.

Although most of us have little or no use for such date programs, they could be of help in some financial and legal instances, for interest, contracts, and so forth.

Golf Scoring

The full name of this $14.95 package is *Golf Scoring & Handicapping*; it consists of four programs and an overlay.

Play "keeps track of your party's score and pars for each hole while you are actually on the course," the manual says. It keeps score for up to four players over as many as 18 holes. You can review scores for any hole, make corrections, and save data for an entire game on tape.

Score uses the data saved on tape from Play to print a complete scorecard for each game.

Stroke uses data from Play to figure the USGA stroke-controlled score for any player and game.

HDICAP figures your official USGA handicap, using data on your past performance stored on tape.

So you take your PC-1 to the clubhouse, plug in the printer/cassette interface and a tape-cassette recorder, and load Play (you could even do this earlier, at home). Enter the players' names and handicaps, then take the PC-1 around the course as you play, entering hole numbers and scores.

Back at the clubhouse, or later at home, you save the game data on tape. Or if you have everything with you, you can use Score to print out a scorecard right in the clubhouse to show the gang at the bar what a great game you played.

Horse Race Analyst

The subtitle of this $19.95 package is "Using the 5/10 System," which isn't explained in the manual. The overlay uses all 19 of the keys over which it fits, all 26 alphabetic keys are required for entering variables.

The Daily Racing Form past-performance data for each horse (distance, time, track condition, finish position, and so on) are entered, after which the PC-1 displays a computed score. The horse with the highest Horse Score in a race is the predicted winner, according to the manual. It adds, "We can't guarantee that this system will enable you to choose a winner. As with all systems, none are perfect." If it were, of course, the programmer would be at the track, rather than writing 5/10.

The manual provides information on how to improve predictions: one suggestion is to "eliminate horses whose finish positions in the last two races total more than 16 lengths behind."

Engineering Math II

This package, which contains three programs and two overlays, is $14.95.

Vector performs all common vector operations in 3D, in both Cartesian and polar coordinates. Chain operations are allowed, and the mode may be changed between polar and rectangular at any point during program execution.

Complex performs all common operations on complex numbers, including sines, cosines, arc sines, and arc cosines. Chain operations are allowed.

ADVMATH provides 24 common trig functions in degrees or radians, including arc hyperbolic cosecant. It also provides logs to any base and an exponentiation function that raises negative numbers to positive or integral negative powers.

Engineering Math III

This $10.95 package contains two programs and one overlay.

SIMEQ solves systems of up to nine linear equations for all unknowns. It can also complete a Gaussian reduction of matrices from 2-by-2 to 9-by-9.

PCALC solves common polynomial functions and calculus solutions for polynomials to the ninth order. It also evaluates the polynomial at any point, calculates an exact derivative at any point, calculates an exact integral between any two points, and searches for Newtonian roots.

Engineering Math IV

For $7.95 you get one program and an overlay. TRIANG provides solutions for the three common triangles and can also solve from three Cartesian coordinates. TRIANG provides for angles in degrees, radians or grads, calculates areas, and tests for equilateral, right, isosceles, obtuse, and scalene properties.

Statistical Analysis

A data-analysis package of six programs and three double-sided overlays costs a modest $24.95.

The six programs are Descriptive Statistics, Correlation and Regression, Analysis of Variants, Chi Square Analysis, Distributions (normal, t, F, X^2), and Multiple Regression.

Descriptive Statistics provides an overall picture of the data set, which can contain up to 130 values. Output from this program includes sample statistics (sample size, mean, sum, sum of squares, variance, and standard deviation) and unbiased estimates of population parameters (variance, standard deviation, and standard error of the mean).

Clean Slate

The two previous columns described the *Master Directory II* and *Superkeys* programs from Howard W. Sams & Co. Let's make it a trio with a look at *Clean Slate.*

Described by Sams as "more than a word processor," *Clean Slate* requires a Model I/III/4 with 32K of RAM, one disk drive, and a parallel or serial printer.

"It's not wise to lose to Sorceror!"

TRS-80 Strings, continued...

Before using *Clean Slate,* you enter configuration data such as which DOS you are using, whether your printer executes a backspace (most dot-matrix printers will not), and communications parameters such as the length of response delay (if you have the RS-232 interface). You do all this only once.

Then you enter a document name and the number of the disk drive that contains the old text or where you want to save the new one.

A few of the *Clean Slate* commands are like those of *Scripsit:* D for delete, I for insert, P for print. However, it is page-oriented, so the up and down arrows will move to the previous or next page on the display. There are many more editing commands, some of which may be unique, such as CLEAR/E to split a line in two at the cursor, CLEAR/C to center the current line, and so forth.

Clean Slate has many word processing functions not found in *Scripsit,* such as Ruler Mode (displays a ruler with a scale taken from the printer pitch value you entered), Justify Line (adds spaces to expand a single line to the right margin position), Vertical Tab Set, Word Count, and several dozen more.

Forms can be constructed by building a minimal portion with hyphens (for the horizontal lines) and exclamation marks (for the verticals), then duplicating it to assemble a much larger blank form.

The printing capability includes underlining, boldface, backspacing, page numbers, printing some pages but not others, headers and footers, and many others.

Using the APPEND function, you can load Basic programs, assembler source files, Fortran, and other compiler source codes into a *Clean Slate* document. Personalized form letters can be created by using APPEND to merge the form letter with a list of names and addresses.

One of the most powerful commands in *Clean Slate* is the Glossary function, which permits you to store any sequence of keystrokes under an ID name, and then call it up anytime you need the phrase in the text. Sequences of commands can also be stored using Glossary, so you can, for example, right justify a whole page with Justify, instead of a single line.

Like a little more? The Parameter Change function lets you change any or all of 20 parameters and system limits, such as cursor blink rate, printer pitch, linefeed count, printer status mask, and so forth. The cursor moves rather slowly, but that too can be changed from its preset value by simply varying the Repeat Rate, to the point that the cursor zips across the screen so fast you may want to slow it down.

If this isn't enough for you, *Clean Slate* also has a Terminal Communications Mode, with all the capabilities of full and half duplex, batch send, parity check, and so on.

Clean Slate works with TRSDOS, NEWDOS, VTOS, LDOS, DOS PLUS, TDOS, and several others but not Microdos.

Although the manual isn't written for beginners in computers or word processing, its 109 pages are crammed with detail. Before doing much hands-on stuff it is best to read the entire manual to get an overall picture of the large variety of features available.

Clean Slate doesn't have the tutorial audio tapes that come with *Scripsit* and *SuperScripsit,* but it is only $79.95. It is highly recommended for a sophisticated word processing package that has a raft of extras.

Med Systems Becomes ScreenPlay

One of the more ingenious software houses, Med Systems Software, changed its name to ScreenPlay this spring and dropped all but one of its utilities, educa-

Thank Heaven We got a Guardian Angel.™

*

"POWER FAILURE"

Goodbye valuable data. Unless you have a Guardian Angel uninterruptable power source on duty.

Guardian Angel switches to 150 watts of backup power in 1/100 of a second or less while alerting you of blackout or brownout conditions. Its rugged 12V battery gives you up to six minutes (15 at half-rated power), enough to save your data and shut down your system if line power does not return.

Guardian Angel is compatible with virtually every major microcomputer system, including Apple, IBM, H-P, TRS-80, Xerox, Eagle and Osborne. Its transient voltage suppressor also prevents system damage from power spikes.

Guardian Angel simply plugs in between your power source and your microcomputer. Its compact size permits either desktop use or out of the way placement.

Protect your investment: see your R.H. Electronics dealer today about Guardian Angel or contact us at 566 Irelan Street, Buellton, CA 93427, (805) 688-2047.

Guardian Angel, with LED power status indicator, automatically safeguards data from blackouts, brownouts for just $595.

RHELECTRONICS, INC.

*Patents pending. UL listed, FCC approved. 240V/50 Hz version available. Dealers and OEM inquiries invited.

CIRCLE 282 ON READER SERVICE CARD

tional programs, and other such software, to concentrate on games.

Most of the games are for the Model I/III/4 TRS-80; several are for the TRS-80 Color Computer and for the Apple, Atari, and IBM PC. The TRS-80 Model I/III/4 games include 3D adventures (with perspective) such as *Asylum*, 2D adventures such as *Warriors Of Ras*, and several Jyym Pearson epics (*The Institute*, *Lucifer's Realm*, and so forth), and arcade games such as *Laser Defense*. Color Computer games include *Invader's Revenge*, *Phantom Slayer*, and *Monkey Kong*. Write for the latest catalog, which includes T-shirts imprinted with logos from some of the games.

Gone are the excellent *GRBasic*, a graphics utility that adds a set of commands to Basic that lets you produce graphics with machine language speed directly from Basic, and the clever *Better Text*, which generates two sizes of large characters, permits you to create your own characters, and provides 15 commands for creating outstanding display screens with a minimum of programming effort.

ScreenPlay's QWERTY

The only non-game program still available from ScreenPlay is the *QWERTY 3.0* word-processing program, which is an extensive patch for *Scripsit*. First you copy *QWERTY 3.0* onto a TRSDOS or NEWDOS disk that already contains *Scripsit*; this requires two disk drives. Two versions of the program are supplied, for 32K and 48K machines.

QWERTY 3.0 is "aimed at using the proportional style of print as the main style of its texts, and is aimed at the production of technical reports," according to the manual. The program automatically prints proportionally, adds 75 new symbols (including upper- and lowercase Greek letters, math symbols, and so forth), adds subscripts or superscripts to any character, underlines, prints boldface, adds decorative borders to text, prints in two or three columns per page, indicates where pages will end without printing the text, and provides other conveniences not found even in Radio Shack's *SuperScripsit* (July 1983, p. 290).

The 75 new symbols are created by using combinations of backspacing, various linefeeds, and condensed and expanded styles of print. For example, an infinity sign is created by printing two lowercase letter o's close together. A lowercase Greek mu is made up of a lowercase u and a doubly overprinted exclamation mark.

The manual provides a great deal of information, but is difficult to use for reference. Although there is an index, the chapters aren't divided into sections, so you often have to scan a whole page to find what you want. This is a small point, however, in a most ingenious patch to *Scripsit* that has WP uses far beyond the proportional printing of technical reports.

QWERTY 3.0 is $74.95 for the Lineprinter IV and the Centronics 737 or 739. The *Daisy* version, for the Radio Shack Daisy Wheel II printer, is the same price and adds more than 100 new symbols. For cautious buyers, the 73-page *QWERTY 3.0* manual or the 110-page *Daisy* manual is $10, which is credited toward the purchase price of the software.

Short Program #43: Day of Week

From Charleston, SC, Leonard Zucker writes:

"I couldn't let go unchallenged Max Seim's claim (January 1983, p. 337) to the shortest Basic program to compute day-of-week. Here is a one-liner that tells you not only the day of the week of two given dates, but also the number of days between the dates. Furthermore, the program is accurate for dates from March 1, 1900 to February 28, 2100. The algorithm used is based on a program for the Hewlett-Packard 97 calculator included with its applications pack.

"I use this algorithm, which computes the number of days (Z) since February 28, 1900, in all my programs requiring calendar calculations. An inverse function allows me to recover month, day, and year for a given value of Z."

The one-liner, rewritten to make it easier to read, appears in Listing 1.

As a check, the number of days between March 1, 1900 and February 28, 2100 is 73048. Leonard also included a short program to demonstrate the use of his one-liner; mainly, it adds PRINT lines to make the RUN more easily understood.

The program computes the number of days after February 28, 1900, for each of the two dates, and then subtracts one from the other. For example, if you input 1,1,1983 and 1,1,1984, Z is computed as 30744 and X as 30379. The difference is 365.

Listing 1.

```
100 CLS
110 P$(0)="FIRST": P$(1)="SECOND"
120 PRINT P$(F);
130 INPUT" MM, DD,YYYY";M,D,Y
140 Z=D+INT(30.6001*(M+1-12*(M<3)))
    +INT(365.25*(Y-1900+(M<3)))
150 PRINT MID$("SUNMONTUEWEDTHUFRISAT",
    1+3*(Z-7*INT(Z/7)),3)
160 IF F=0 THEN X=Z: F=1: GOTO 110 ELSE
    PRINT "DAYS BETWEEN DATES = "ABS(Z-X)
```

Can you figure out the details of how Leonard's "one-liner" works? The 365.25 in line 140 is, of course, the number of days in each year of a four-year cycle. But what relationship does 30.6001 have to the number of days in a month? And if the actual number of days between 3,1,1900 and 1,1,1983 is 30256, why does the program come up with 30379 or 123 more days than the actual count?

Note: The program considers 1900, 2000, and 2100 as leap years, although only 2000 is; this is the reason for the accuracy limits.

Firms Mentioned In This Column

Howard W. Sams & Co., Inc.
4300 West 62 St.
Indianapolis, IN 46206.

ScreenPlay
Box 3558
Chapel Hill, NC 27514.



"Who needs coffee breaks? Working here is just like an 8 hour coffee break!"

TRS-80 Model 4
Super Business System

System Includes:

- Model 4 64K
- 2 Disk Drives
- EPSON FX-80 Printer
- Super Scripsit & Printer Driver
- Profile Plus
- 3200 Sheets Fan Fold Paper
- Box of 3M Diskettes
- 3M Head Cleaner
- Printer Cable
- Printer Stand
- Lemon Surge Protector
- Computer Dust Cover
- Printer Dust Cover

List Price $3489

Only $2888

ORDER TOLL FREE: 800-526-5313
COMPUTER DISCOUNT OF AMERICA, INC.
15 Marshall Hill Road, West Milford Mall
West Milford, New Jersey 07480-219
In New Jersey Call 201-728-8080

Computer Discount of America

CIRCLE 124 ON READER SERVICE CARD

NEW! EXTENDED PROTECTION AGAINST SPIKES, SURGES AND LINE NOISE!

SCOOTER's new XP-4 GUARD-IT™ CONTROL CENTER with state-of-the-art fail-safe design

Here's how it works. Combining a new surge protection with solid state devices, SCOOTER's XP-4 reduces spikes (normal and common mode) as high as 6000 amps and filters line noise. In the unlikely event of filter module failure due to repeated surge hits, the XP-4's fail-safe design goes to work, blocking all unprotected power to your equipment. But the XP-4 filtering modules are so reliable, the unit has an extended three-year protection warranty against failure.

$74.95
SUG. RET.

3-YEAR WARRANTY

SCOOTER™
High Grade Electronic Components

ohm/electronics
746 Vermont
Palatine, IL 60067
(312) 359-6040

FREE SCOOTER™ T-SHIRT!

SEND proof of purchase (sales receipt) for Scooter merchandise
OR SEND the name of your computer dealer if he does not carry the Scooter™ High Grade Electronic Component line
WITH THIS COUPON and your name, address, T-shirt size and computer make to: **ohm/electronics, 746 VERMONT ST., PALATINE, IL 60067** CC 10-83

CIRCLE 204 ON READER SERVICE CARD

iews...book r

Stephen Gray, et al.

Fundamentals of Interactive Computer Graphics, by James D. Foley and Andries Van Dam. Addison-Wesley Publishing Co., Reading, MA. 680 pages, hardcover $34.95, 1982.

The latest in the publisher's Systems Programming Series (sponsored by IBM Corp.), this handsome book, designed to provide both a tutorial and a reference source, "presents graphics concepts and recent advances in graphics hardware and software," according to the jacket, which adds, "The authors develop a complete graphics application program in Pascal, using the new Core System of standard graphics subroutines proposed by ACM's Siggraph."

The 17 chapters are presented in a shell sequence. Shell One covers the basics; Shell Two, mathematics, data structures and display architecture; Shell Three, modern raster technology; and Shell Four, making realistic synthetic photographs. An extensive, 29-page bibliography is included.

Although no previous background in graphics is needed, the authors assume "A basic background in programming and data structures, and some familiarity with computer architecture." They also assume a knowledge of matrices and differential calculus.

Although slightly stuffy, the writing is authoritative, detailed, and clarified by many drawings and photographs, including a section of 28 color plates. This is one of the best computer graphics texts available, either for classroom use or for individual reading.

Computers for Sea & Sky, by Stephen J. Rogowski. Creative Computing Press, Morristown, NJ. 112 pages, paperback $9.95. 1982.

The subtitle of this 8-1/2-inch-by-11-inch collection of 47 programs in Basic is, "A compendium of computer programs and algorithms for use in navigation, aviation, astronomy, surveying, meteorology, sailing and a myriad of other disciplines." The back cover adds "You can perform the calculations scientists use to predict the time of sunrise, the date for Easter, or the distance between any two points on earth."

The seven chapters provide programs for Aviation (Propeller Tip Speed, Rate of Climb, etc.), Charts (Meridional Parts, Chart Scaling, etc.), Mathematics (Plane Oblique Triangles, Haversine Computation, Ageton Navigation Method, etc.), Meteorology (Temperature Conversion, Barometric Correction, etc.), Navigation (Dead Reckoning, Great Circle Computations, etc.), Speed/Distance (Line-of-Sight Distance, Speed Computation, etc.), and Time and the Sky (Easter Date, Day of the Year, etc.). The book ends with a glossary, bibliography, and an appendix of constants.

Each program is accompanied by a full discussion of the topic (with relevant formulas), a listing, examples with runs, and usually a drawing or two. The book is handsomely typeset by software

views...book

developed at SUNY by the author, who is a teacher and also a licensed pilot.

The author has "avoided string variables and even subscripted arrays wherever practical. It should be possible to run most of the programs on all micros and even some of the pocket computers which have emerged using Basic."

Although not for everybody, this very well written and produced book is the first of its kind, and should be of interest to pilots and navigators (for whom it can replace a great many tables), and anybody else with an interest in the subject.

More Subroutine Sandwich, by John P. Grillo and J.D. Robertson. John Wiley & Sons, Inc., New York. 270 pages, paperback $12.95, 1983.

This is the second of two manuals of Extended Basic subroutines useful in reducing the time required to build programs. The 15 chapters are divided into three parts: Suggestions to the Reader (How to Use This Book, How to Use the Subroutines), Subroutines, and Mother Programs.

The eight subroutine chapters cover Date Processing (Julian Date, Reverse Day of the Year, etc.), Word Processing (Buffer Fill, Text Justify, etc.), Cryptography (Phrase Key Code, Rail-Fence Code, etc.), Mathematics (Binary-to-Decimal Conversion, Horner's Method, etc.), Table Management (Insertion Sort, Quicksort, etc.), Statistics (Rank, Permutations, etc.), Table Lookup and Utilities (Interpolation Search, Shuffle, etc.), and Business (Straight-Line Depreciation, Declining-Balance Depreciation, etc.).

Each of the 36 subroutines covers four pages, and includes a description of how it works, source reference, listing, list of variables, notes on modifications and special features, a program that incorporates it, and a run.

Each of the last five chapters contains a mother program that "illustrates the real-life applications of many of the subroutines": Resort Time-Sharing Weeks, Text in Adjacent Columns, File Protection, Chebyshev Polynomial Plotter, and Probability of One Pair in Poker.

The title of the book comes from the authors considering the first and third parts (suggestions and mother programs) to be the slices of bread, and the subroutines to be the filling: the cover shows a juicy hamburger.

There have been many books of "useful" programs; this is one of the very few to provide such programs as building-block subroutines, to be assembled into whatever the reader has in mind. And it is one of the very best, packing many useful ideas into a handy volume. Although "intended primarily for the TRS-80 Basic programmer, it is appropriate for any other programmer as well."

The only catch is that, to have the widest choice of subroutines, you'll have to buy the authors' first book, *Subroutine Sandwich*, also $12.95, with almost exactly the same chapter headings and thus the same types of subroutines among the 36 provided. The five mother programs are Annotated Calendar, Binary Addition Drill and Practice, Tea Selection, Linear Interpolation, and Monthly Sales Data Report.


Software Author
Have you developed "the best of the breed" vertical market business microcomputer software in your field? Is the product tested, proven and ready to go? Now you've found that the investment in packaging, marketing, distribution and support for national exposure is far greater than you can handle? Then we want to talk to you.
Accountants Microsystems Inc., AMI, is America's leading vertical software marketer.
We're a large venture-backed firm with six regional offices, a high level channel of distribution and a national support system second to none. We are looking for vertical packages operating under MS-DOS and XENIX/UNIX that require a quality distribution/support system in order to be successful. Maybe that's your software. Call today, or send a letter to our manager of product acquisition.
ACCOUNTANTS MICROSYSTEMS INC.
AMI
3633 136th Pl. S.E., Bellevue, WA 98006
(206) 643-2050

CIRCLE 103 ON READER SERVICE CARD

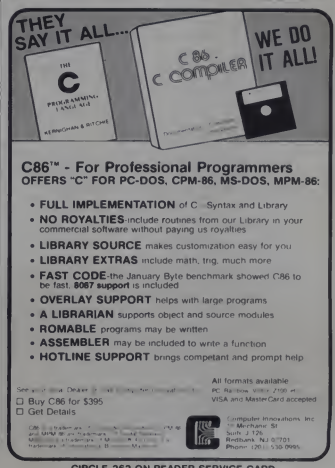
THEY SAY IT ALL...
WE DO IT ALL!
C 86 C COMPILER
THE C PROGRAMMING LANGUAGE
KERNIGHAN & RITCHIE
C86™ - For Professional Programmers
OFFERS "C" FOR PC-DOS, CPM-86, MS-DOS, MPM-86:
• FULL IMPLEMENTATION of C - Syntax and Library
• NO ROYALTIES-include routines from our Library in your commercial software without paying us royalties
• LIBRARY SOURCE makes customization easy for you
• LIBRARY EXTRAS include math, trig, much more
• FAST CODE-the January Byte benchmark showed C86 to be fast. 8087 support is included
• OVERLAY SUPPORT helps with large programs
• A LIBRARIAN supports object and source modules
• ROMABLE programs may be written
• ASSEMBLER may be included to write a function
• HOTLINE SUPPORT brings competant and prompt help
All formats available
PC Rainbow, Xenix 7/86 etc.
VISA and MasterCard accepted
☐ Buy C86 for $395
☐ Get Details
Computer Innovations, Inc.
980 Mantanic St.
Suite J-126
Rethuna, NJ 07701
Phone: (201) 530-0995

CIRCLE 262 ON READER SERVICE CARD

DON'T LEARN
VISICALC™1
MULTIPLAN™2
SUPERCALC™3

Use Our Ready-Made Templates Instead

Runs with Visicalc, Supercalc, Multiplan. Calc Result and soon other Spread sheets—Save days, weeks, months of work for LOW COST— Very Simple instructions—Complete documentation w/ sample printouts—Completely modifiable—Backup capable—Top quality 8 ½ X 11 printouts— Only one drive needed in most cases—Overlay files or save each one separately

Available for most popular computers—APPLE II- ii- E • COMMODORE 8096 & 64 • IBM -PC • TRS 80 I-III-IV-16 • OSBORNE • ATARI • XEROX • KAYPRO • CP/M

CONSTRUCTION ESTIMATING $59.95 — 18 complete forms covering all phases of residential construction—Used by hundreds of contractors & architects

FINANCE PROJECTIONS $59.95 — 11 forms to do forecasting of sales and finances to show your banker or investor—Follows SBA formats.

REAL ESTATE INVESTMENT COMPARISONS $59.95 — 6 NINEB forms that analyze property incomes, calculates PV of cash flows compares various investments along with their tax results and calculates the internal rate of return

HOME WORKSHEETS $39.95 — A 12 month budget shopping list, amortization schedule, IRA, IRS schedule A

* * *

Future Templates—Retailing • Energy Adult • Engineering • Multi-Level-Marketing • Office Management • Electrical Construction • Plumbing Construction • Commercial Construction

SPECIFY COMPUTER MAKE; SPREADSHEET PROGRAM NAME, DISK FORMAT AND DOS.

* * *

ORDERS ONLY (800) 824-7888 OPER. 583
INQUIRIES (714) 338-5075
CBO OK—CREDIT CARDS WELCOME—(MC/VISA)—Add $3.00 shipping or handling, street address required Calif.—add 6% sales tax.

SOFTWARE MODELS
"The Template People"
P.O. Box 1029 • Crestline, CA 92325

TM1-by VISICORP, TM2-by MICROSOFT, TM3-by SORCIM

CIRCLE 238 ON READER SERVICE CARD

Continuous CHECKS

for Desk-Top Computers

as low as $29.95

for 250 checks printed with your name and bank information

- Statements, invoices, other forms compatible with software from over 300 sources.
- Or program to NEBS standard forms yourself.
- Quality products in small quantities shipped direct to you. Fast service, low prices, money-back guarantee.

FREE one-stop catalog of computer forms, stationery, supplies and accessories.

Write or phone for your copy Today.

TOLL FREE 1 + 800-225-9550

(Mass. residents 1 + 800-922-8560)



A division of New England Business Service, Inc

14002

CIRCLE 162 ON READER SERVICE CARD

views...books

Parent's Guide to Computers in Education, by David Moursund. Int'l Council for Computers in Education, 135 Education, Univ. of Oregon, Eugene, OR 97403. 80 pages, $3.50.

The Parent's Guide is an easy introduction to the use of computers for education in the home. Obviously, it does not replace the school of "hard knocks," i.e., real world experience, but it makes the entry much simpler.

This little 80-page book has seven chapters and two appendices. The first six chapters focus on the "School of the Future," an introduction to the use of computers in education, hardware, software, and other general information.

The first chapter is fascinating: it is David Moursund's view of the School of the Future. He leads his readers through a wonderful, imaginary vision of a classroom of the future, and then asks if his scenario seems like science fiction. You are tempted to say "yes," but David shows how everything in the scenario is possible now using the technology of today.

In the section on history, a couple of dates are off by a few years, but the gist is on target, and one is left with the feeling that we have come a long way. Baby, much further than you might think.

Unfortunately, it is not until the seventh chapter that we get to the really meaty information of how to select and buy a small computer. Nevertheless, the earlier information is very useful, and interested parents will want to bone up on this material.

The final (7th) chapter contains a "Buyer's Plan" containing handy charts for assessing your needs and your implementation (fancy way of saying, the hardware and software you intend to buy).

A sidelight, or perhaps we should say the highlight, of the book, is the boxed righthand eighth pages by Merle Marsh titled, "Comes the Dawn." This is a description of the trials and tribulations of a mother of a "Compukid" at the time of the purchase of a first computer for their home.

To our knowledge, there is no other book on the market like this one. If you are an interested parent with a child between 4 and 17, an investment of $3.50 for this book would be well worthwhile. (If your local bookstore doesn't have it, ICCE will send you a copy for just $3.50 postpaid.) —*DHA*

The Wonders of Magic Squares, by Jim Moran. Vintage Books, a division of Random House, New York. 234 pages, paperback $5.95. 1982.

Magic squares are "the mathematical equivalent of the crossword puzzle and two-dimensional cousin of the Rubik's Cube... an absorbing diversion of great antiquity," over 3000 years old, according to the press release accompanying this intriguing book.

The 56 sections of the book are divided into three chapters: Introduction; The Construction of Odd-Order Magic Squares (with 14 methods); the Construction of Even-Order Magic Squares (with nine methods). The other sections cover a range of magic-square subjects, including Disguised Magic Squares, and Benjamin Franklin on Magic Squares, and a few non-magic-square items, such as The Structure of the Binary System (although the book doesn't get into the computer solution of magic squares), and Peculiarities of the Number 37.

Moran, better known as a publicist and practical joker (to publicize a Broadway play, he rode through Manhattan in the back seat of a London taxi with an orangutan in the driver's seat), hadn't even heard of magic squares until five years before

views...book

writing the book. He learned fast, and has filled these 200-plus pages with enough on the subject to satisfy almost any math addict.

The writing is often unorthodox for such a subject, with a highly personal and original style, but it is infectiously enthusiastic. Moran manages to find connections between magic squares, tic-tac-toe, genetics, atom bombs, and egg foo yung. For $5.95 the book is a bargain for anyone interested in the "beauty and fun" of magic squares.

Microcomputer Disk Techniques, by Paul Swanson. Byte Books/McGraw-Hill, Peterborough, NH. 243 pages, paperback $15. 1982.

This slim but expensive paperback "will help the microcomputer user squeeze every bit of use out of a disk system," according to the back cover, which adds that "the authors show how sophisticated methods used on larger computers may be implemented on a personal computer."

The 23 chapters are divided into two parts; the first consists of three introductory chapters on the disk and disk drive, DOS, and Taking Care of the Disk. The four sections in Part Two have no titles, but might be called Random-Access Files, Three Types of Key Files, Parameter-Driven Subroutines, and The Key-File Program. The five appendixes contain several expected items, along with a listing of the program used to create the glossary, and a 44-page supplement that explains the differences between the Apple and the TRS-80 the book's examples are written with.

This detailed, highly knowledgeable, and apparently unique book is very well written in a clear, simple style. It is recommended to any amateur programmer who really wants to learn how to make the most effective use of a personal computer disk drive.

Assembly Language Graphics for the TRS-80 Color Computer, by Don Inman and Kurt Inman. Reston Publishing Co., a Prentice-Hall Co., Reston, VA. 288 pages, hardcover $19.95; paperback $14.95. 1983.

Once you've thoroughly understood Inman's book, *TRS-80 Color Computer Graphics* (Reston), you might want to see "how an assembler can be used to perform feats that would be quite difficult, if not impossible, in Basic language. Rather than introduce machine and assembly languages through a mathematical approach, we have chosen sound and graphics as the vehicle for learning," the preface says.

After an introduction to machine language, the book looks at Sound, Editing, Color Graphics, Animation, Sound and Graphics, Joystick Animation, Text, Graphics with Text, and Vistas Beyond (mostly on making your own PROMs and machine language tapes). Each chapter ends with a summary and test; answers are provided for the odd numbered test exercises. The authors use and recommend the CBUG machine language monitor and SDS80C Software Development System from The Micro Works (Del Mar, CA).

Rather than merely presenting assembly language programs to be keyed in and run, the authors explain the meaning of all the instructions, with many examples, in a very clearly written text intended for hands-on use.

Assembler is not an easy language for most Color Computer users who know only Basic, but this text is one of the very best (and very few) to explain it as simply as possible.

From Computer Plus to YOU . . .

PLUS after PLUS after PLUS

Model 100 8K $679
Model 100 24K $835

Color Computer II 16K $186
w/16K Ext Basic $248
w/64K Ext Basic $305

Model IV 16K $649
Model IV 64K
2 Disk II $1372 $1499

CITOH Prowriter $375
CITOH Prowriter II $649

CoCo Drive 0 $329
CoCo Drive 1 $235

DWP210 $629

BUY DIRECT *Here are just a few of our fine offers Call TOLL FREE for full information*

COMPUTERS		R S Modem II	160	**DISK DRIVES**	
Model 12 64K 1 Drive	1369	R S DC 1200	566	R S Model IV Drive 0	515
Model 12 64K 2 Drive	1575	**PRINTERS**		Color Computer Drive 0	329
Model IV 16K	849	Smith Corona TP1 D W	469	Color Computer Drive 1	235
Model IV 64K		Silver Reed EXP500 W	430	Primary Hard Disk 5M2	2689
2 Disk II $1232	1699	Silver Reed EXP560 W	668	Primary Hard Disk 16M	1799
Color Computer II 16K	185	Daisy Wheel II	1745	**ETC.**	
w/ 16K ext. basic	248	DMP200	629	CCR 81 recorder	82
w/ 64K ext. basic	305	DMP400	1199	C.C. Joysticks (pair)	22
Pocket Computer 2	168	DMP105	789	16K Ram Chips	25
Model 160 TD+ 25col	4249	DMP100	515	Hayes Chronograph	79
Model 160 TD+ 80col	4915	DMP120	395	Bit Pad Plus Microtouch	420
Model 100 8K	679	DMP200	520	Parallel printer cables are	
Model 100 24K	835	DMP400	1010	available for most computers	
MODEMS		DMP520	1219	**SOFTWARE**	
Lynx M4 Mini	235	DMP2100	1768	CoCo Hot Files D D S	69.95
Hayes Smartmodem II	236	Gemini 10X	315	R S Software 10% off list	
Hayes Smartmodem 1200	566	Gemini 15	425	Send for listing of	
Novation Smart-Cat 1200	469	CITOH Prowriter	375	brand name software	
Novation J-Cat	125	CITOH Prowriter II	649		
R S AC-3	129	Okidata	CALL		
R S Modem I	89	Epson	CALL		

We have the lowest possible Fully Warranteed Prices AND a full complement of Radio Shack Software.

Prices subject to change without notice. Not responsible for typographical errors. TRS-80 is a registered trademark of Tandy Corp.

TOLL FREE 1-800-343-8124

computer plus

P.O. Box 1094
681 King Street
Littleton, MA 01460
617-486-3193

Write for your free catalog

SINCE 1977 —

CIRCLE 137 ON READER SERVICE CARD

Paddle-Adapple

I/O EXPANSION ADAPTOR FOR APPLE][& //e



• Works with all Apple compatible joysticks and paddles • Unique "Jumpers" socket allows you to configure to meet your needs • Select one of two devices or use 4 paddles simultaneously • Gives you four pushbutton inputs • Supports shift key modification • Exchange X & Y joystick axis • Small & compact—adheres to computer with supplied foam tape • All strobes, annunciators and power available on both connectors **$29.95**

Paddle-Adapple 'D'

Same as the PADDLE-ADAPPLE that we all know and love, except it has two sub-miniature 'D' connectors. These are used on the new paddles and joysticks for use with the APPLE // e. It also permits the new style paddles and joysticks to be used with the APPLE][and][+ **$29.95**

Paddle-Adapple Combo

Again, the same PADDLE-ADAPPLE except it has one 16 pin socket, and one subminiature 'D' socket **$29.95**

These fine products come with a 90 day warranty
Available at your local dealer or direct from:

SOUTHERN CALIFORNIA RESEARCH GROUP
Post Office Box 2231-C
Goleta, CA 93118
(805) 685-1931
VISA, MASTERCARD accepted

Add $2.50 for shipping, $5.00 outside U.S.A. & Canada. CA add tax.

Apple is a trademark of Apple Computers

CIRCLE 276 ON READER SERVICE CARD

ARE YOU DROWNING IN A SEA OF SOLUTIONS?

Recognize the symptoms?

Applications backlog? Technology blur? Mounting user pressures?

You suspect that suppliers may have answers to your pressing problems, but you don't have enough time to sort through fragmented information to determine what will really work for you.

Like the shoemaker's kid who goes barefoot, you (of all people) need a system. An information system that displays all your current software, hardware and communications options for instant reference.

That system is DATA SOURCES, and you're invited to make it work for you. Simply fill in the coupon and we'll send you DATA SOURCES at 50% off its regular cover price.

What DATA SOURCES does is organize your options. It guarantees that you've considered all relevant products. And makes the most of your time for product evaluations by guiding you to those with the best possibility of success.

DATA SOURCES is a conveniently sized, extremely well-organized and skillfully indexed reference...maintained on a database, constantly updated and published quarterly.

READ WHAT USERS SAY...

"...Current and comprehensive listings are becoming indispensable."
Gary Yost
Marketing Services Director
ASK Computer Systems, Inc.

"Literally use it daily...dramatically shortens research time...provides more alternatives than would have been known or considered."
Curt Flatness, V.P.
Logic, Inc.

"Answer to a Systems Integrator's prayer...very effective for locating the equipment we need ...using it for everything from single-user systems to systems interfacing with mainframes."
Richard Fletcher, President
Micro Computer Adaptation Procedure

"Dependable source of information otherwise unobtainable or costly to obtain..."
Barry Kukes, President
RSI Repair Service, Inc.

NEW FEATURES...

- ✓ Quick-reference product comparison charts.
- ✓ Market-tracking trends of new DP products.
- ✓ Before-you-buy selection criteria and checklist.
- ✓ Geographical listing of vendors offering on-site and depot maintenance.

YOU GET...

Hardware—Over 12,000 products from Micros to Mainframes including peripherals—terminals, printers, memory devices, etc...organized by systems compatibility.

Software—The largest available inventory of business packages for micros, minis, and mainframes including operating systems, utilities, and application packages.

Communications Equipment—from modems and multiplexors to local networks, carriers and services. Quick reference comparison charts, plus all diagnostic and test equipment.

Services, Suppliers, Support—Most complete organized listing of suppliers from installation design to maintenance and data center operations.

ORDER NOW AND SAVE 50%

Yes! Rush me the latest two-volume edition of DATA SOURCES and enter my subscription at $60.00 for 4 quarterly editions. I save a full 50% off the regular $120.00 cover price.

Name _____

Title _____

Company _____

Address _____

City _____ State _____ Zip _____

Telephone _____

Nature of Company's Business _____

Please check appropriate box: ☐ END USER ☐ VAR/OEM ☐ DISTRIBUTOR ☐ DP MFG ☐ OTHER _____

An information product of Ziff-Davis Publishing Company. Satisfaction guaranteed.

Return coupon to:

DATA SOURCES
P.O. Box 5845, Cherry Hill, N.J. 08034.

SAVE TIME...CALL DIRECT
1-800-227-1617 Ext. 251
(In Ca., 1-800-772-3545 Ext. 251)

Residents of Ca., Co., Ct., D.C., Fl., Il., Ma., Mi., Mo., N.J., N.Y., Vt., please add applicable state taxes. T121

the creative computer mart

SOFTWARE AND HARDWARE SHOPPERS GUIDE

EDUCATIONAL SOFTWARE

TRS-80, COLOR COMPUTER, PET & APPLE II

ELEMENTARY	MATH
SCIENCE	HISTORY
GEOGRAPHY	ACCOUNTING
ECONOMICS	BUSINESS ED.
FOREIGN LANG.	PHYSICS
GRAMMAR	FARM RECORDS

Write for FREE Catalogue:

MICRO LEARNINGWARE, Box 307 Mankato, MN 56001
(507) 625-2205
VISA & MASTER CARD ACCEPTED

We pay 15% royalty for Educational Programs listed with us.
TRS-80 is a registered trademark of TANDY CORP.
PET is a trademark of COMMODORE BUS. MACHINES
APPLE is a trademark of APPLE COMPUTER CO.

CIRCLE 410 ON READER SERVICE CARD

★MICROCOMPUTER★ BUSINESS SOFTWARE

MEDICAL MGMT...
DENTAL MGMT...
INSURANCE AGENT
LEGAL BILLING.....
PROPERTY MGMT..
AND MUCH MORE !

UNIVAIR INTERNATIONAL
9024 St. Charles Rock Road
ST. LOUIS, MISSOURI 63114
(314) 426-1099

$1,250.00 FRANKLIN SYSTEM

SYSCOM II (Apple Compatible)	$ 550
APPLE IIe SYSTEM	$1,675
FRANKLIN 1200	$1,599
*APPLE TYPE DRIVE	$ 180
128 K Card	$ 250
GEMINI 10	$ 300

FREE BROCHURE

!!WE WILL BEAT ANY PRICE!!

SOFTSELL SYSTEMS
P. O. Box 18926
Philadelphia, Pa. 19119
Visa, MasterCard preferred or C O D
Apple is a trademark of Apple Computer

CIRCLE 411 ON READER SERVICE CARD



ONLY $19.95!

AMPOTRONIC JOY STICK FOR APPLE COMPUTER

- Self Centering
- 360° Cursor Control
- Full X-Y Coordinate Control
- 2 Firing Buttons
- 30 Day Money-Back Guaranty
- Dealer Inquiries Invited

Send check or money order for $19.95 each plus $2.50 for postage and handling. New York State residents add sales tax

AMPOC ENTERPRISES, INC.
5 BEEKMAN ST. SUITE 720
NEW YORK, N.Y. 10038

SAVE UP TO 50% ON Floppy Disks & Computer Supplies

We Discount the Top Brands
3M-Scotch® • Verbatim® • Dysan
Memorex • BASF • Maxell®

We also stock
Ribbons • Paper • Labels
Cleaning Kits • Printwheels
Storage Products

Call, write, or utilize Reader Service for our FREE new DISCOUNT catalog

LYBEN COMPUTER SYSTEMS
27204 Harper
St. Clair Shores, MI 48081
(313) 777-7780
Offering Reliability and Same Day Service

CIRCLE 412 ON READER SERVICE CARD

MEMOREX FLEXIBLE DISCS

WE WILL NOT BE UNDERSOLD! Call Free **(800)235-4137** for prices and information. Dealer inquiries invited and COD's accepted.



PACIFIC EXCHANGES
100 Foothill Blvd
San Luis Obispo, CA
93401 In Cal call
(800)592-5935 or
(805)543-1037

CIRCLE 413 ON READER SERVICE CARD

Radio Shack and TDP-100

DISCOUNT DISK DRIVES

100% APPLE COMPATIBLE

BOSS DRIVE	**$199**
FOURTH DIMENSION	**$235**
VISTA SOLO	**$245**
VISTA DUET SINGLE D/S THIN W/CONTROLLER	**$330**
VISTA QUARTET DUAL D/S THIN W/CONTROLLER	**$650**
V1000 DUAL 8" W/CONTROLLER	**$1249**
V1000 DUAL D/S 8" W/CONTROLLER	**$1512**
V1000 DUAL D/S 8 THIN W/CONT	**$1839**
V1200 6 MEG CART. W/CONTROLLER	**$1203**

WHOLESALE SUPPLY INC
408-373-0320

TRS-80 COMPUTER DISCOUNTS

- Factory Direct
- Best Prices Anywhere
- No Out-of-State Taxes
- 100% Radio Shack Warranty
- Free Price List

SCOTT TASSO ASSOCIATES
175 North Delsea Drive
Vineland, N.J. 08360
800-257-0426
NJ 609-691-7100

$241.20 WEEKLY

working one or two hours a day while using your personal computer. **GUARANTEED.** Simple program process. No special skills or experience beyond Basic computer knowledge. Free details/application.

Computer Technology Group/Systems
Suite 172
11417 West Avenue
San Antonio, Tx 78213

CIRCLE 417 ON READER SERVICE CARD

MICROCOMPUTER OWNERS OUR BROKERS IN YOUR OFFICE EVERY TRADING DAY

That's right! Through your computer we will be in your office with recommendations. Not vague buy low, sell high verbage — but with SPECIFIC TRADES and defined risk. You will know our thinking before the trade, and you decide what trades are placed in your account.
If you are serious about your Commodity portfolio, let us show you our stuff. For an introduction to our QuickBroker microcomputer service, send your name, address, phone number to

WORLEY COMMODITIES INC.
16000 Memorial Drive — Suite 280
Houston Texas 77079 • 713/497-7787

Worley Commodities, Inc.
A REFCO AFFILIATE

Houston • New Orleans • Oklahoma City

CIRCLE 418 ON READER SERVICE CARD

MS DOS & ATARI Compatible APPLICATION SOFTWARE

POWERFUL Business Software	**Integrated**
ORDER ENTRY INVOICING INVENTORY CONTROL ACCOUNTS RECEIVABLE SALES ANALYSIS MAILING LABELS PURCHASE ORDERS	**$695** **Complete** **(MS DOS Only)** **Demo Pkg. $50**
Residential Property Analysis for Homeowners, Buyers & Agents	**$29.95**
Investment Property Cash Flow Analysis	**$49.95**
Sales Manager Database for Sales Activity	**$99.95**

Contact
Distributed Computing Systems
PO Box 188
Lombard, Illinois 60148
(312) 495-0121

R.I.S.T. Inc. ANNOUNCES SPEECH SYNTHESIZER

ORDER NOW **SALE** ORDER NOW

$59.95

Phrase Finder Program $5 VALUE FREE
Speech Synthesis Manual $10 VALUE FREE

Apple II, II+
TRS80 Models I, III
Commodore 64, VIC 20
ZX80/81 and TS1000
Regularly $89.95
Now Only $59.95 + $4.00 sh/hd.

Complete or Starter Kits Available
10 Day Money-Back Guarantee
Send check or M.O. COD add $1.50 to: R.I.S.T. Inc.
Dept. Z1083, P.O. Box 499 Ft. Hamilton Station
Brooklyn, NY 11209 212-259-4334
N.Y.S. RESIDENTS ADD 8¼% TAX

CIRCLE 418 ON READER SERVICE CARD

Maxell Floppy Disks

The Mini-Disks with maximum quality.

Dealer inquiries invited. CODs accepted. Call FREE (800) 235-4137

PACIFIC EXCHANGES
100 Foothill Blvd. San Luis
San Luis Obispo, CA 93401
In Cal call (800) 592-5935 or
(805) 543-1037

CIRCLE 413 ON READER SERVICE CARD

COMPUTERIZED GREETING CARDS Special Christmas Card Series

Now you can have your computer send a personal message to everyone on your Christmas list. Our beautiful Christmas Cards and Envelopes come continuous with tab feed for standard and home printers.

Box 20 Cards w/Matching Envelopes
Only $9.95
specify design when ordering
CX 1 — Santa Clause
CX 2 — Snow Scene and Sleigh
CX 3 — Yuletide Scene
CX 4 — Religious
to order send check or money order
VISA/MC accepted - C.O.D. add $3.00
Include $1.50 per order ($5.00 Foreign Orders) shipping.

Compu Cards
P.O. Box 894
Stone Mtn., GA 30086

Samples sent on request
Phone orders:
(404) 299-0713

CIRCLE 426 ON READER SERVICE CARD

NEW COMPUTER T-SHIRTS, BUMPER STICKERS & COFFEE MUGS

GREAT GIFTS

NUMBER OF T-SHIRTS		NUMBER OF STICKERS & MUGS
____	PROGRAMMERS DO IT WITH REMARKS	____
____	PROGRAMMERS DO IT BIT BY BIT	____
____	PROGRAMMERS DO IT WITH COMMAND	____
____	IBM DOESN'T EVERYBODY	____
____	10 REM T-SHIRT	____
____	10 REM BUMPER STICKER	____
____	10 REM COFFEE MUGS	____

PLEASE RUSH ME ____ T-SHIRT(S) @ $8.95 EACH AND

____ BUMPER STICKER(S) @ $4.95 EACH AND

____ COFFEE MUG(S) @ $4.95 + .50 HANDLING

BE SURE TO SPECIFY MESSAGE AND SIZE (SM, MED, LRG, & X-LRG) OF T-SHIRTS.

SEND CHECK OR MONEY ORDER TO:

COMPUTER HUMOR
P.O. BOX 859
PARK CITY, UTAH 84060
CC93

CASSETTES!!!

FOR YOUR COMPUTER DIGITAL

- Computer Grade
- 100% Error Free
- Fully Guaranteed
- Wide Dynamic Range
- 5 Screw Housing
- Carefully Packed

All Prices include U.S. Shipping
Phone Orders Add $2.50 C.O.D. Fee

COMPUTER TAPE PRICES

Length	25 LOT	100 LOT	1000 LOT
C-5	45/11.25	35/35.00	30/300.00
C-10	50/12.50	35/35.00	30/300.00
C-20	55/13.75	40/40.00	35/350.00

BASF DPS Tapes Add .05 Cents Per Tape
—Custom Lengths Available—
Write For Volume Prices

—Norelco Cassette Cases and Labels—
(with Cassette Orders Only)

12-249 Cases .20 Ea	250-13 Ea
12 Labels for .20	120 for 1.70
1000 Pinfeed Labels	14.50

SEND MONEY ORDERS OR CHECKS TO

CASS-A-TAPES
Box 8123-G
Kansas City, MO 64112
816-444-4651

TYPEWRITER INTERFACES

$175 ASSEMBLED & TESTED
CENTRONICS PARALLEL
1 YEAR WARRANTY

- ROYAL 5010
- ROYAL ALPHA 2001
- OLIVETTI ET 121, 221 & 231
- PRAXIS 30, 35 & 40
- CUSTOM INTERFACING

CENTRONICS PARALLEL RS 232 OPTION $225.00
SERIAL PARALLEL KSR OPTION $250.00
(FOR ALPHA & PRAXIS ONLY)

CALL COLLECT!
(615) 727-6000

SYSTEMED PO Box 600
[illegible] MOUNTAIN CITY, TN 37683

VERSACALC!

VERSACALC!
VERSACALC!
VERSACALC!
VERSACALC!
VERSACALC!
VERSACALC!

TUTORIAL
UTILITIES
AND FILE MANAGER
ENHANCEMENTS TO VISICALC

- SORT any number of rows alpha, values, formulas. You select the column of the sort
- MENU – DRIVEN MODULES for your own applications programs
- CONDITIONAL TESTING in several ways
- AUTO CATALOG from within VisiCalc
- PRINT OUT THE LIST OF COMMANDS
- AUTO SCREEN FORMAT from within VisiCalc
- AUTO BATCH UPDATE e.g. running average type forms

YES! We have SORT VISICALC!

VERSACALC runs within VisiCalc

Apple	48K DOS
Commodore	64 DOS
TRS-80 Model 4	CP/M
Apple	CP/M

$50.00
$50.00
$50.00
$50.00

Anthro-Digital, Inc.
261 Ramapo Avenue
Pittsford, MA 01201
413-448-8278

Dealer Demo Disk Available

Software Specials

For Apple By LJK	Letter Perfect w/Mail Merge	$98.94
For IBM-P.C. By Information Unlimited Software	Easy Planner	$165.00
For NEC By NEC	General Ledger	$400.00
For Atari By Sierra On-Line	Frogger Co D	$22.00

Great Service. Low Prices.

Call 800-237-3500
In NY State 212-246-0300

Call or write for our free catalogue.

GORIN COMPUTER
PO Box 86 Brooklyn New York 11229

CIRCLE 414 ON READER SERVICE CARD

PROGRAMMERS FLIGHT SIMULATOR
Apple II Plus DOS 3.3 48K

This total IFR System disk features gobs of menu selectable flight programs each with breath taking realistic picture graphics, moving scenery, airport approaches, holding patterns and much much more.

$50.00 At your computer Store or direct from
Visa Mastercard

Programmers Software
Box 199
Cabot, Arkansas 72023
(501)843-2085

CIRCLE 415 ON READER SERVICE CARD

POWER LINE PROBLEMS?

SPIKE-SPIKERS™... The Solution!

Minimize equipment damaging spikes and conducted RFI noise to or from sensitive equipment. Transient surge protection plus low pass RFI hash filtering. All units 120V 15A

MINI II $44.95
Wall Mount
3-stage filter
2 sockets

QUAD II $59.95
Wall mount Dual 3-stage filter
4 sockets & light

DELUXE $79.95
Dual 5-stage filtered ckts
8 switch sockets
main switch fuse light

Kaigle Electronics Co., Inc.
65 B4 Ruch Rd Dept C C
Bethlehem PA 18017

Order Factory Direct
215-837-0700

Out of State
800-523-9685

DEALERS INVITED
PA Res Add 6%, ■ COD add $3.00 ■ Shipping

CIRCLE 418 ON READER SERVICE CARD

NEW

ADD 64 MORE K'S
TO YOUR PERSONAL COMPUTER

GREAT GIFT $39.95 GREAT GIFT

64 K KARD
COMPLETE WITH
INSTALLATION DOCUMENTATION

PLEASE RUSH ME ____ COPY(S) OF
THE 64K KARD AT $3.95 EACH

SPECIFY COMPUTER

TO ORDER SEND CHECK OR
MONEY ORDER TO:

COMPUTER HUMOR
P.O. BOX 850
PARK CITY, UTAH 84060

CC03

CompuCover™

COVER YOUR INVESTMENT

- Static Free
- Cloth Backed Vinyl
- Custom Fitted
- Clear Plastic

WE COVER ALL SYSTEMS
FROM ADDS TO ZENITH

1-800-874-6391
ORDER LINE

Dealer Inquiries Invited

CompuCover
P.O. Box 324 Dept. B
Mary Esther, FL 32569

Customer Service
(904) 243-5787
Telex 466782

CALL TOLL FREE

Menumen
COMPUTER SERVICE

VILLAGE DATA CENTER
P.O. BOX 1023
JOSHUA TREE, CA 92252

Choose from Our Menu

Monday-Friday
8:00 AM — 5:00 PM

Our sales staff is happy to take your order.

#1 Medical
#2 Dental
#3 CAD Programs
#4 Construction Accounting
#5 School Administration
#6 Word Processing
#7 General Accounting

The above items are now being served for customers of the Apple and IBM PC Computers.

To make reservations, or to inquire about our weekly SPECIALS.

Call
(619) 365-6868

VISA

CIRCLE 426 ON READER SERVICE CARD

DISKETTES

maxell | VERBATIM

100% ERROR FREE | DATALIFE

5¼ SS/DD
28.95 (BOX 10)

5¼ SS/DD
24.95 (BOX 10)

CAPTAINS SPECIAL

BUY ONE BOX MAXELL GET 10% OFF 2nd BOX

CAPTAINS SPECIAL

VERBATIM HEAD CLEANING KIT
8.95 WITH PURCHASE OF DISKS
MX - 80 CARTRIDGE
4.95 EA

W.C. VISA C.O.D.

ADD $3.00 SHIP
3% TAX IN FLA

800-327-1013

MEGA-BYTE DEPT. CC
4000 S.W. 34th STREET
POST OFFICE BOX 02874
GAINESVILLE, FLORIDA 32604

NEW!

3M

DISKETTES
STARTING FROM
$1.85 EA

- Free Hub Ring
- Improved Jacket
- 100% Error Free
- Superior Platter

TO ORDER CALL
MI 1-800-632-2468
US 1-800-258-0028

Precision Data Products
P.O. Box 8332
Grand Rapids, MI 49508-0332

Verbatim
flexible disks

Call Free **(800) 235-4137** for prices and information. Dealer inquiries invited. C.O.D. and charge cards accepted.

VISA

PACIFIC EXCHANGES
100 Foothill Blvd.
San Luis Obispo, CA
93401 In Cal. call
(800) 592-5935 or
(805) 543-1037.

CIRCLE 413 ON READER SERVICE CARD

GLOUCESTER COMPUTER

FD1/FA, all features of Promqueen less mimic mode. Software enhanced to include EPROM QC utilities, RS-232 communication, printouts. 28 pin ZIF socket. Reads, edits runs and programs all 5 volt 2500 and 2700 series EPROMS plus variety of EEPROMS all without personality modules. Commodore C-64 host computer. Inquire about the mimic mode capability in our VIC Promqueen.

$299.00

ROM Packs industrial quality circuit cards are socketed, solder masked, fully bypassed, and include a ground plane for low noise operation. Includes 1 EPROM. 8K & 16K models for VIC-20 and C-64. Specify 2732 or 2764 EPROM type. Molded plastic case.

$39.00

GLOUCESTER COMPUTER
1 Blackburn Center, Gloucester, MA 01930 617-283-7715

CIRCLE 425 ON READER SERVICE CARD

RIBBON CARTRIDGES

PRINTER MODEL (Contact us if your printer is not listed. We have ribbons FOR MOST PRINTERS)	NEW REPLACEMENT CARTRIDGES Price each in Qty. 3	6	12
ANADEX 9500	12.00	11.50	11.00
CENTRONICS 704 (7-mag)	7.50	7.25	6.75
C. ITOH Prowriter	8.75	8.50	8.00
C. ITOH Starwriter	5.50	5.25	4.75
COMMODORE Pet 8023P	9.00	8.75	8.00
EPSON MX 70 / MX 80	5.50	5.25	5.00
EPSON MX 100	11.00	10.50	10.00
IDS Paper Tiger 460/560	7.75	7.50	7.00
NEC 5500/7700 Nylon	6.00	5.75	5.25
Multistrike	5.50	5.25	4.75
Multistrike High Yield	6.00	5.75	5.25
OKIDATA Microline 84	6.00	5.75	5.25
80, 82, 83, 92, 93	3.00	2.75	2.25
QUME Nylon	5.25	5.00	4.50
QUME Multistrike	5.00	4.75	4.25

CHECK, M.O., C.O.D., VISA or MASTERCHARGE

Free shipping pre-paid orders VISA $1.50 include expiration date C.O.D. add $3.00 Phone 6-9 pm Mon.-Fri. 9-5 Sat.

ADEL COMPUTER MART (302) 492-8463
Dept. 60 Box 195 ● Hartly, DE 19953

$179

For $179 our TYPE & PRINT turns the Olivetti Praxis typewriter into the perfect printer for your personal computer. Best of all, our cable simply PLUGS ON ... no soldering! And it's smart enough to be fully compatible with most systems.

Applied Creative Technology Inc

800-433-5373
(817-261-6905)

PROMPT DELIVERY! AND TRY TO BEAT THESE IC PRICES

DYNAMIC RAM		
64K	200 ns	$5.25
64K	150 ns	5.45
64K	120 ns	6.00
16K	200 ns	1.49
EPROM		
2764	250 ns	$6.35
2732	450 ns	3.89
2716	450 ns	3.19
2532	450 ns	4.60
STATIC RAM		
6264P-15	150 ns	$38.00
6116P-3	150 ns	5.00
2114	200 ns	1.55
Z80A FAMILY		
CPU, CTC, or PIO		$3.39
DART		7.99
DMA or SIO-0		12.50

MasterCard/VISA or UPS/CASH/COD
Factory New, Prime Parts

MICROPROCESSORS UNLIMITED
24 000 South Peoria Ave
BIXBY, OK 74421
(918) 267-4961

Prices 2/15/83

Prices subject to change. Call for volume prices. Subject to available quantities. Shipping & insurance extra. Cash discount prices shown. Please expect higher prices on some parts due to world wide shortages.

MAKE BIG MONEY!

★ SELL VIDEO GAME SOFTWARE ★

...Spare Time In Friends and Neighbors
Make $50–$100–$200 Per Week

NO MONEY NEEDED TO START
No Minimum Order • No Risk • No Age Limit

Become a Part-Time Video Game Dealer. Buy at the new Video Game Software at Low Dealer Wholesale Prices (Example: WIZARD, retail price $49.95, your cost is $29.95. You sell at $34.95 and make $5.00 a game — your customer saves $15.00). No money needed to start! Sell ATARI VCS, 5200 400/800, COLECO, INTELLIVISION, APPLE, COMMODORE 1515-80, TI, etc. Be the first Dealer in your area.

Limited Offer—ACT NOW for Special Dealer Kit — only $4.95. Dealer Kit includes everything you need to get started — Order Forms, Confidential Dealer Prices, Sales Manual, Ad Kit and much more! UNCONDITIONAL GUARANTEE or Full Refund

MAIL $4.95 T-O-D-A-Y TO:
GAMES
Computer Games, Inc.
DEPT CC2, BOLTON, MASS. 01740

OR CALL:
(617) 897-5555

COLUMBIA DATA PRODUCTS MPC 16-BIT COMPUTER

Compatible with IBM-PC ' hardware and software (a cost effective alternative)

Now available in portable and desktop models, with 128 K memory plus 1 or 2 320 K floppy disks and/or 10 megabyte hard disks.

Complete dual-drive systems start at $2995, including printer and software package worth $3000.

Sounds too good to be true? Call us to arrange a free demonstration! Also ask about the PC compatible attache portable computer. (8 to 16 bit models)

ALPHA-TEXT LTD.
10905 Ft. Washington Rd.
Ft. Washington, MD. 20744

(301) 292-7330

VISICORP
PERSONAL SOFTWARE

WORD PROCESSING

SAVE $335.00 when you buy the VisiWord and VisiSpell Programs for the IBM PC. We will give you a free VisiSpell Program when you buy VisiWord at our low price of $264.50. Offer good only while supplies last. Visa & Master Cards accepted. Call (800)235-4137 to order. In CA call (800)592-5935.

Scotch Diskettes

Rely on Scotch® diskettes to keep your valuable data safe. Dependable Scotch diskettes are tested and guaranteed error-free. The low abrasivity saves your read/write heads. They're compatible with most diskette drives.

(800)235-4137

VISA

Dealer inquiries invited.

PACIFIC EXCHANGES
100 Foothill Blvd.
San Luis Obispo, CA
93401 In Cal. Call
(800) 592-5935 or
(805) 543-1037

CIRCLE 413 ON READER SERVICE CARD

SAVE 50%
on
Scotch®
Diskettes
Dealer Inquiries Invited
5¼" Specify Soft or 16 Sector
Prices 10
740 1 side 00 dens $23 30
745 2 sides dbl dens $31 00
746 1 side Quad 96 tpi $33 80
747 2 sides Quad 96 tpi $45 50
8" Specify Soft or 32 Sector
740 1 side sgl dens $23 60
741 1 side dbl dens $29 00
743 2 sides dbl dens $37 80
Checks VISA MC C.O.D. Add $2 Shipping
Call or write for our complete list
LYBEN COMPUTER SYSTEMS
27204 Harper Ave. St Clair Shores, Mi 48081
Phone: (313) 777-7780
Authorized Distributor for Information Processing Products 3M

CIRCLE 421 ON READER SERVICE CARD

Sure
it's insured?
SAFEWARE™ Insurance provides full replacement of hardware, media and purchased software. As little as $35/yr covers:
• Fire • Theft • Power Surges
• Earthquake • Water Damage • Auto Accident
For information or immediate coverage call:
1-800-848-3469
(In Ohio call 1-800-848-2112)
SAFEWARE
COLUMBIA NATIONAL GENERAL AGENCY

CIRCLE 422 ON READER SERVICE CARD

3M Scotch DISKETTES
DCS
DISTRIBUTED COMPUTER SUPPLY CORP.
477 E. Butterfield Rd.
Lombard, IL 60148
Free Calculator from 3M with 5 box order!
Tell it's worth remembering, it's worth 3M diskettes
STOCK UP ON 3M/SCOTCH DISKETTES AT UNBELIEVABLY LOW PRICES DURING THIS SPECIAL OFFER!
Prices Ea. (10 Per Box)
Description
List Price
Your Cost 10-40
Your Cost 50+
5¼" Single Side Double Density $ 4.00 $2.80
5¼" Single Side Double Density 6.00 3.25 3.10
5¼" Double Side Quad 96 TPI 8.00 3.70 3.50
5¼" Double Side, Quad 96 TPI 7.60 4.35 4.20
8" Single Side Single Density 4.40 2.40 2.30
8" Single Side Double Density 5.50 2.95 2.90
8" Double Side Double Density 7.70 3.90 3.75
5¼" and 8" Head Cleaning Kits 33.30 15.75 —
Authorized Distributor Information Processing Products 3M
MasterCard, Visa, C.O.D. or Net 30 days with Approved Credit
All diskettes will ship the same day via UPS. UPS charges will be added to your invoice. Diskettes are packaged in a 2 piece hi-cesbin storage box. All products are 100% guaranteed error free.
Call for a free copy of our full line Catalog!

CIRCLE 423 ON READER SERVICE CARD

A.T.I.L.A.-APPLE THREADED INTERPRETIVE LANGUAGE
THE FORTH FOR THE APPLE™
"Incredible Features at an Incredible Price"
• Complete Forth Word Set
• Full Screen Editor
• Complete Structured 6502 Macro Assembler
• Hi-Res Graphics
• Floating point with all popular functions
• Complete self contained DOS
• Interface to DOS 3.3 Files
• Fifty+ Page Manual
• Strings, Array, Case, Lo-Res, Sound Words, and More!
COMPLETE! 29.95 NJ residents incl. 6% Sales Tax
Minimum system: Apple II, II Plus, or IIe w/48K and one disk drive; can use language card and more disk drives if available.
Visa/MasterCard accepted; incl card #, exp. date and signature, or send check or M.O. to:
TERRY BROTHERS SOFTWARE
P.O. BOX 29, ROOSEVELT, NJ 08555
(609) 799-9190

CIRCLE 423 ON READER SERVICE CARD

TRS-80 MODEL 4
Word Processing Program
L Soft
FREE!
NOW 80 x 24 DISPLAY
ONLY $99.95
Works with TRSDOS 4.0
80K TEST BUFFER when expanded memory is installed
Built-in FORM LETTER and MAIL MERGE capabilities
Performs PROPORTIONAL SPACE right-margin justification on Epson, NEC, Diablo, Qume and Daisy Wheel printers
Some powerful editing features as ZORLOF II, with dozens more features added
Versions also available to run on MODEL I, MODEL III, LNW-80, PMC-80, and MAX-80 (80x24 display)
Letter-quit class 7500 less than competing products mastering its capabilities
CALL 1-305-259-9397
ANTEX SOFTWARE PRODUCTS
P.O. BOX 361126
MELBOURNE, FL. 32936
FREE SHIPPING WITHIN THE U.S., ENTER THE U.S. AND EUROPE FOR SHIPPING. FLORIDA RESIDENTS ADD 5% SALES TAX. ALL ORDERS PAYABLE BY CHECK, MONEY ORDER CASH OR C.O.D.



CIRCLE 424 ON READER SERVICE CARD

Smith-Corona TP-1 Daisy Wheel Printer
ONLY $449.00
UNBELIEVABLE!
• fully-formed characters
• compatible with most micro-computers
• serial or parallel interface
• choice of 10 or 12 CM models
Also for your TP-1 letter quality printer—
the Smith-Corona Tractor Feed
• Adjustable tractor widths
• For continuous forms
• Quick, easy removal
$134.95
Call Collect
(214) 826-6521
FIGURE LOCK BUSINESS EQUIPMENT, INC.
6408 Gaston Avenue • Dallas, Texas 75214

FREE
CATALOG!
Just let us know and we'll mail you a FREE Creative Computing Catalog—16 pages filled with books, buyer's guides, magazines, and more!
To get your FREE catalog, write to: Creative Computing Catalog, Dept NA1X 39 East Hanover Ave., Morris Plains, NJ 07950.

YORK 10
CASSETTES
• LOWER PRICES
• LONGER LENGTHS
DATA TRAC C-06, C-12, C-24
From the leading supplier of Computer Grade Cassettes, new longer length C-12's (6 minutes per side) provide the extra few feet needed for some 16K programs.
• Premium 5 screw shell with leader — BASF tape
• Error Free • Money back Guarantee
SHIPPING/HANDLING $3.50
Call: 213/700-0330
YORK 10 Computerware
8525 Vessar Ave. #CR Chatsworth, CA 91311

creative computing's RETAIL ROSTER

A DIRECTORY OF STORES AND THE PRODUCTS THEY CARRY
TO PLACE A LISTING CALL COLLECT: LOIS PRICE (212) 725-4215

ALABAMA

VILLAGE COMPUTERS, 1720 28th Avenue South, Homewood, 35209. (205) 870-8943. Apple, Vector, Graphics, Peripherals, Software, Training and Service.

ALASKA

JUNEAU ELECTRONICS—1000 Harbor Wey, 99801. (907) 586-2280. Apple, Osborne Hardware/Software/Peripherals. Full Service and Support.

ARIZONA

HEATHKIT ELECTRONIC CENTERS—Heath/Zenith Computers, Software, Peripherals. PHOENIX—2727 W. Indian School Rd., (602) 279-5247. TUCSON—7109 E. Broadway, (602) 885-6773.

CALIFORNIA

D.E.S. DATA EQUIPMENT SUPPLY—6316 Firestone, Downey 90241. (213) 923-9361. VICVILLE: (714) 778-5455. Commodore PET, Commodore-64, Vic-20 specialists. Latest software, Hardware, Books, Supplies, Peripherals in stock.

VALLEJO—COMPUTER IDEAS, 1029 Tennessee St., 94590. (707) 552-5078. Commodore, Epson, Sanyo. Software/Peripherals. Full Service/Support.

CAMPBELL—DATA BANK, 394 E. Campbell, (408) 370-0199. 1000+ Apple Software, 300+ Atari Software, 300+ VIC Software, plus NEC, TRS, PC, and more. Discount prices—Expert knowledge.

STOCKTON—STOCKTON COMPUTER, 4555 N. Pershing, 95207. (209) 952-2028. Apple, Franklin, Software/Peripherals. Discount prices with full service and training!

GLENDALE—COMPUTER PALACE, 1029 E. Broadway, 91205. (213) 241-2551. Hardware/Software/Peripherals/Service. Business/Home—Best Prices!

COMPUSALES—16619 South Hawthorne Boulevard, Lawndale 90260. (213) 370-3224. IBM, Victor 9000, Basis 108, Osborne, NEC, Apple

AUBURN-AMERICAN MICROTEL, 384 Lincoln Way, Suite 328, 95603. (916) 885-1172. Apple/Franklin, Atari, Commodore, Corona, IBM. Software, Hardware, Peripherals, Books/Magazines. Classes. Research. Personalized consultation for systems tailoring. Atari Service. Factory Authorized Network.

DALY CITY—LOTUS CENTURY, 267 Lake Merced Blvd., 94105. (415) 992-5230. All major computer lines at discount rates!

SACRAMENTO—COMPUTERTIME, 6040 Greenback, Citrus Heights, 95610. (916) 969-4111. Large selection Educational/Game Software! Peripherals/Furniture/Accessories/Books.

MOUNTAIN VIEW—COMPUTER MARKET, (415) 969-3097. Call us for the best prices around! Retail and Wholesale.

ANAHEIM—SOUND ROOM, 1100 W. Lincoln, 92805. (714) 535-8621. Atari, Apple, Commodore—Hardware/Software/Peripherals. Support/Training.

HEATHKIT ELECTRONIC CENTERS—Heath/Zenith Computers, Software, Peripherals. ANAHEIM—330 E. Ball Rd., (714) 778-9420. CAMPBELL—2350 S. Bascom Ave., (408) 377-8920. EL CERRITO—6000 Potrero Ave., (415) 236-5870. LA MESA—8363 Center Drive, (714) 461-0110. LOS ANGELES—2309 S. Flower St., (213) 749-0281. PO-MONA—1555 N. Orange Grove Ave., (714) 623-3543. REDWOOD CITY—2001 Middlefield Rd., (415) 365-8156. SACRAMENTO—1660 Fulton Ave., (916) 486-1575. WOODLAND HILLS—22504 Ventura Blvd., (213) 883-0531.

THE COMPUTER STORE OF OAKLAND—Apple, KayPro, Osborne, Televideo, Texas Instruments. Classes/Services/Financing/Free Parking. 1320 Webster, (94612). (416) 763-7900.

COLORADO

ALPHA CENTER—12351 W. 64th, ARVADA 80004. (303) 421-6361. Atari, TI, Kaypro, Epson. Huge Software Selection! Repairs/Training.

HEATHKIT ELECTRONIC CENTERS—Heath/Zenith Computers, Software, Peripherals. DENVER—5940 W. 38th Ave., (303) 422-3408.

CONNECTICUT

EAST HARTFORD—COMPUTERIFICS, 358 Burnside Ave., 06108. (203) 528-9419. Atari, Epson, IBM, NEC, Okidata, Panasonic, Vector. Sales and Consulting.

THE COMPUTER ESTABLISHMENT—210 Main St., OLD SAYBROOK 06425. (203) 388-1271. Epson, NCR Decision Mate V, Televideo, Qume, Brother. Full professional support/Training.

EXEL COMPUTER CENTER—2235 Summer St., Ridgeway Center, Stamford, 06905. All lines of Apple, Hybernia, Kaypro, Texas Instruments. Big selection software/printers! Support. Personnel served.

C & E DISTRIBUTING—Edgewood Drive, Jewett City 06351. (203) 427-0657. Retail outlet and wholesaling for dealers.

HEATHKIT ELECTRONIC CENTERS—Heath/Zenith Computers, Software, Peripherals. AVON—395 W. Main St. (Rt. 44), (203) 678-0323.

MICROAGE COMPUTER STORE—345 Main Street, Danbury, 06810. (203) 797-1823. Authorized Sales/Service—IBM, Altos, Commodore. Software, Peripherals, Training.

DELAWARE

COMPUTERLAND, ASTRO SHOPPING CENTER, Newark 19711. (302) 738-9656. Authorized Sales/Service—IBM, Apple, Osborne, Software, Peripherals, Training.

FLORIDA

COMPUTER SYSTEM RESOURCES, INC.—GAINESVILLE—Butler Plaza. (904) 375-4276. Apple, Osborne, DEC. IBM. Software, Peripherals, Classes, Service.

GRICE ELECTRONICS, Fort Walton, Panama City, Pensacola 32501. 800-342-4646. (800-874-8398). Apple, Hewlett-Packard, 24 Hour Service.

FLORIDA BOOK STORE COMPUTER CENTER—1614 West University Ave., Gainesville, 32604. (904) 376-5806. Commodore, Hewlett-Packard Computers: Software and Accessories.

FAMILY COMPUTERS—4047 Bee Ridge Rd., SARASOTA 33582. (813) 921-7510. TDP-100 micro, SV-318 Computer. Peripherals/Software/Books.

FORT LAUDERDALE—THE SOFTWARE CONNECTION, 5460 N. State Road 7, 33319. (305) 484-7547. Discounted software/peripherals for TRS-80.

HOLLYWOOD—COMPUTERS 101, 101 Hollywood Fashion Center, 33023. (305) 981-1011. Franklin, KayPro, Gemini Printers, DTC Daisy Wheel Printers, ATARI, Etc.

GOERINGS' BOOK CENTER—1310 West University Avenue, Gainesville 32603. (904) 378-0363. Books and magazines. Open until 9:00. Sun 1:00 to 5:00.

HEATHKIT ELECTRONIC CENTERS—Heath/Zenith Computers, Software, Peripherals. HIALEAH—4705 W. 16th Ave., (305) 823-2260. JACKSONVILLE—8262 Arlington Expressway, (904) 725-4554. PLANTATION—7179 W. Broward Blvd., (305) 791-7300. TAMPA—4109 Hillsborough Ave., (813) 886-2541.

GEORGIA

MENTOR TECHNOLOGY, 3957 Pleasantdale Road, Atlanta, 30340, 404-447-8236. Televideo, Eagle, KayPro, OSM, TTX, Leading Edge, Prowriter, Transtar, Business Software.

HEATHKIT ELECTRONIC CENTERS—Heath/Zenith Computers, Software, Peripherals. ATLANTA—5285 Roswell Rd., (404) 262-4341.

ILLINOIS

VIDEO ETC., 465 Lake Cook Plaza, DEERFIELD, 60015, (312) 498-9669. Other locations: SKOKIE (312) 675-3655, ORLAND PARK (312) 460-9690, BUFFALO GROVE. (312) 459-6677, strong Hard/Software support for Apple, Atari, Key Pro, IBM-PC

LOMBARD—COMPLETE COMPUTING—990 E. Roosevelt 60148. (312) 620-0808. Apple, Atari, NEC, Altos, Osbsyte; Software, Peripherals, Classes.

FARNSWORTH COMPUTER CENTER—1691 N. Farnsworth Ave., Aurora 60505. (312) 851-3868 and 385 E. North Ave., Villa Park 60181. (312) 833-7100. Mon.-Fri. 10-8, Sat. 10-5. Apple, Fortune, Hewlett-Packard Series 80 Systems, HP Calculators, IDS Prism, SMC, Daisy Writer Printers.

DIGITAL WORLD—ADDISON, 711 Army Trail Rd., 60101, (312) 628-9222. Atari, Commodore, Franklin, NEC, Xerox, Zenith and more. Books/Magazines. Full Service and Training.

COMPUTERLAND/NORTHBROOK—3065 Dundee Road 60062. (312) 272-4703: IBM, Apple, DEC, Osborne, Altos, Compaq, Software, Peripherals, Service.

THE SOFTWARE STORE—Glenview—1787 Glenview Road, 60025. (312) 724-7730. Microcomputer Software: Apple, IBM, CP/M, more. Special order Specialists! Open Mon.-Sun.

NILES—COMPUTERLAND—9511 N. Milwaukee Ave. 60648. (312) 967-1714: Apple, IBM Personal, Cromemco, Fortune, Osborne, Otrona: Software.

DATA DOMAIN OF SCHAUMBURG, 1612 E. Algonquin Rd., Schaumburg 60195. (312) 397-8700, 12-8 Mon.-Fri., 10-5 Sat. Authorized Sales and Service for Apple II, Apple III, LISA, Osborne and Alpha Micro Computers. Hewlett-Packard Calculators and accessories. Largest Book and Magazine selection in Midwest. VISA, MC, Amer. Exp. accepted for phone orders.

INDIANA

EMPRISE COMPUTER SYSTEMS INC.—5967 E. 82nd St., Indianapolis, 46250. (317) 842-8488. Atari computers, software, peripherals, games, accessories, classes.

BYTREX COMPUTER SYSTEMS—5958 Stellhorn Rd., Fort Wayne 46816. (219) 485-7511. Atari, Zenith, Sony, Televideo. Hardware/Software, Sales & Service.

IOWA

AMERICA'S COMPUTER SYSTEMS, Amory Building, Decorra 52101; (319) 382-8800. Access, Epson (Printers and Computers), Typesetting and Agricultural Software.

KANSAS

MISSION—HEATHKIT ELECTRONIC CENTER, 5960 Lamar Avenue 66202. (913) 362-4486 Heath/Zenith Computers. Software, Peripherals, Service.

KENTUCKY

SOUTHERN COMPUTER SYSTEMS—SHELBYVILLE, 630 Main Street, 40065, (502) 633-5639; LOUISVILLE, 10474 Blue Grass Parkway, 40299, (502) 491-7704. Microcomputers: Northstar, TRS-80, Kaypro, Franklin. Peripherals: Okidata, C. Itoh, Corvus. Software: All major brands. Turnkey Systems. We service all major brands!

LOUISVILLE—HEATHKIT ELECTRONIC CENTER—12401 Shelbyville Road, 40243, (502) 245-7811. Heath/Zenith Computers, Hero Robots, Software, Peripherals.

LOUISIANA

COMPUTERLAND/LOUISIANA—312 St. Charles, New Orleans 70130. (504) 522-2285. IBM, Apple, Osborne, Fortune, Vector. #1 in service.

MARYLAND

OLNEY COMPUTERS, 3414 First Ave., Olney 20832. Discount prices on Atari, NEC, Epson, Okidata, Commodore, Amdek.

BASIK COMPUTERS INC., 518 Firstfield Road, Gaithersburg 20878. (301) 540-0412. Epson HX-20 & QX-10. Franklin, Victor & others. Hardware, Software, Books & Supplies; Apple & IBM compatibles. Call for Discount prices.

HEATHKIT ELECTRONIC CENTERS—Heath/Zenith Computers, Software, Peripherals. BALTIMORE—1713 E. Joppa Rd., (301) 661-4446. ROCKVILLE—5542 Nicholson Lane, (301) 881-5420.

MASSACHUSETTS

SCIENCE FANTASY BOOKSTORE—18 Eliot St., Harvard Square, Cambridge 02138. (617) 547-5917. 11-6 Monday-Saturday till 8 Thursday. Apple, Atari, IBM, TRS-80, and Commodore 64 strategy and adventure games.

BURLINGTON/SOFT SUPPLY & SYSTEMS, 68 Middlesex Tpk., 01803. (617) 229-6666. Supporting, IBM, NEC, Digital, Seiko, Chameleon.

EXECOM-68 Middlesex Tpk., 01803. (617) 229-6666. New Store! 56 High Street, Boston 02110. (617) 423-9666. Both locations supporting IBM, NEC, DEC, WANG.

HEATHKIT ELECTRONIC CENTERS—Heath/Zenith Computers, Software, Peripherals. PEABODY—242 Andover St., (617) 531-9330. WELLESLEY—165 Worchester Ave., (617) 237-1610.

RAM COMPUTER CENTER—ACTON, 427 Great Road, 01720: (617) 263-0418. N.E.'s Largest Selection of Personal Computer Software.

MICHIGAN

DETROIT—HEATHKIT ELECTRONIC—E. Detroit 48021: 18149 E. Eight Mile (313) 772-0418—Detroit: 18645 W. Eight Mile (313) 535-8460.

COMPUTERLAND—22000 Greater Mack Avenue, St. Clair Shores, 48080. (313) 772-8540. Altos, Apple, Compaq, DEC, Epson, Fortune, IBM, Otrona.

COMPUTER CONTACT—3017 East Hill, Grand Blanc 48439. (313) 694-3740. Apple, Altos, Software, Peripherals, Service. Business/Education/Personal.

COMTEC COMPUTER SALES—518 Adams Street, Owosso, 48867. (517) 725-7326. For sales, service, consultation in IBM, Apple, Epson.

SOUTHFIELD—MICRO STATION SOFTWARE CENTER. A large selection of Software, Supplies & Peripherals. 24484 West 10 Mile, 48034. (313) 358-5820.

MISSISSIPPI

COMPUTERLAND — IBM / OSBORNE / SOFTWARE / Training/Service/Books/Magazines. 1652 Highway #1 South, Greenville, MS 38701.

MISSOURI

COMPUTER ANNEX—411 South Campbell, Springfield 65806. (417) 864-7038. Franklin, Epson, Hardware/Software, Service, Supplies, Classes.

COMMONWEALTH COMPUTERS—Blue Ridge Plaza, Kansas City 64151. (618) 356-8502. Indian Creek Shopping Center, Overland Park 64133 (913) 648-6088. Epson; Kaypro; Commodore; Onyx. Service. Training.

MONTANA

THE COMPUTER STORE—BILLINGS, 1218 18th St. West, 59102. (406) 245-0092. Apple, Kay Pro, Hewlett Packard, Commodore. Hardware/Software/Peripherals—Service/Training.

NEW HAMPSHIRE

COMPUTER MART OF NEW HAMPSHIRE, 170 Main St., Nashua, 03060. (603) 883-2386 THE Apple Specialists. Full line Hardware/Software. Training/Service

VIDEO STORE—140 Congress, Portsmouth 03801. (603) 431-1211. Osborne and Epson OX-10 for your business/home Software Supplies

NEW JERSEY

SOFTWARE MART—352 Bloomfield Avenue, Caldwell 07006. 201-228-4949. Software for Apple, Atari, TRS-80, 20-20% off list.

COMPUTERLAND/EATONTOWN—I.B.M.P.C. Compaq; Apple, DEC, Service; Leasing; Training; Software. 288 Route 35, 07724. (201) 389-2333.

RED BANK—FELICE'S FOLLIES. 88 Broad St. 07701, (201) 842-2662. Atari, VIC20/64, 1199. Times/Sinclair, Hardware & Software / Peripherals-Demonstrations, Books/Magazines. Most Complete Micro Store In Monmouth County + Competitive prices

PARSIPPANY—COMPUTER NOOK. New location!—160 Route 48 West, 07054. (201) 575-9488. Apple, DEC, Otrona. Sales/Service/Support.

COMPUTERLAND, 35 Plaza, Rt. 4 West Paramus, 07652. (201) 845-9303. Apple, IBM, DEC, etc. We know small computers.

TRANSNET COMPUTER STORE—1945 Route 22, Union, NJ 07083. (201) 688-7812. 1111 Route 35 N., Ocean, NJ (201) 531-7020. Apple, DEC, TI, HP, Osborne + Hardware/Software/Peripherals/Accessories. Full on-site service. Training.

STONEHENGE COMPUTER CORP., 89 Summit Ave., Summit 07901. (201) 277-1020. 10-5:30 M-F, 10-5 Sat. Apple. IBM, Wicat. Authorized Dealer Sales and Service.

WAYNE SOFTWARE—1459 Route #23, Wayne 07470. (Across from Packanack Center) Books, Programs, Discount Prices! (201) 828-7318.

HEATHKIT ELECTRONIC CENTERS—Heath/Zenith Computers, Software, Peripherals. ASBURY PARK—1013 State Hwy. 35, (201) 775-1231. FAIR LAWN—35-07 Broadway (Rt. 4), (201) 791-8935.

NEW YORK

COMPUTER WORLD—5464 W. Quaker St., Orchard Park, 14127. (718) 882-4141. M-F: 9-9, Sat: 9-5. Atari, Commodore—VIC-20, 64 Epson HX20, OX10 computers, and printers. Hardware/Software.

COMPUTER DISCOUNT SERVICES. 448 West 55th St., New York, 10019 212-757-8898 Timex Sinclair, Atari, Texas Instruments Hardware, Software, Peripherals.

LEIGH'S COMPUTERS, 312 East 85 Street, New York City 10028. (212) 879-8257 Apple. Atari, Franklin, VIC 20, Commodore 64.—Hardware/Software. IBM Software. All Peripherals. Discount prices.

PLATTSBURGH—U-COMPUTE, 582 Cornelia Street, 12901. 563-1679. Apple, Vector, Kaypro. School, Full Service Support, Full-Time Technician.

MERRICK—VIDEO CONNECTION, 27 Merrick Ave., 11566. (516) 546-5060. Atari, TI, Panasonic. Hardware/Software. Books/Magazines. Software try-out available!

SOFTWARE EMPORIUM—151 Mineola/Willis Ave., Roslyn Heights, 11577 (516) 625-0550 LARGEST SELECTION OF SOFTWARE in L.I. Apple, Atari, TI, Commodore, IBM and more + hardware/peripherals/books/magazines.

BUFFALO—DEPEW COMPUTER SYSTEMS, 4891 Transit Rd., 14043. (718) 688-5995. Complete line of Apple Computers, Software and Peripherals. Service and Classes!

FARMINGVILLE-DATASCAN COMPUTER SYSTEMS, 2306 N. Ocean Ave., 11738. (516) 898-8285. Atari, NEC, KAYPRO, APPLE Compatibles. Business Systems. Software/Peripherals/Service/Classes

JERICHO—HEATHKIT ELECTRONIC CENTER, 15 Jericho Turnpike, (518) 334-8181. Heath/Zenith Computers, Software, Peripherals. Educational Classes.

WATERTOWN—NORTHERN COMPUTERS, Stateway Plaza, 13601. (315) 782-6808. Apple—Software/Peripherals. Full Service. Training is our specialty!

ALPHA STEREO—345 Cornelia Street, Plattsburgh 12901, (518) 561-2690. Atari computers and software Weekdays 10-8, Sat. 10-8, Sun. 12-5.

COMPUTERWARE—2384 Hempstead Turnpike, East Meadow, 11554; (518) 731-7939. Large selection of Apple, Atari, Commodore software. Featuring education, utility and games. Call for the latest software releases. Authorized Franklin Ace service.

HEATHKIT ELECTRONIC CENTERS—Heath/Zenith Computers, Software, Peripherals. ALBERT—3476 Sheridan Dr., (718) 635-3090. ROCHESTER—937 Jefferson Rd., (718) 424-2560. N. WHITE PLAINS—7 Reservoir Rd., (914) 761-7890.

NORTH CAROLINA

HICKORY—SIMPLIFIED SOFTWARE. 118 Third Avenue, N.W. 28601. (704) 328-2387. Authorized Zenith Data Systems Dealer Software for Z100. IBM/PC Custom Programming.

HEATHKIT ELECTRONIC CENTERS—Heath/Zenith Computers, Software, Peripherals. GREENSBORO—4820 W. Market St., (919) 299-5390.

OHIO

ABACUS II—1417 Bernath Pkwy., TOLEDO 43615, (419) 865-1009. 4751 Monroe St. (419) 471-0082. 10-8, 10-9 Thursdays. IBM-PC, Epson, Apple, Osborne, Lisa.

BARNHART COMPUTER CENTER—548 N. Main, Urbana 43078. (513) 853-7257. ATARI, KeyPro Portable, Columbia (IBM Compatible). Timex/Sinclair.

NORTH COAST COMPUTERS, 850 Dover Center, Bay Village 44140. 216-835-4345. 10-8 Mon-Fri, 10-6 Tuesday, 9:30-5 Saturday. Apple, Osborne, Vector Graphics, Altos.

TOLEDO—HEATHKIT ELECTRONIC CENTER, 48 South Byrne Rd., 43615, (419) 537-1887. Heath/Zenith Computers, Software, Peripherals.

COLUMBUS—HEATHKIT ELECTRONIC CENTER, 2500 Morse Rd., (614) 475-7200. Heath/Zenith Computers, Software, Peripherals, Robotics, Training.

AKRON—DATA MANAGEMENT SYSTEMS, 3979 W. Market St., 44313. (218) 836-3228. Atari, Commodore, OSI, NEC & more. Factory authorized dealer/repairs. Software development marketing, systems analysis.

NORTH CANTON—THE COMPUTER STORE, 118 7th St. N.W., 44720. (216) 497-0299. Franklin, Atari, Televideo, Epson, IDS. Full Service/Classes.

COMPUTER CORNER—5104 Mayfield Rd., LYNDHURST 44124. (216) 473-5010. Commodore, NEC, SKS, Atari, Epson, Star. Hardware/Software/Peripherals. Authorized Service—Training/Classes.

OKLAHOMA

TULSA—ABS COMPUTER CENTER—8518-E East 71st (74133), (918) 252-1604: Atari, Apple, Hewlett-Packard. Software, Peripherals, Training.

HEATHKIT ELECTRONIC CENTERS—Heath/Zenith Computers, Software, Peripherals. OKLAHOMA CITY—2727 Northwest Expressway, (405) 848-7593.

TULSA—THE COMPUTER MART, 3003 E. 51st St., 74105. (918) 884-8452. Victor 9000, NorthStar, Atari—Hardware/Software/Peripherals/Supplies/Books/Magazines & Service!

OREGON

CONTEMPORARY COMPUTERS—1476 Willamette, Eugene, OR 97401. KAYPRO, Chameleon, Vector Graphic, Altos, Molecular, NEC APC.

PENNSYLVANIA

CALDWELL COMPUTER CORP., 8720 Rising Sun Ave. Philadelphia 19111. (215) 742-8900 Apple, Commodore, Percom, Zenith Sales/Service.

HARRISBURG AREA—1-STOP COMPUTER SHOPPE, 65 N. 5th St., LEMOYNE 17043. (717) 781-8754. Full line dealers for Commodore, Osborne, Zenith. Software/Peripherals—Service/Training.

MARKETLINE SYSTEMS INC. 975 Jaymor Rd., Southampton, PA 18966. (215) 355-5400. We sell and service MicroComputers and peripherals. Related books/magazines available.

PERSONAL SOFTWARE, 146 Paoli Pike, Paoli, 19355. (215) 296-2728. Software Specialists. Custom Programs, Canned Programs and Peripherals.

SOFTWARE-N-STUFF—1111 Easton Rd., Warrington, 18976. (215) 343-3536 Franklin, Okidata Printers + largest selection of software in Bucks County!

HEATHKIT ELECTRONIC CENTERS—Heath/Zenith Computers, Software, Peripherals. PHILADELPHIA—6318 Roosevelt Ave., (215) 288-0180. FRAZER—630 Lancaster Pike, (Rt. 30), (215) 847-5555. PITTSBURGH—3482 Wm. Penn Hwy., (412) 824-3064.

THE TOY STORE AND COMPUTER CENTER—3878 Washington Rd., McMurray, 15317. (412) 941-2029. Total availability of software/hardware: for Atari, C-B-M, Adam, TI., IBM, Apple, Kaypro, Televideo, for business or pleasure. Sales, Guidance, Support.

RHODE ISLAND

COMPUTOPIA, 653 North Main Street, Providence, RI 02906, (401) 274-0330. Computer and peripherals specialist. Full Service, Classes

HEATHKIT ELECTRONIC CENTERS—Heath/Zenith Computers, Software, Peripherals. WARWICK—558 Greenwich Ave., (401) 738-5150.

UTAH

SALT LAKE CITY—SERVICE WEST OF UTAH, 3532 S.W Temple, 84115. (801) 282-4089. Quality repair of all disk drives. Authorized ATARI Service.

HEATHKIT ELECTRONIC CENTERS—Heath/Zenith Computers, Software, Peripherals. MIDVALE—58 East 7200 South, (801) 566-4828.

VERMONT

MONTPELIER, TIRONE'S INC., 22 Langdon Street 05602, (802) 223-5063. Atari, TI 99/4A Peripherals, Software, Training. Authorized Atari Service Center.

VIRGINIA

COMPUTERS ETC. 8671 Backlick Rd., Springfield, 22150. (703) 644-5500. Cromemco, Osborne, Northstar, Seequa. Sales/Service/Training.

HEATHKIT ELECTRONIC CENTERS—Heath/Zenith Computers, Software, Peripherals. ALEXANDRIA—8201 Richmond Hwy., (703) 765-5515. VIRGINIA BEACH—1055 Independence Blvd., (804) 480-0997.

WASHINGTON

COMPUTERS +, 2504 Jefferson Avenue, Tacoma, 98402. (208) 272-2329. Atari/Commodore Computers. Atari/Commodore/TRS-80 Software. Supplies.

SEATTLE—PROGRAMS PLUS, 18850 Southcenter Pkwy., 98118 (206) 575-1375. Apple, Atari, IBM, TRS-80, CP/M, Commodore—Software/Peripherals/Books. Open 7 days/wk.

CREATIVE COMPUTERS-KENT, 1415 West Meeker, 98031, (206) 854-7929, SEATTLE, 10732 Fifth Street, 98124, (206) 365-6502. ATARI, KAYPRO 2, FRANKLIN. Peripherals, software. SERVICE, TRAINING!

HEATHKIT ELECTRONIC CENTERS—Heath/Zenith Computers, Software, Peripherals. SEATTLE—505 8th Ave., North, (206) 882-2172. TUKWILA—15439 53rd Ave South, (206) 246-5358. VANCOUVER—518 S.E. Chkilov Dr., (206) 254-4441.

YAKIMA—ROB ROY COMPUTER SHOP—1109 West Yakima Avenue 98902. (509) 575-7704. Northstar, Atari, Software, Peripherals, Megazines.

LYNNWOOD—MEDIA MAN—18500 33rd W., Suite B-2 (In the Alderwood Plaze). 208/775-8544. Software end supplies for Apple, Atari, IBM, Commodore

WISCONSIN

MILWAUKEE—HEATHKIT ELECTRONIC CENTER, 5215 W. Fond du Lec.(414) 873-8250. Heath/Zenith Computers, Software, peripherals, robotics

MAGIC LANTERN, 406 South Park Street, Madison 53715. (608) 251-9112. Atari, Timex, Commodore, Texas Instruments. 700 programs in store

CANADA

ARKON ELECTRONICS LTD.—409 Queen St. West, Toronto M5V 2A5, (416) 593-8502. Apple dealer, Software/Hardware for Apple, Atari, VIC-20, TRS-80, and more Books/Megazines. U.S. Inquiries

SOFTRACK SOFTWARE, 519 King Street West, TORONTO M5V 1K4, (416) 596-8911. Apple, IBM, Atari, TRS-80, CPM. Business/Eduction/Graphics/Games. Service and Training. U.S. Inquiries

BYTE SHOP—VANCOUVER, 2151 Burrard Street, V6J 3H7, (604) 736-2181. Apple Authorized National Account Dealer. DEC, IMS, Morrows Hardware/Software, Service/Training. U.S. Inquiries.

MICRO SHACK OF WESTERN CANADA—PARK ST. REGINA SK S4P 3N6 (306) 543-4079. Commodore Computers/Supplies, Epson Printers, Service/Training. VISA/MC accepted. U.S. Inquiries.

MINTRONICS COMPUTERS—1440 Kingsway, Vancouver V5N 2R5 (604) 872-5814. Apple Authorized Sales & Service Center. Peripherals/Printers. Training. U.S. Inquiries

SABRE COMPUTER SYSTEMS—Unit #1—2810 St. John St., Port Moody, B.C. V3H 2C1. Hardware/Software/Peripharals for business, education and home. Apple, Atari, Commodore, IBM and more. Full Service/Support/Training & Mail Order. U.S. Inquiries

creative computing CLASSIFIED

CLASSIFIED RATES: Per Word, 15 Word Minimum: **REGULAR: $2.85. EXPAND-AD®: $4.28.** Ads set in all bold type at 20% premium. Ads set with background screen @ 25% premium. **GENERAL INFORMATION:** Prepayment discounts available. Payment must accompany order except credit card—Am. Ex., Diners, MC, VISA (include exp. date)— or accredited ad agency insertions. Copy subject to publisher's approval; must be typewritten or printed. First word set in caps. Advertisers using P.O. Boxes MUST supply permanent address and telephone number. Orders not acknowledged. They will appear in next available issue after receipt. Closing date: 5th of the 3rd month preceding cover date (e.g., April issue closes Jan. 5th). Send order & remittance to: Classified Advertising, **CREATIVE COMPUTING** Magazine, 1 Park Avenue, New York, N.Y. 10016. Direct inquiries to: (212) 725-3927.

SOFTWARE

FREE SOFTWARE DIRECTORY Detebese meneger, mailing list, inventory, accounting, peyroll. TRS-80, sa-rcox, IBM-PC, Long SASE. 374 Micro Architect, 98 Dothen, Arlington, MA 02174. 817-643-4713.

VIC-20 TRS 80 SOFTWARE, HARDWARE—Morse code, RTTY, EPROM, programmer memory. FRANK LYMAN, P.O. Box 3091, Ivanhue, NH 03081

VIC-20 OWNERS—FREE animated catelog cassette $1 postage/handling M Pescell Software, Box 1143-C, Santee, CA 92071.

ATARI, APPLE, IBM-PC: Extensive line-educational, entertainment, business. FREE BROCHURE. New Dimension Software, 39010 Baroque, Mt. Clemens, MI 48044.

TI-99/4A PROGRAMMERS: Affordable Software! Catelog, only $1. PROGRAMS SOFTWARE, 1435 Burney Squere North, Columbus, OH 43229.

TI 99/4A SOFTWARE. Free price list plus newsletter. Glen Dobbs, Box 801CC-1, Sante Maria, CA 93458.

FREE CATALOG. Small business, home menegement, educational software for VIC-20/64. ECP, Box 88, Little Neck, NY 11363.

VIC-20/COMMODORE-64 Educational Software designed by teechers. Free catelog. ATHENA SOFTWARE, 727 Swarthmore, Newark, DE 19711.

ATTENTION: TI99/4A: SINCLAIR TS/1000, COMMODORE VIC-20/64, APPLE. ATARI 400/800 USERS! Super Software Selection! Send $1.00 for CATALOGUE State make, model. Alpha Software, 182 Chapel Drive, Churchville, PA 18966

ULTIMENU FOR DOS simplifies IBM's, PC-DOS to meet your needs. $24.95. DB/DC Software Associates, P.O. Box 4895, Manchester, NH 03108.

TI99/4A OWNERS: Entertainment and educational software. For listing send SASE to Roden Computing, P.O. Box 77, Emory, TA 24327.

TI-99/4A owners. Send for free list of new and exciting, low cost software DYNAMO, Box 124, Hicksville, NY 11801.

CHECK OUR SOFTWARE PRICES FIRST! Business-Education-Games for all popular computers. Free brochure. LOG-ON, Box 747, Winchester, CA 92395. (714) 928-1141.

FLOPPY DISKS for Apple s, TRS-80's, Commodore's, Atari's, IBM's, etc.—10 disks/Box SS/DD-BASF/$20.00-Wabash/$20.00-Scotch/$23.00-Memorex/$25.50-Maxell/$28.00-Dysan/$35.00—Double side and 8" also available. Shipping $2.50/order. Add N.J. sales tax if applicable. COMPUTER DISK, 24 Washington Ave., Lake Hiewethe, NJ 07034

FREE EDUCATIONAL SOFTWARE CATALOG—Pet, Commodore 64, Apple II+, TRS-80—Island Software, PO Box 300, Dept. G, Lake Grove. NY 11755. (518) 585-3755.

AIR NAVIGATION TRAINER—The most realistic program available for learning flight navigation. $40. (Apple). Space-Time Associates, 20-38CC Country Club Drive, Manchester, NH 03102 (603) 625-1094.

DON T BUY—RENT. Game Cartridges TI99, Atari, Vic, Commodore. $1.00 for list and details . RUSOL, Box 1668cc. Meriden, Connecticut 06450.

EDUCATIONAL SOFTWARE—Commodore 64, Vic-20. 10 programs/$15. Specify machine, grade level. Free catelog. Byte By Byte, 1183 West 1380 North, Provo, Utah 84604

PERRECT FOR SMALL BUSINESS—TRS-80 Model III/IV Bookkeeper Time Doma hes pre-loaded files. SCRIPSIT-MAILER Letters, Envelopes & Labels, made by Scripsit, BOOKKEEPING ARCHIVE—printed ledgers & statements. 1400 accounts receiveble. $34.50 each. (714) 774-9383 H.A.K. Workshop, 9791 Orange, Anaheim, CA 92804

VIC-20, COMMODORE 64, TI: Spreadsheet, File Manager, and other business programs. None more than $19.95. For details VALORUM, 441 Clyde Ave., Mountain View, CA 94043

TRS-80, ATARI SOFTWARE. Science, Mathematics, Astronomy, Music, Curve Fitting, Fourier Analysis, Statistics, Graphics, Finance. BROCHURE. Benchmark Computing Services, POB 385-B, Providence, Utah 84332.

APPLE & ATARI—Software, Herdware, books, educational, etc. Great prices, outstending service. Vulcan Software, 1805 Sauter Rd., Burlington, AL 35209.

ULTIMATE TS/ZX81 Arcade Action Software! Nebular Adventure, 18K, superb 3D graphics, send $10.00. peckege includes cassette, listing, manual & FREE keyboard overley and dustcover. R. Vishop, 2580 Lepp, Niagara Falls, Ontario L2J 3G3. U.S. Inquiries

MINI-SCRIPT WORD PROCESSING SOFTWARE—All you need to write letters/reports! Features include justification/edit. TRS-80 Mod III only Cassette $9.95. Disk $14.95. Huntley Enterprises, 4640 Mallet Street, Oakland, CA 94601-4989

SAVE ON SOFTWARE. Free catelog. Specify Computer. The Floppy Disk, Box 5392 C. North Hollywood, CA 91816

APPLE USERS PREDICT NFL RESULTS. REGULAR SEASON THROUGH SUPERBOWL. EASILY UPDATED SEND $19.95 FOR IMMEDIATE DELIVERY. VECTOR MOSER, 3504 NW 27 TERR, GAINESVILLE, FL 32605.

VIC, PET, 64 PROGRAMS. Free Catelog. Specify machine. Low Prices, Top Quality. Write C & G INC., Box 2306, Midland, Michigan 48640.

FRENCH AND MULTI-LINGUAL software for the Apple II+ or IIe. FREE CATALOG. LE PROFESSEUR, P.O. Box 301C, Swanton, Vermont 05488. (514) 747-9130

FREE CATALOG—Pet, VIC, Commodore 64 software. Books TIS, Box 921 Dept. CC10, Los Alamos, NM 87544

VIC20 and C64 SOFTWARE: Special—Eighty VIC20 Programs on two cassettes, $15.95. Postage $1.50. Public Domain. SASE to FANFARE SOFTWARE, 120 E. Main, El Cejon, CA 92020.

Send name of your computer. We'll send you periodic date on software, books and tech sheets. SUPERIOR, Dept. CR, P.O. B. M8002, Westchester, OH 45069.

ASTRONOMY—Inside Our Solor System, Apple II, Frankin, 3.3 DOS, $14.44. mEL-MARK SOFTWARE, P.O. Box 2014, Medford Lakes, NJ 08055.

TYPER-VIC-20, $9.50 word processor with many features. Requires 8k Exp, 1525 Printer, Tape. Cor Programs, Box 151, Ballston Spa, NY 12020.

HARDWARE

NEC and OKIDATA PRINTERS, AMDEK MONITORS. Free Price List. Lowest Prices! Tech-Systems, P.O. Box 585, Spring, TX 77383

FREE DISCOUNT CATALOG OF SYSTEMS, PERIPHERALS AND SOFTWARE. Most major brends. Descriptions complete with options and accessories. Please indicate your specific interest and application. Micro Trend Inc., 2001 Kirby Drive, Suite 906, Houston, TX 77019. (713) 520-0107.

NEW IBM PC-XT SALE! Discount prices hardware and software. Save on printers, monitors, peripherals. Call (213) 824-1313.

HOLIDAY SPECIAL: Prowriter 8510AT 10" parellel printer: $369. Computer Accessories Unlimited, P.O. Box 189, Elmont, NY 11003

COMPUTERS, PRINTERS, ACCESSORIES! Epson FX-80 Printer, $519.00. Gemini 10X Printer, $295.00. Okidate Prowriters, etc.—Lowest prices! Free catelog! Team Computers. (203) 777-2284. 109 Church St., Suite #303, New Haven, CT 06510.

COMPUTER EQUIPMENT/SUPPLIES

WANT A PLEASANT SURPRISE? Call or write for quotes: Atari, Commodore, Timex, TI, Corona (IBM work-alike), Amdek, Anadex, Apple & IBM accessories, Heyes, More. GET SURPRISED! HARDWARE SOFTWARE ANYWARE CO., 10 Coles Street, Brooklyn, NY 11231 (212) 596-3592.

COMPUTER PAPER—SAVE $$$—Top quality. Low single-carton prices. Free shipping via UPS. Call A-1, (800) 828-8736 or (213) 804-1270.

OFFICE AND HOME COMPUTER ACCESSORIES Wanted: Importers for beautiful Teak Wood Computer Accessories. Disk Holders, Desk Storage Drawers, Stands and Desk Accessories. Contact Asian Pacific Resources, P.O. Box 11-85, Bengkok 11, Thailand

FLIP YOUR 5¼ DISK—Use both sides, special punch, template, and instructions, $8.00. Intelec Computer Wares, 147 S. Brentwood Terr., Mt. Laurel, NJ 08054

FREE! Computer Supplies Catelog—low prices—Satisfaction guaranteed—DATA SYSTEMS, Box 99, Fern Park, Florida 32730 (305) 788-2145

COMPUTER PUBLICATIONS

MAKE MONEY NOW with microcomputer and related products! The best monthly newsletter tells how. Let us help you plan, start, grow! How, Box 218, Washington, IL 61571

HOW TO MAKE MONEY WITH YOUR MICROCOMPUTER Hard-back, 188 page guide shows how. Money back guaranteed. Send $14.95 to RH Publications, P.O. Box 105/C, Sullivan, IL 61951. Send $1.00 for specialized computer book list

VALLEY VIDEO & COMPUTER EXCHANGE. Looking to exchange computer information, buy, sell, or trede software, or video-related items?? Your 35-word message or classified ad will be printed in our new video/computer newsletter for FREE, with no obligation!! Send your ad today to: VALLEY VIDEO & COMPUTER EXCHANGE, P.O. Box 3011, Napa, CA 94558.

SAVE $ on Computer books & software! For FREE DISCOUNT CATALOG write Downtown Book Bazaer, Dept. C, P.O. Box 2490, Brooklyn, NY 11202.

FREE ISSUE—Financial advertisement newsletter with programs for home computers. Send stamped addressed envelope to ODD LOTS Publishing Company, 17596 Wildemere, Detroit, MI 48221

COMPUTER CLUB

JOIN THE BIG RED APPLE CLUB, a national Apple user's group with benefits including monthly newsletter and large library of free software. Annual membership $12. Sample newsletter $1. BIG RED APPLE CLUB, 1301 N. 19th, Norfolk, NE 68701 (402) 379-3531

JOIN A FAST GROWING COMPUTER CLUB for TRS-80 owners & users. Monthly Newsletter with FREE Programs and special club prices on computer accessories. Annual Membership $16. Enclose this Ad with membership fee and receive Free Club Hat. To: American Computer League, P.O. Box 2726, Pomona, CA 91769.

FOR SALE/BARTER

DIAMOND NEEDLES and STEREO CARTRIDGES AT DISCOUNT PRICES for SHURE, PICKERING, STANTON, EMPIRE, GRADO, AUDIO TECHNICA, ORTOFON, ADC, SONUS, MICRO-ACOUSTICS AND LAST. Send S.A.S.E., free catalog. LYLE CARTRIDGES, Dept. C, Box 69, Brooklyn, NY 11218. For fast COD service TOLL FREE 1-800-221-0906. NY state (212) 871-3303. 9AM-8PM except Sunday.

CABLE TV SECRETS, the informative publication the Cable Companies tried to ban. HBO, Movie Channel, Showtime, converters, etc. Send $8.95 to CABLE FACTS, Box 711CC, Patascala, OH 43602.

CABLE T.V. EQUIPMENT. Channel 36r4 Notch Filter $20.00. Information $1.00. Goldcoast, P.O. Box 63/6025B, Margate, FL 33063

BUSINESS OPPORTUNITIES

MAIL ORDER OPPORTUNITY! Start profitable home business without experience or capital. Information free MAIL ORDER ASSOCIATES, Dept. 563, Montvale, NJ 07645.

MAKING MONEY WITH PERSONAL COMPUTERS! Book only $5.95. Book AND Tapes $25.00. Computer Resources, 1659 Mills Street, Chula Vista, CA 92010.

EARN CASH with your computer! Great money-making ideas. Detailed instructions, getting started, successful marketing, much more. New career, wealth probable. Send $5.00. ELAN, Box 603, Menomonee Falls, WI 53051.

BUSINESS SERVICES

LOST IN THE PERSONAL AND MICRO-COMPUTER MAZE? Business Applications Systems can help you find your way. For more information, write: Business Application Systems, Dept CCM, 1734 Berry Avenue, West Los Angeles, CA 90025.

GAMES

NEW—FOR THE APPLE IIe: "LASER-BASE OMEGA" FUN, CHALLENGING. Disk $22.50 Kevin Hollis, P.O. Box 134, Blythe, CA 92226

COMPUTER FURNITURE

COMPUTER FURNITURE—SAVE 20-40%. Send $3.00 for 50 page, color catalog (refundable with order): VIXIA-Dept CC, Box 63013, Rochester, NY 14623.

TIMEX/SINCLAIR

KROK, STAR SEARCH, NOAH'S ARK, finest programs available. Machine language action, graphics. SASE Brown Cottage, 5466 Bright Hawk, Columbia, MD 21045.

"MUST-HAVE"! UTILITY SOFTWARE. Cassettes-relocatable machine language. SASE for information SIRIUS WARE, 6 Turning Mill Rd., Lexington, MA 02173.

INSTRUCTION

UNIVERSITY DEGREES BY MAIL! Bachelors, Masters, Ph.D.s ... Free revealing details. Counseling, Box 389-CE10, Tustin, CA 92680.

COMMODORE 64

ARCADE ACTION—MOVIE THRILLS—"Lightcycles", futuristic motorcycle chase-fast machine language for Commodore 64 on Disk or cassette Send $15.95 to UNICORN Box 7L, Graysummit, MO 63039.

APPLE PRODUCTS

APPLE 9-TRACK TAPE DRIVES. Read/write industry standard 800 bpi tapes on an Apple. Call/write for detailed brochure. Electrovalue Industrial Inc., Box 378-D, Morris Plains, N.J. 07950. (201) 267-1117.

MAILING LISTS

COMPUTER SHOW ATTENDEES N.Y., N.J.: 15,000 names $30/M. P/S listed. For info, (201) 297-2526.

PLANS AND KITS

APPLE PROJECTS, KITS—Programmable 30 key alphanumeric keypad under $25.00. Plans, parts list $3.95 + SASE. Catalog SASE UCS Inc. 119 West 57th Street, Suite 719, New York, NY 10019

PROJECTION TV . . . Convert your TV or COMPUTER MONITOR to project 7 foot picture . . . Results comparable to $2,500 projectors . . . Total Cost less than $30.00 . . . PLANS & LENS $19.95 . . . Illustrated information FREE Mercocoma-EB, Washington Crossing, Pennsylvania 18977 Credit card orders 24 Hours. (215) 736-3879

Printer Sound Enclosure. Under $50 Printer maintenance kit $9.99. Free infor. Hamid Company, P.O. 6950-660, Ventura, CA 93006

USERS GROUPS

VIC-20 USERS GROUP, receive newsletter, programs, discounts and more Send SASE for information, P.O. Box 459, Dept. 8, Ladson, South Carolina 29456

ALARMS

PROTECT MICROCOMPUTERS AND ELECTRONICS! Free Catalog of systems for SCHOOLS, OFFICES, HOMES. SGM Corporation, 6 West Mein, Bound Brook, NJ 08805, (201) 469-6565

$$ WE WILL NOT BE UNDERSOLD $$

FRANKLIN COMPUTERS

Ace 1000, 1200, and PRO PACK
LOWEST PRICES IN USA ! ! !

PRINTERS

New Gemini 10X	$329
Gemini 15	499
C. Itoh Prowriter (P)	385
Serial	Call
C. Itoh 1550 (P)	679
Serial	Call
Smith-Corona TPI	549
Brother HR 1	Call
Brother HR 2	Call
Okidata 82A	419
Okidata 83A	649
Okidata 92	520
Okidata 93	869

DISK DRIVES

Apple/Franklin 1 year warranty	239
Slim TEAC 1 year warranty	269
Controller Card	69
Controller Card w/Diagnostics	99

RANA ELITE SERIES APPLE COMPATIBLE

RANA ELITE One 40 TRK 163K	289
RANA ELITE Two 40 TRK DS 326K	435
RANA ELITE Three 80 TRK DS 652K	575
RANA ELITE Controller w/Drive	75

Microsoft Softcard is a registered trademark of Microsoft Corporation.

EPSON

RX 80, MX 80 FT III, MX 100 III,
FX 80, and NEW FX 100! ! !
CALL - Prices Too Low To Print

MISCELLANEOUS HARDWARE

Gibson Lite Pen	259.00
Microbuffer II 32K Parallel	249.00
Microsoft Premium Pak	479.00
Microsoft Softcard	239.00
System Saver Fan	74.95
Videx Enhancer Rev. 6	99.75
Videx Enhancer Rev. 7	117.95
Videx Function Strip	64.95
Wizzard 80 column card	179.00
with soft switch	
Wizzard 16K card	75.00

MODEMS

Hayes 300 Baud	$209	Hayes 300/1200	$485
Micromodem II	289	Apple Cat II	282.50
J Cat	129	SSM Modem Card	249

SALE COMMUNICATIONS PAK SALE

Micromodem II	269.00
Source Subscriptions	75.00
ASC II Express	49.95
ALL THREE PIECES	389.00

THE COMPUTER STORE

Dept. 345 3941 B.S. Bristol St
Santa Ana, CA 92704
(Outside CA) (800) 824-2227 Orders Only
(714) 261-1383 Technical Information

TERMS: We accept VISA, Mastercard, cash, Checks, Certified Checks, C.O.D., and Money Orders. Please add 3% for bank cards. Please add 3% for shipping.

SOFTWARE

AE	$22.21
Applewriter Preboot	43.18
Bank Street Mail	51.91
Bag of Tricks	29.63
Canyon Climber	27.34
Castle Wolfenstein	22.21
Choplifter	25.92
dBase II	420.00
Deadline	37.06
Flight Simulator	28.82
Frogger	25.92
Mask of the Sun	32.36
Master Type	32.36
Miner 2049er	32.36
Multi Plan	189.00
Mystery House	18.50
PFS: File	81.80
PFS: Graph	81.80
PFS: Report	62.70
Pinball	24.26
Pinball Construction Set	32.36
Preschool IQ Builder	19.40
Screenwriter II	420.00
Serpintine	25.92
Snack Attack	22.21
Story Machine	28.31
The Home Accountant	55.62
Typing Tutor	19.51
Visicalc	179.00
Visicalc Pre Boot	43.16
Visicalc 80 w/Memory Expand	72.31
Wordstar	199.00
Wizardry	39.08
Versa Form	279.00
1st Class Mail	55.62
Elephant Disk SSSD	18.99

ALL PRICES ARE SUBJECT TO CHANGE!

• index to advertisers •

Reader Service No.	Advertiser	Page
101	Aardvark	303
102	Abacus	288
105	Acorn	126-127
103	Accountants Microsystems Inc	321
104	Adventure International	58
106	Adventure International	83
107	Adventure International	200
•	ALF Products	251
108	Allenbach	229
109	Alpha-Com	119
110	Amencan Software Club	186
113	Ammerco Corp	290
114	Apple Computer	18-19
111	Appleware Inc	257
275	Artworks	123
112	Atlantic Computer Accessories	258
115	Avant-Gard	147
116	Beagle Brothers	307
117	Blythe Valley Software	176
118	Broderbund Software	226
119	BRS After Dark	199
•	C-Load	238
•	C-Load	269
125	Cab-Tek	313
126	Calisoft	247
120	Carolina Microsystems	245
121	CBS Computer Book Club	61
127	Central Point Software	265
274	Chadsworth Data	168
136	Chrisin Industries	151
122	Commadore Business Machines	45
235	Com-Protect, Inc	268
141	Compu Serve	171
130	Computer Advanced Ideas	29
123	Computer Book Club, The	173-175
124	Computer Discount of Amer	320
131	Computer Discount Products	236
133	Computer Exchange	90-91
262	Computer Innovations Inc	307
135	Computer Mail Order	252-253
134	Computer Outlet	240-241
137	Computer Plus	323
138	Computer Room, The	234
139	Computer Store, The	333
132	Computronics	C3
140	Continental Software	2
142	Control Data Corp	47
143	Cosmc Computers Unlimited	311
•	Counterpoint Software Inc	13
•	Counterpoint Software Inc	86
•	Counterpoint Software Inc	113
144	Creative Computer Peripherals	5
145	Data Basic Inc	135
146	Data Most	169
147	Data Soft	31
198	Dennison KYBE Corp	15
148	Design Ware	187
•	Digital Equipment	49
150	Digital Research	104
149	Dithium Press	139
151	Discount Software	260
169	Dacwasher	125
153	DK Computer Systems Inc	309
152	Downaway California	265
281	Dynacomp	65

Reader Service No.	Advertiser	Page
154	Educational Activities	41
171	Educational Media Associates	278
155	Eduware	103
•	Electronic Arts	71-78
158	Electronic Specialists	265
159	EPYX	232
156	Excalibur Technologes Corp	11
161	Fastrack Computer Products	220
178	Fiptrack Learning Systems	255
164	Franklin Computer Corp	221
166	Gentech	285
183	Happy Hands	278
175	Harmony Video & Electronics	249
•	Hayden Software	215
170	Hayes Microcomputer Products	27
172	Hayes Microcomputer Products, Inc	230-231
174	IBM Corp	140-141
176	I.J.G	208
167	Inmac	228
196	Innovative Data Technology	268
272	Interactive Structure	287
177	Kensington Microware	53
203	Kensington Microwire	106
205	Kensington Microwire	273
188	Leading Edge	9
190	Leading Edge	C4
179	Lightning Software	235
180	L N W	197
182	Lyco Computers	298-299
181	Magic Computer	145
184	Marco Polo	227
160	Master Co, Inc	48
211	Micro D	17
186	Micro Lab	21
187	Micro Management Systems Inc	312
189	Micromatic	239
241	Microsales, Inc	308
273	Micro-Sci	144
191	MMG Micro Software	295
192	Muse RHP	129
•	National Education Corp	308
193	Nasvc Software	227
162	Nebs Computer Forms	322
194	Network	115
163	Nibble Notch	270
195	Nonagon	219
•	NR Schools	111
204	OHM Electronics	320
165	Okidata	291
271	Omni Resources	55
197	Opportunities for Learning	309
•	Omega International	20
201	PSonut Software	233
199	Percom	293
200	Perfect Data	213
173	Perry Oil & Gas Company	309
206	Programmers Institute	203
207	Promentheus	192
209	Protecto	189
208	Protecto	223
210	Protecto	225

Reader Service No.	Advertiser	Page
202	Quadram	42-43
212	Quark Inc	62-63
213	Radio Shack	95-100
214	RB Robot	143
213	Reader's Digest	50-51
216	Reston Publishing	57
232	Reston Publishing	131
229	Reston Publishing	191
282	RH Electronics	318
217	Royal Software	235
218	RR Software	137
219	Howard W Sams Co	117
220	Howard W Sams Co	85
248	Satalite Software International	161
226	Sierra On-Line	182
227	Sierra On-Line	165
225	Sirius Software	67
224	Sirius Software	66
230	SJB	179
231	Skwa Enterprises Inc	239
•	Smith Corona	80
234	Snave Systems	315
233	Software City	237
236	Software Development	294
•	Software Guild, The	33-38
238	Software Models	322
240	Software T Boot	313
242	Solid Software	180
223	Southern California Research Group	257
276	Southern California Research Group	323
243	Southwestern Publishing	163
239	Spectro Video	C2
250	SSM Microcomputer	261
251	Star Micronics	289
252	Sterling Swift Publishing Co	280
254	STM Electronics	116
255	Strategic Simulations Inc	159
256	Street Electronics	216
249	Strobe Inc	177
257	Sublogic	148
258	Sunburst	270
259	Sundex Corp	205
260	Sweet Gum, Inc	264
261	Synetix	146
215	Systems Group, The	211
263	Systems Group, The	243
253	Tecmar	7
264	Terrapin	251
222	Titan Technology	187
221	Transtar	93
265	Tronix	22-23
266	Tnppe Mfg Co	259
267	Universal	263
295	Videx	25
296	Warlock Software	264
269	Winners Circle	276
268	Winners Circle	198
270	Xper Systems	68



FREE INFORMATION SERVICE

Learning more about a product that's advertised or mentioned in an article in this month's issue is as simple as 1-2-3. And absolutely free.

1 Print or type your name and address on the attached card. Use only one card per person.

2 Circle the numbers on the card that correspond to the numbers at the bottom of the advertisements or articles for which you want more information. (Key numbers for *advertised products* also appear in the Advertisers' Index.)

3 Simply mail the card, and the literature will be mailed to you free of charge by the manufacturer.

The address on the attached card is for product information only. Editorial inquiries should be directed to CREATIVE COMPUTING, 39 East Hanover Avenue, Morris Plains, New Jersey 07950.

FREE INFORMATION SERVICE

creative computing

101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125
126 127 126 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 146 149 150
151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 166 169 170 171 172 173 174 175
176 177 176 179 180 161 162 163 164 185 186 187 166 189 190 191 192 193 194 195 196 197 196 199 200
201 202 203 204 205 206 207 206 209 210 211 212 213 214 215 216 217 216 219 220 221 222 223 224 225
226 227 226 229 230 231 232 233 234 235 236 237 236 239 240 241 242 243 244 245 246 247 246 249 250
251 252 253 254 255 256 257 256 259 260 261 262 263 264 265 266 267 266 269 270 271 272 273 274 275
276 277 276 279 280 281 282 283 284 285 286 287 286 289 290 291 292 293 294 295 296 297 298 299 300
301 302 303 304 305 306 307 306 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325
326 327 326 329 330 331 332 333 334 335 336 337 336 339 340 341 342 343 344 345 346 347 346 349 350
351 352 353 354 355 356 357 356 359 360 361 362 363 364 365 366 367 366 369 370 371 372 373 374 375
376 377 376 379 380 381 382 383 384 385 386 387 386 389 390 391 392 393 394 395 396 397 396 399 400
401 402 403 404 405 406 407 406 409 410 411 412 413 414 415 416 417 416 419 420 421 422 423 424 425
426 427 426 429 430 431 432 433 434 435 436 437 436 439 440 441 442 443 444 445 446 447 446 449 450
451 452 453 454 455 456 457 456 459 460 461 462 463 464 465 466 467 466 469 470 471 472 473 474 475
476 477 476 479 480 461 462 463 464 485 486 487 466 489 490 491 492 493 494 495 496 497 496 499 500

PLEASE PRINT CLEARLY—Use only one card per person

NAME_____PHONE = (____)_____

COMPANY_____

ADDRESS_____APT_____

CITY_____STATE_____ZIP_____

(Zip code must be included to insure delivery.) Void after December 31, 1983. CC10833

4 ☐ **Send me one year of *Creative Computing* for $19.97 and bill me. (Full subscription price $24.97.)**

creative computing

101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125
126 127 126 129 130 131 132 133 134 135 136 137 136 139 140 141 142 143 144 145 146 147 146 149 150
151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 166 169 170 171 172 173 174 175
176 177 176 179 180 161 162 163 164 185 186 187 166 189 190 191 192 193 194 195 196 197 196 199 200
201 202 203 204 205 206 207 206 209 210 211 212 213 214 215 216 217 216 219 220 221 222 223 224 225
226 227 226 229 230 231 232 233 234 235 236 237 236 239 240 241 242 243 244 245 246 247 246 249 250
251 252 253 254 255 256 257 256 259 260 261 262 263 264 265 266 267 266 269 270 271 272 273 274 275
276 277 276 279 280 281 282 283 284 285 286 287 286 289 290 291 292 293 294 295 296 297 296 299 300
301 302 303 304 305 306 307 306 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325
326 327 326 329 330 331 332 333 334 335 336 337 336 339 340 341 342 343 344 345 346 347 346 349 350
351 352 353 354 355 356 357 356 359 360 361 362 363 364 365 366 367 366 369 370 371 372 373 374 375
376 377 376 379 380 381 382 383 384 385 386 387 386 389 390 391 392 393 394 395 396 397 396 399 400
401 402 403 404 405 406 407 406 409 410 411 412 413 414 415 416 417 416 419 420 421 422 423 424 425
426 427 426 429 430 431 432 433 434 435 436 437 436 439 440 441 442 443 444 445 446 447 446 449 450
451 452 453 454 455 456 457 456 459 460 461 462 463 464 465 466 467 466 469 470 471 472 473 474 475
476 477 476 479 480 461 462 463 464 485 486 487 466 489 490 491 492 493 494 495 496 497 496 499 500

PLEASE PRINT CLEARLY—Use only one card per person

NAME_____PHONE = (____)_____

COMPANY_____

ADDRESS_____APT_____

CITY_____STATE_____ZIP_____

(Zip code must be included to insure delivery.) Void after December 31, 1983. CC10832

4 ☐ **Send me one year of *Creative Computing* for $19.97 and bill me. (Full subscription price $24.97.)**

creative computing

101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 116 119 120 121 122 123 124 125
126 127 126 129 130 131 132 133 134 135 136 137 136 139 140 141 142 143 144 145 146 147 146 149 150
151 152 153 154 155 156 157 156 159 160 161 162 163 164 165 166 167 166 169 170 171 172 173 174 175
176 177 176 179 180 161 162 163 164 185 186 187 166 189 190 191 192 193 194 195 196 197 196 199 200
201 202 203 204 205 206 207 206 209 210 211 212 213 214 215 216 217 216 219 220 221 222 223 224 225
226 227 226 229 230 231 232 233 234 235 236 237 236 239 240 241 242 243 244 245 246 247 246 249 250
251 252 253 254 255 256 257 256 259 260 261 262 263 264 265 266 267 266 269 270 271 272 273 274 275
276 277 276 279 280 281 282 283 284 285 286 287 286 289 290 291 292 293 294 295 296 297 296 299 300
301 302 303 304 305 306 307 306 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325
326 327 326 329 330 331 332 333 334 335 336 337 336 339 340 341 342 343 344 345 346 347 346 349 350
351 352 353 354 355 356 357 356 359 360 361 362 363 364 365 366 367 366 369 370 371 372 373 374 375
376 377 376 379 380 381 382 383 384 385 386 387 386 389 390 391 392 393 394 395 396 397 396 399 400
401 402 403 404 405 406 407 406 409 410 411 412 413 414 415 416 417 416 419 420 421 422 423 424 425
426 427 426 429 430 431 432 433 434 435 436 437 436 439 440 441 442 443 444 445 446 447 446 449 450
451 452 453 454 455 456 457 456 459 460 461 462 463 464 465 466 467 466 469 470 471 472 473 474 475
476 477 476 479 480 461 462 463 464 485 486 487 466 489 490 491 492 493 494 495 496 497 496 499 500

PLEASE PRINT CLEARLY—Use only one card per person

NAME_____PHONE = (____)_____

COMPANY_____

ADDRESS_____APT_____

CITY_____STATE_____ZIP_____

(Zip code must be included to insure delivery.) Void after December 31, 1983. CC10831

4 ☐ **Send me one year of *Creative Computing* for $19.97 and bill me. (Full subscription price $24.97.)**

PUT STAMP HERE
THE POST OFFICE
WILL NOT DELIVER
MAIL WITHOUT
POSTAGE

creative
computing
P.O. BOX 13010
PHILADELPHIA, PA. 19101

PUT STAMP HERE
THE POST OFFICE
WILL NOT DELIVER
MAIL WITHOUT
POSTAGE

creative
computing
P.O. BOX 13010
PHILADELPHIA, PA. 19101

PUT STAMP HERE
THE POST OFFICE
WILL NOT DELIVER
MAIL WITHOUT
POSTAGE

creative
computing
P.O. BOX 13010
PHILADELPHIA, PA 19101

FRE
FRE
FRE

FREE INFORMATION

about the products and services advertised in this issue of

creative computing

See other side for directions

Introducing the Most Powerful Business Software Ever!

TRS-80™ (Model I, II, III, or 16) • APPLE™ • IBM™ • OSBORNE™ • CP/M™ • XEROX™

The VERSABUSINESS™ Series

Each **VERSABUSINESS** module can be purchased and used independently, or can be linked in any combination to form a complete, coordinated business system.

VERSARECEIVABLES™ $99.95

VERSARECEIVABLES™ is a complete menu-driven accounts receivable, invoicing, and monthly statement-generating system. It keeps track of all information related to who owes you or your company money, and can provide automatic billing for past due accounts. VERSARECEIVABLES™ prints all necessary statements, invoices, and summary reports and can be linked with VERSALEDGER II™ and VERSAINVENTORY™.

VERSAPAYABLES™ $99.95

VERSAPAYABLES™ is designed to keep track of current and aged payables, keeping you in touch with all information regarding how much money your company owes, and to whom. VERSAPAYABLES™ maintains a complete record on each vendor, prints checks, check registers, vouchers, transaction reports, aged payables reports, vendor reports, and more. With VERSAPAYABLES™, you can even let your computer automatically select which vouchers are to be paid.

VERSAPAYROLL™ $99.95

VERSAPAYROLL™ is a powerful and sophisticated, but easy to use payroll system that keeps track of all government required payroll information. Complete employee records are maintained, and all necessary payroll calculations are performed automatically, with totals displayed on screen for operator approval. A payroll can be run totally automatically, or the operator can intervene to prevent a check from being printed, or to alter information on it. If desired, totals may be posted to the VERSALEDGER II™ system.

VERSAINVENTORY™ $99.95

VERSAINVENTORY™ is a complete inventory control system that gives you instant access to data on any item. VERSAINVENTORY™ keeps track of all information related to what items are in stock, out of stock, on backorder, etc., stores sales and pricing data, alerts you when an item falls below a preset reorder point, and allows you to enter and print invoices directly or to link with the VERSARECEIVABLES™ system. VERSAINVENTORY™ prints all needed inventory listings, reports of items below reorder point, inventory value reports, period and year-to date sales reports, price lists, inventory checklists, etc.

VERSALEDGER II™ $149.95

VERSALEDGER II™ is a complete accounting system that grows as your business grows. VERSALEDGER II™ can be used as a simple personal checkbook register, expanded to a small business bookkeeping system or developed into a large corporate general ledger system **without any additional software.**

- VERSALEDGER II™ gives you almost unlimited storage capacity (300 to 10,000 entries per month, depending on the system),
- stores all check and general ledger information forever,
- prints tractor-feed checks,
- handles multiple checkbooks and general ledgers,
- prints 17 customized accounting reports including check registers, balance sheets, income statements, transaction reports, account listings, etc.

VERSALEDGER II™ comes with a professionally written 160 page manual designed for first-time users. The VERSALEDGER II™ manual will help you become quickly familiar with VERSALEDGER II™, using complete sample data files supplied on diskette and more than 50 pages of sample printouts.

SATISFACTION GUARANTEED!

Every **VERSABUSINESS™** module is guaranteed to outperform all other competitive systems, and at a fraction of their cost. If you are not satisfied with any **VERSABUSINESS™** module, you may return it within 30 days for a refund. Manuals for any **VERSABUSINESS™** module may be purchased for $25 each, credited toward a later purchase of that module.

To Order:

Write or call Toll-free (800) 431-2818
(N.Y.S. residents call 914-425-1535)

* add $3 for shipping in UPS areas
* add $5 to CANADA or MEXICO
* add $4 for C.O.D. or non-UPS areas
* add proper postage elsewhere

DEALER INQUIRIES WELCOME

All prices and specifications subject to change. Delivery subject to availability.

COMPUTRONICS INC

50 N. PASCACK ROAD, SPRING VALLEY, N.Y. 10977

* TRS-80 is a trademark of the Radio Shack Division of Tandy Corp. *APPLE is a trademark of Apple Corp. *IBM is a trademark of IBM Corp. *OSBORNE is a trademark of Osborne Corp. *CP/M is a trademark of Digital Research. *XEROX is a trademark of Xerox Corp.

THE SECRETS OF PERFECT MEMORY: ONE EARTH DOLLAR

AT LAST. THE WHOLE TRUTH ABOUT FLOPPIES

Amazing book reveals all.

How to keep mom brainwashing your disk so it never loses its memory.

How fingerprints can actually damage disks. Unretouched Kirlian photographs of UFO's (Unidentified Floppy Objects). The incredible importance of making copies: the Department of Redundancy Department—and what goes on when it goes on. Powerful secret methods that scientists claim can actually prevent computer amnesia! All this and much more.

In short, it's an 80-page plain-English graphically stunning, pocket-sized definitive guide to the care and feeding of flexible disks.

For The Book, ask your nearest computer store that sells Elephant™ disks, and bring along a buck.

For the name of the store, ask us.

ELEPHANT MEMORY SYSTEMS™ Marketed exclusively by Leading Edge Products, Inc., Information Systems and Supplies Division, 55 Providence Highway, Norwood, MA 02062. Call toll free 1-800-343-8413. In Massachusetts, call collect (617) 769-8150. Telex 951-624.

CIRCLE 190 ON READER SERVICE CARD